

1425585

https://www.phoenixcontact.com/us/products/1425585

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Power, 5-position, Socket, straight, M12-Standard, coding: L, on free cable end, Rear mounting, M16 x 1.5, Individual wires, cable length: 0.2 m, 2.50 mm^2 , PEX litz wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239516

Your advantages

- · For compact devices: transmit high power in a confined space
- Easy-to-install, optimized XL housing contour with wrench size 19
- Mechanical tightening limitation for long-term-stable gasket
- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

Item number	1425585
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB24
Product key	ABQCHG
Catalog page	Page 286 (C-2-2019)
GTIN	4055626424347
Weight per piece (including packing)	52.8 g
Weight per piece (excluding packing)	51.6 g
Customs tariff number	85444290
Country of origin	DE



1425585

https://www.phoenixcontact.com/us/products/1425585

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Notes on operation	FE not connected to metal parts that can be touched, no protective function
Order information:	Lock nut is included in the scope of delivery
General	Contact connection method: Crimp connection

Mounting

Mounting type	Rear mounting M16 x 1.5 XL version, with flat nut, tightening limitation
Assembly note	XL version, with flat nut, tightening limitation

Product properties

Product type	Circular connectors (device side)
Sensor type	Power
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	L
Thread type	M12

Data management status

Article revision

Insulation characteristics		
Overvoltage category	III	

11

3

Material specifications

Degree of pollution

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated
Conductor material	Tin-plated Cu litz wires

Electrical properties



1425585

https://www.phoenixcontact.com/us/products/1425585

Rated surge voltage	1.5 kV
	1.5 kV AC/DC
Nominal voltage U _N	63 V DC
Nominal current I _N	16 A
Test voltage	1.5 kV

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Socket
Conductor cross section	2.5 mm²

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
mocration/witharawar byolco	- 100

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Head locking type	Standard
Coding	L

Connection 2

Head design	free cable end
i icad design	ii cc cabic ciid

Cable/line

Cable length	0.2 m
Cable type	PEX litz wire
Signal type/category	Power
Single wire, color	brown 1, white 2, blue 3, black 4, pink FE
Cable cross section	2.5 mm²
Conductor material	Tin-plated Cu litz wires
AWG signal line	14
Halogen-free	according to IEC 60754-1
Flame resistance	in acc. with UL FT-2
Ambient temperature (operation)	-40 °C 105 °C (cable, fixed installation)
	-25 °C 105 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions



1425585

Note

https://www.phoenixcontact.com/us/products/1425585

D () (ID07
Degree of protection	IP67
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 105 °C (Cable, flexible installation)
	-40 °C 105 °C (cable, fixed installation)
andards and regulations	
Flame resistance	in acc. with UL FT-2
M12	
Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111
·	120 01070 2 111


In line with




1425585

https://www.phoenixcontact.com/us/products/1425585

Drawings



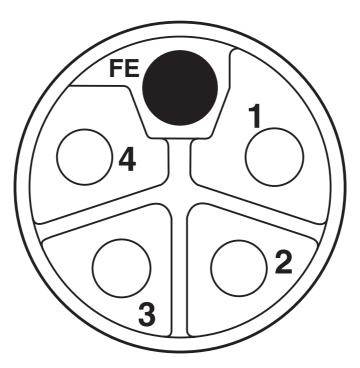

Pin assignment of M12 socket, 5-pos., L-coded, socket side view



1425585

https://www.phoenixcontact.com/us/products/1425585

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1425585

e 911 us	cULus Recognized Approval ID: E468743-20180113				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		63 V	16 A	14 - 14	-



1425585

https://www.phoenixcontact.com/us/products/1425585

Classifications

ECLASS

UNSPSC



1425585

https://www.phoenixcontact.com/us/products/1425585

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f6e0f495-5911-442f-b738-fa2fb5483178

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com