

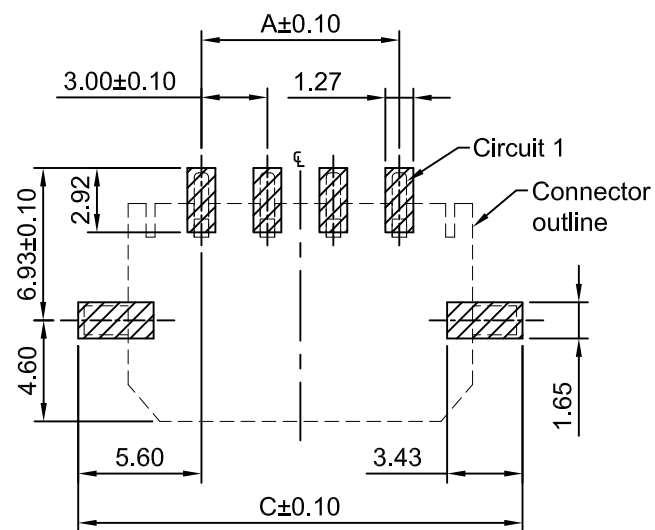


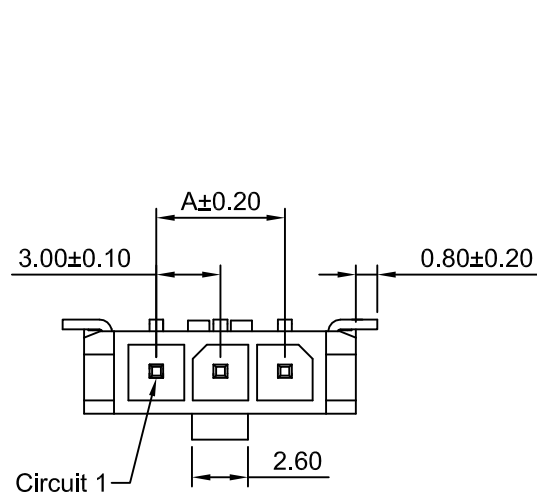

P.C.B LAYOUT
TOLERANCE:±0.05





SPECIFICATIONS:

Current Rating: 8.5A AC,DC (AWG #16)
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Matte Tin over Nickel
Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C3030WR-S-2P	3.00	9.65	14.20
C3030WR-S-3P	6.00	12.65	17.20
C3030WR-S-4P	9.00	15.65	20.20
C3030WR-S-5P	12.00	18.65	23.20
C3030WR-S-6P	15.00	21.65	26.20
C3030WR-S-7P	18.00	24.65	29.20
C3030WR-S-8P	21.00	27.65	32.20
C3030WR-S-9P	24.00	30.65	35.20
C3030WR-S-10P	27.00	33.65	38.20
C3030WR-S-11P	30.00	36.65	41.20
C3030WR-S-12P	33.00	39.65	44.20

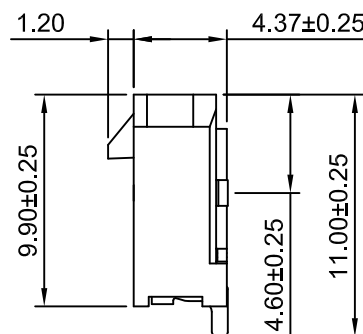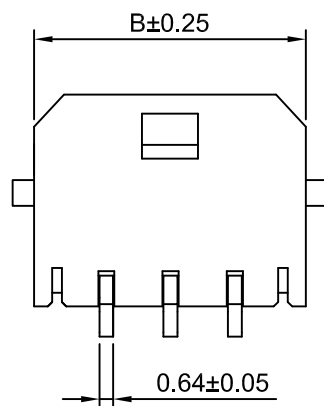

Ordering Information:

C3030WR-S-XP - ***
1 2

1.Part NO.

2.Finish:


(Blank):Matte Tin over Nickel
G:Gold over Nickel(1u")
G3:Gold over Nickel(3u")
G15:Gold over Nickel(15u")
G30:Gold over Nickel(30u")

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 2	3.00mm PITCH RIGHT-ANGLE SINGLE ROW WAFER - SMD TYPE	
DRAWN	CHKD	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C3030WR-S-XP	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				


A0	NEW RELEASE	2011.12.13
REV	DESCRIPTION	DATE




2P




3P




4P

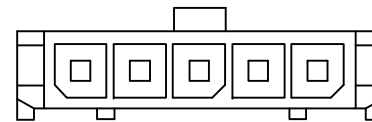


5P

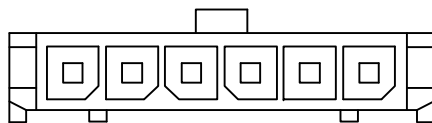


6P

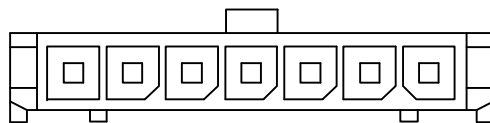


7P

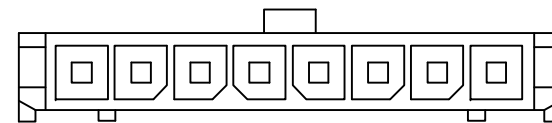


8P

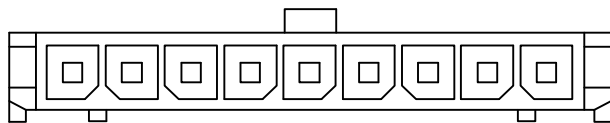


9P

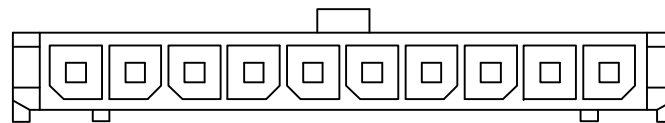

10P

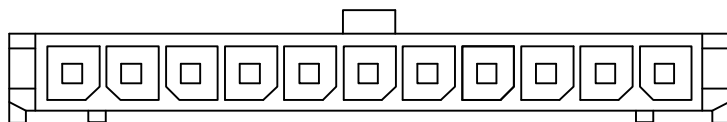

11P

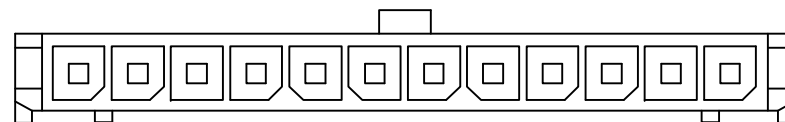

12P

A0	NEW RELEASE	2011.12.13
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE	
mm	3:1	2 of 2	3.00mm PITCH RIGHT-ANGLE SINGLE ROW WAFER - SMD TYPE	
DRAWN	CHKD	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances	THIRD ANGLE PROJECTION		DRAWING NO.	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			C3030WR-S-XP	
			REV A0	