




MTA 156

TE Internal #: 3-644465-2  
Connector Assembly, Receptacle, Wire-to-Board, 2 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-2, MTA 156, Rectangular Power Connectors

[View on TE.com >](#)

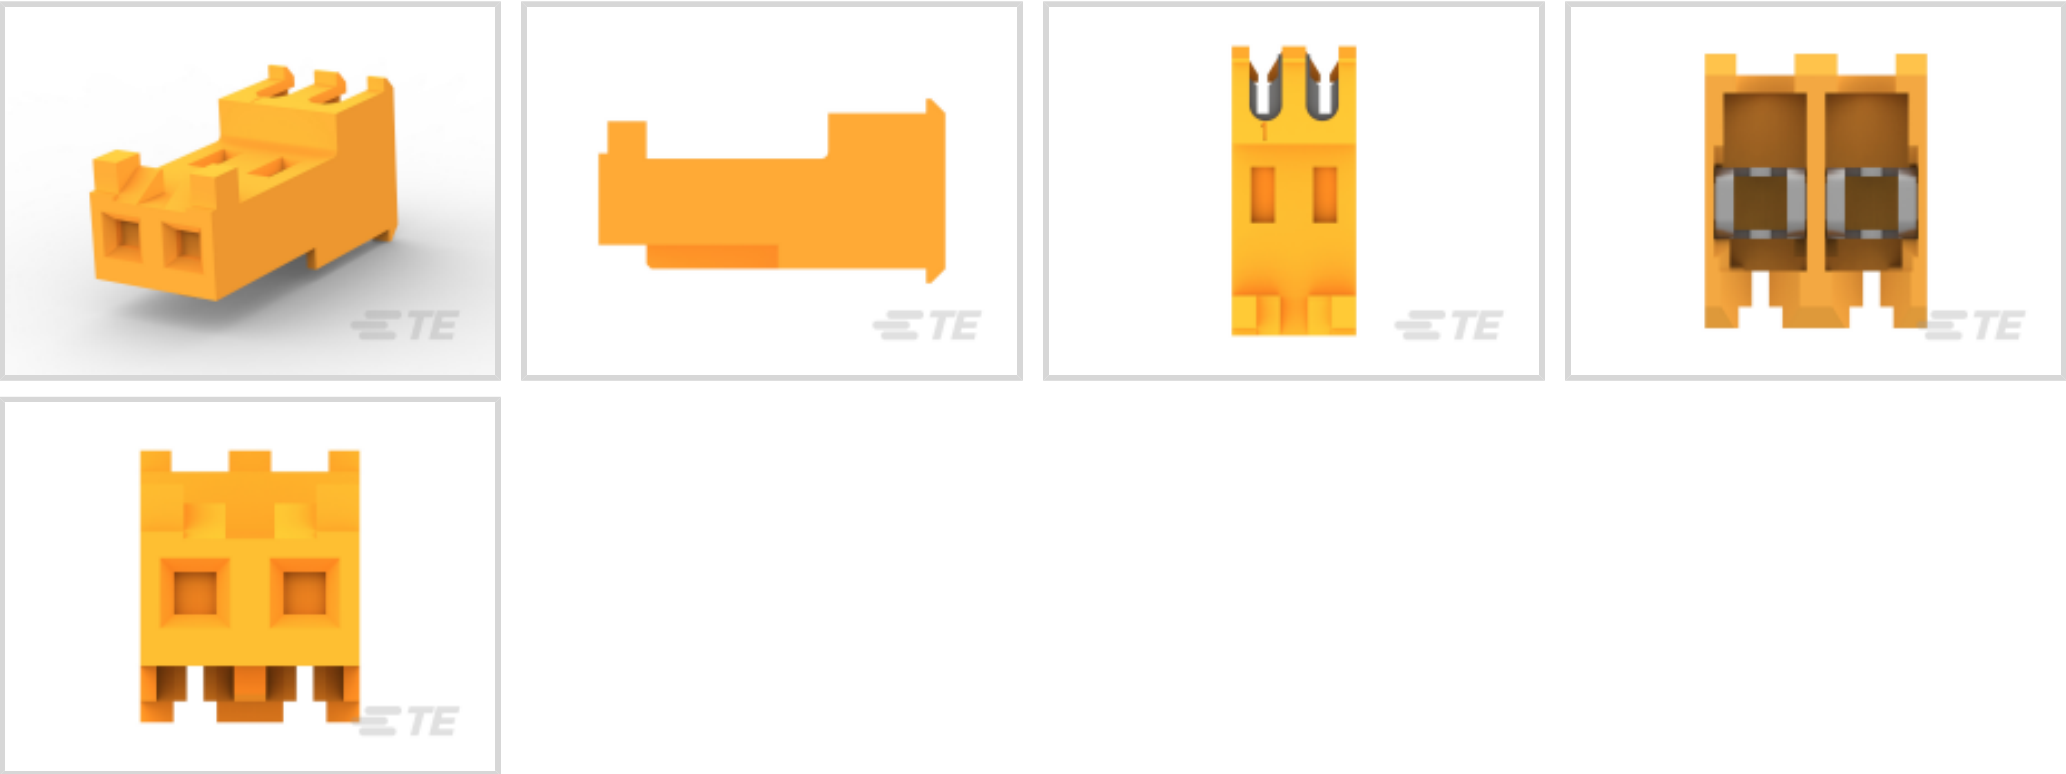Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Connector Assembly**  
Connector & Housing Type: **Receptacle**  
Connector System: **Wire-to-Board**  
Number of Positions: **2**  
Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

|                                    |                    |
|------------------------------------|--------------------|
| Compatible With Discrete Wire Type | Stranded           |
| Rectangular Power Connector Type   | Connector Assembly |
| Connector & Housing Type           | Receptacle         |
| Connector System                   | Wire-to-Board      |
| Sealable                           | No                 |
| Connector & Contact Terminates To  | Wire & Cable       |

Configuration Features

|                           |   |
|---------------------------|---|
| Number of Positions       | 2 |
| Number of Power Positions | 2 |
| Number of Rows            | 1 |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 600 VAC |
|-------------------|---------|

Body Features

|                  |     |
|------------------|-----|
| Cable Exit Angle | 90° |
|------------------|-----|



|                                                 |                               |
|-------------------------------------------------|-------------------------------|
| Connector Profile                               | Standard                      |
| Contact Features                                |                               |
| Contact Layout                                  | Inline                        |
| Contact Underplating Material Thickness         | 30 µm[.762 µin]               |
| Wire Contact Termination Area Plating Thickness | 2.03 – 5.08 µm[80 – 200 µin]  |
| Contact Mating Area Plating Material            | Tin                           |
| Contact Mating Area Plating Material Finish     | Matte                         |
| Contact Underplating Material                   | Nickel                        |
| Contact Base Material                           | Copper Alloy                  |
| Contact Current Rating (Max)                    | 7 A                           |
| Contact Retention Within Housing                | With                          |
| Contact Type                                    | Receptacle                    |
| Wire Contact Termination Area Plating Material  | Tin                           |
| Contact Mating Area Plating Material Thickness  | 2.03 µm[80 µin]               |
| Termination Features                            |                               |
| Termination Method to Wire & Cable              | Insulation Displacement (IDC) |
| Mechanical Attachment                           |                               |
| Strain Relief                                   | With                          |
| Mating Alignment Type                           | Polarizing Tab                |
| Mating Retention                                | With                          |
| Mating Alignment                                | With                          |
| Contact Retention Type Within Housing           | Locking Lance                 |
| PCB Mount Alignment                             | Without                       |
| Panel Mount Feature                             | Without                       |
| PCB Mount Retention                             | Without                       |
| Mating Retention Type                           | Locking Ramp                  |
| Connector Mounting Type                         | Cable Mount (Free-Hanging)    |
| Housing Features                                |                               |
| Wire & Cable IDC Installation Type              | Feed Through                  |
| Centerline (Pitch)                              | 3.96 mm[.156 in]              |
| Housing Color                                   | Orange                        |
| Housing Material                                | Nylon                         |



Dimensions

|                                      |                      |
|--------------------------------------|----------------------|
| Connector Height                     | 9.78 mm[.385 in]     |
| Product Length                       | 7.92 mm[.312 in]     |
| Compatible Insulation Diameter Range | 2.41 mm[.095 in]     |
| Wire Size                            | .823 mm <sup>2</sup> |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Industry Standards

|                                             |                               |
|---------------------------------------------|-------------------------------|
| CSA Rating                                  | Certified, LR 7189            |
| UL Rating                                   | Recognized                    |
| Compatible With Agency/Standards Products   | CSA, UL                       |
| Compatible With Approved Standards Products | UL E28476                     |
| UL Flammability Rating                      | UL 94V-2                      |
| Glow Wire Rating                            | Standard Part - Not Glow Wire |

Packaging Features

|                    |           |
|--------------------|-----------|
| Packaging Quantity | 250       |
| Packaging Method   | Bag & Box |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)





|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                             |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

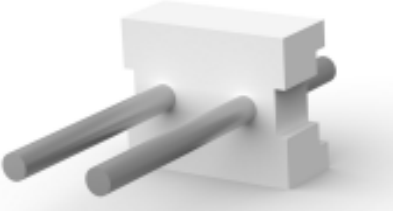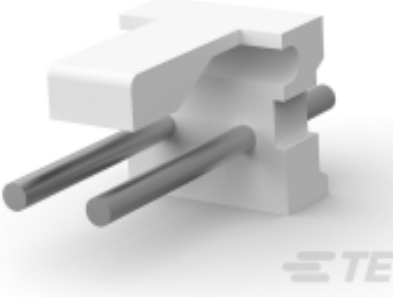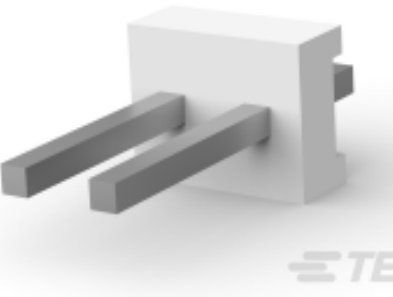Compatible Parts

|                                                                                                                                                       |                                                                                                                                              |                                                                                                                                                    |                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part # 58074-1<br/>MTA 50/100/156 MANUAL TOOL<br/>FRAME</p> |  <p>TE Part # 59804-1<br/>MAINTENANCE TOOL</p>            |  <p>TE Part # 640384-2<br/>02P MTA156 HDR ASSY STR RND SN</p> |  <p>TE Part # 640643-2<br/>02P MTA156 COVER F/T</p>           |
|  <p>TE Part # 643067-2<br/>02P MTA156 MOLDED COVER</p>             |  <p>TE Part # 640551-2<br/>02P MTA156 COVER</p>           |  <p>TE Part # 640389-2<br/>02P MTA156 HDR ASSY SQ R/A F/L</p> |  <p>TE Part # 644752-2<br/>02P MTA156 HDR ASSY SQ STR F/L</p> |
|  <p>TE Part # 640388-2<br/>02P MTA156 HDR ASSY RN STR F/L</p>      |  <p>TE Part # 640385-2<br/>02P MTA156 HDR ASSY SQ R/A</p> |  <p>TE Part # 640445-2<br/>02P MTA156 HDR ASSY FL/STR SN</p>  |  <p>TE Part # 640383-2<br/>02P MTA156 HDR ASSY STR SQ SN</p>  |





TE Part # 2-647127-2  
02P MTA156 SHRD HDR ASSY LF



TE Part # 643071-2  
02P MTA156 FD-THRU COVER



TE Part # 644751-2  
02P MTA156 HDR ASSY R/A



TE Part # 3-644611-2  
02P MTA156 HDR POL WO PEGS LF



TE Part # 640631-3  
MTA .156 CONTACT BRNBR



TE Part # 2-647123-2  
02P MTA156 SHRD HDR ASSY SQ SN



TE Part # 644753-2  
02P MTA156 HDR ASSY RN STR F/L



TE Part # 3-644615-2  
02P MTA156 POL HDR ASSY LF

Also in the Series | MTA 156



Connector Caps & Covers(89)



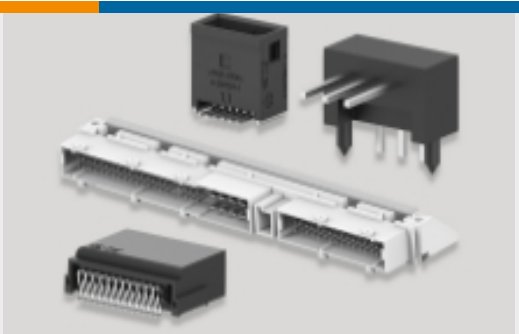
Connector Contacts(4)



Connector Hardware(2)



Insertion & Extraction Tools(1)



PCB Headers & Receptacles(677)



Rectangular Power Connectors(331)



Standard Rectangular Connectors(336)

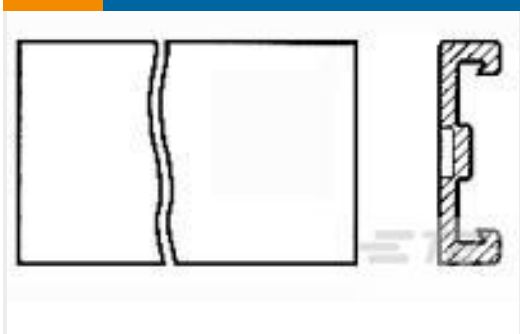
Customers Also Bought



TE Part #3-640621-3  
03P MTA100 CONN ASSY F/T NATL



TE Part #8-1879337-8  
CPF 0603 20K 1% 50PPM 1K RL



TE Part #640643-2  
02P MTA156 COVER F/T



TE Part #6-160430-6  
187 FASTON REC 20-16 AWG BR



TE Part #1614881-9  
CPF0603 3K3 0.1% 25PPM 1K RL

TE Part #9-1879336-1  
CPF 0603 2K0 1% 50PPM 1K RL

TE Part #4-2176090-0  
RP 1J 0.166W 332K 0.1% 25PPM 1K RL

TE Part #9-2176087-8  
RP 1J 0.166W 715R 0.1% 25PPM 1K RL

TE Part #644753-2  
02P MTA156 HDR ASSY RN STR F/L

TE Part #1487594-3  
USB, A-B, 28/28, BLACK, 0.16M

Documents

Product Drawings

02P MTA156 CONN ASSY 18AWG ORA

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_3-644465-2\_E.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_3-644465-2\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_3-644465-2\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

Japanese

Application Specification

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

Japanese



Application Specification

English

Agency Approvals

Agency Approval Document

English