




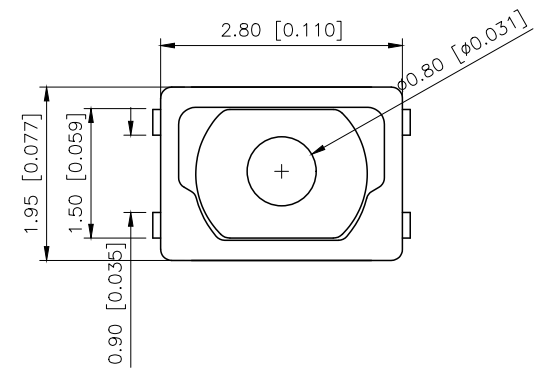




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.06	阿树

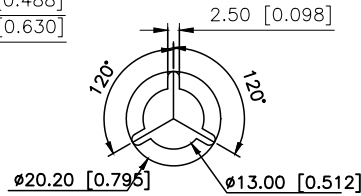


SC 1:150





DETAL:A
SC
10:1

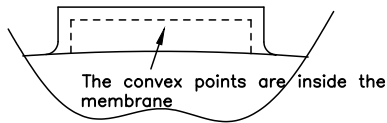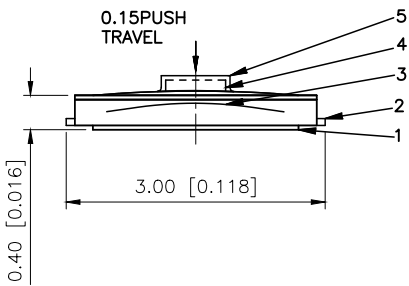


TEASCALE:2.5/1

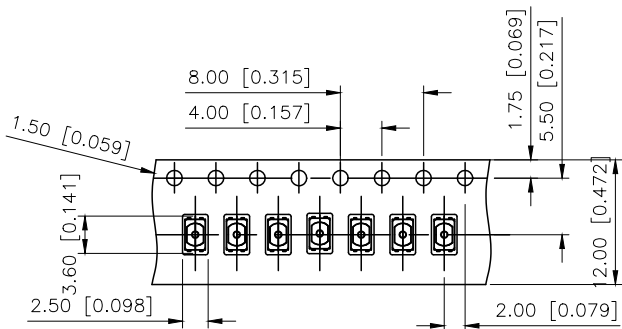

SC 1:10

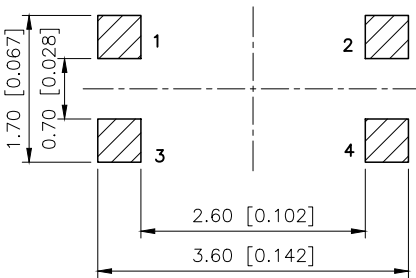

Recommended PAD Layout
Recommended solder
thickness:T=0.10±0.01



CIRCUIT DIAGRAM

PAPT NO	TS-1928-X
Operating Force	B:160gf C:260gf

5	COVER	1	PA	WHITE
4	KNOB	1	PI	BLACK
3	CONTACT	2	SUS	Ag-Plate
2	TERMINAL	2	PHOSPHOR BRONZE	Ag-Plate
1	CASE	1	PPA	BLACK
ITEM	PART NAME	QTY	MATERIAL	FINISH

- 1.RATING:DC 12V,50mA MAX
- 2.TRAVEL:0.15±0.1mm
- 3.LIFE:300,000cycles
- 4.PACKAGE:10000Pcs/Reel

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: TACT SWITCH
CHECKED		UNIT: mm/in	PART NO.: TS-1928-X
APPROVED		SIZE: A4	DWG NO.: