



E-NETTR T1/CEPT/ISDN-PRI Transformer


P/N: H0803G

- * Lead-Free & Designed to meet RoHS requirement
- * Designed to meet IR 255°C peak Requirement.
- * Operating temperature range: -40°C to +125°C
- * Storage temperature range: -40°C to +85°C

Electrical Specifications@25 ° C

Part Number	Turn Ratio (±3%)	OCL(uH) @ 10KHz/0.05V	DCR (Ω)		Hi-Pot (Vrms MIN)
	1-3:6-8	PRI	PRI	SEC	PRI to SEC
H0803G	1CT:1.33CT	1.5mH±50%	0.37±15%	0.51±15%	AC1500 / 0.5mA/2s

Mechanica

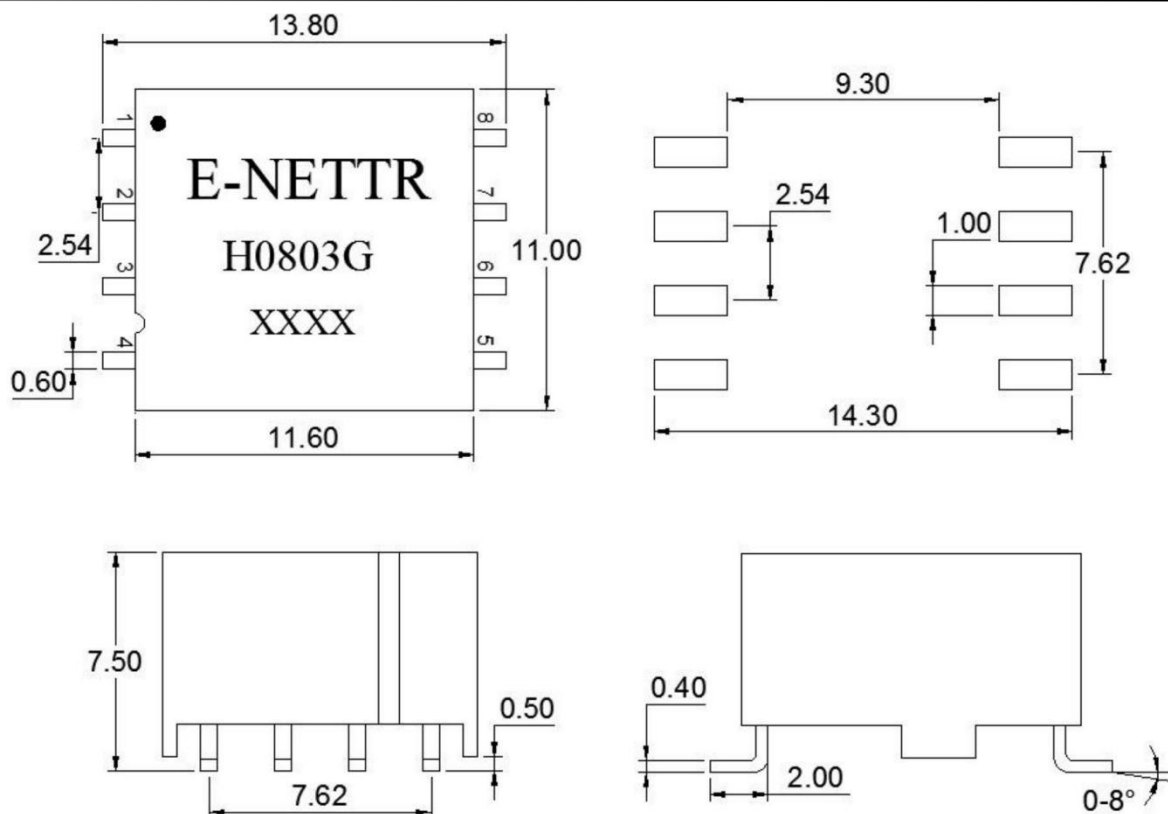

Unless otherwise specified tolerances: xx.xo ± 0.25mm
o.xx ± 0.05mm

Schematic

