
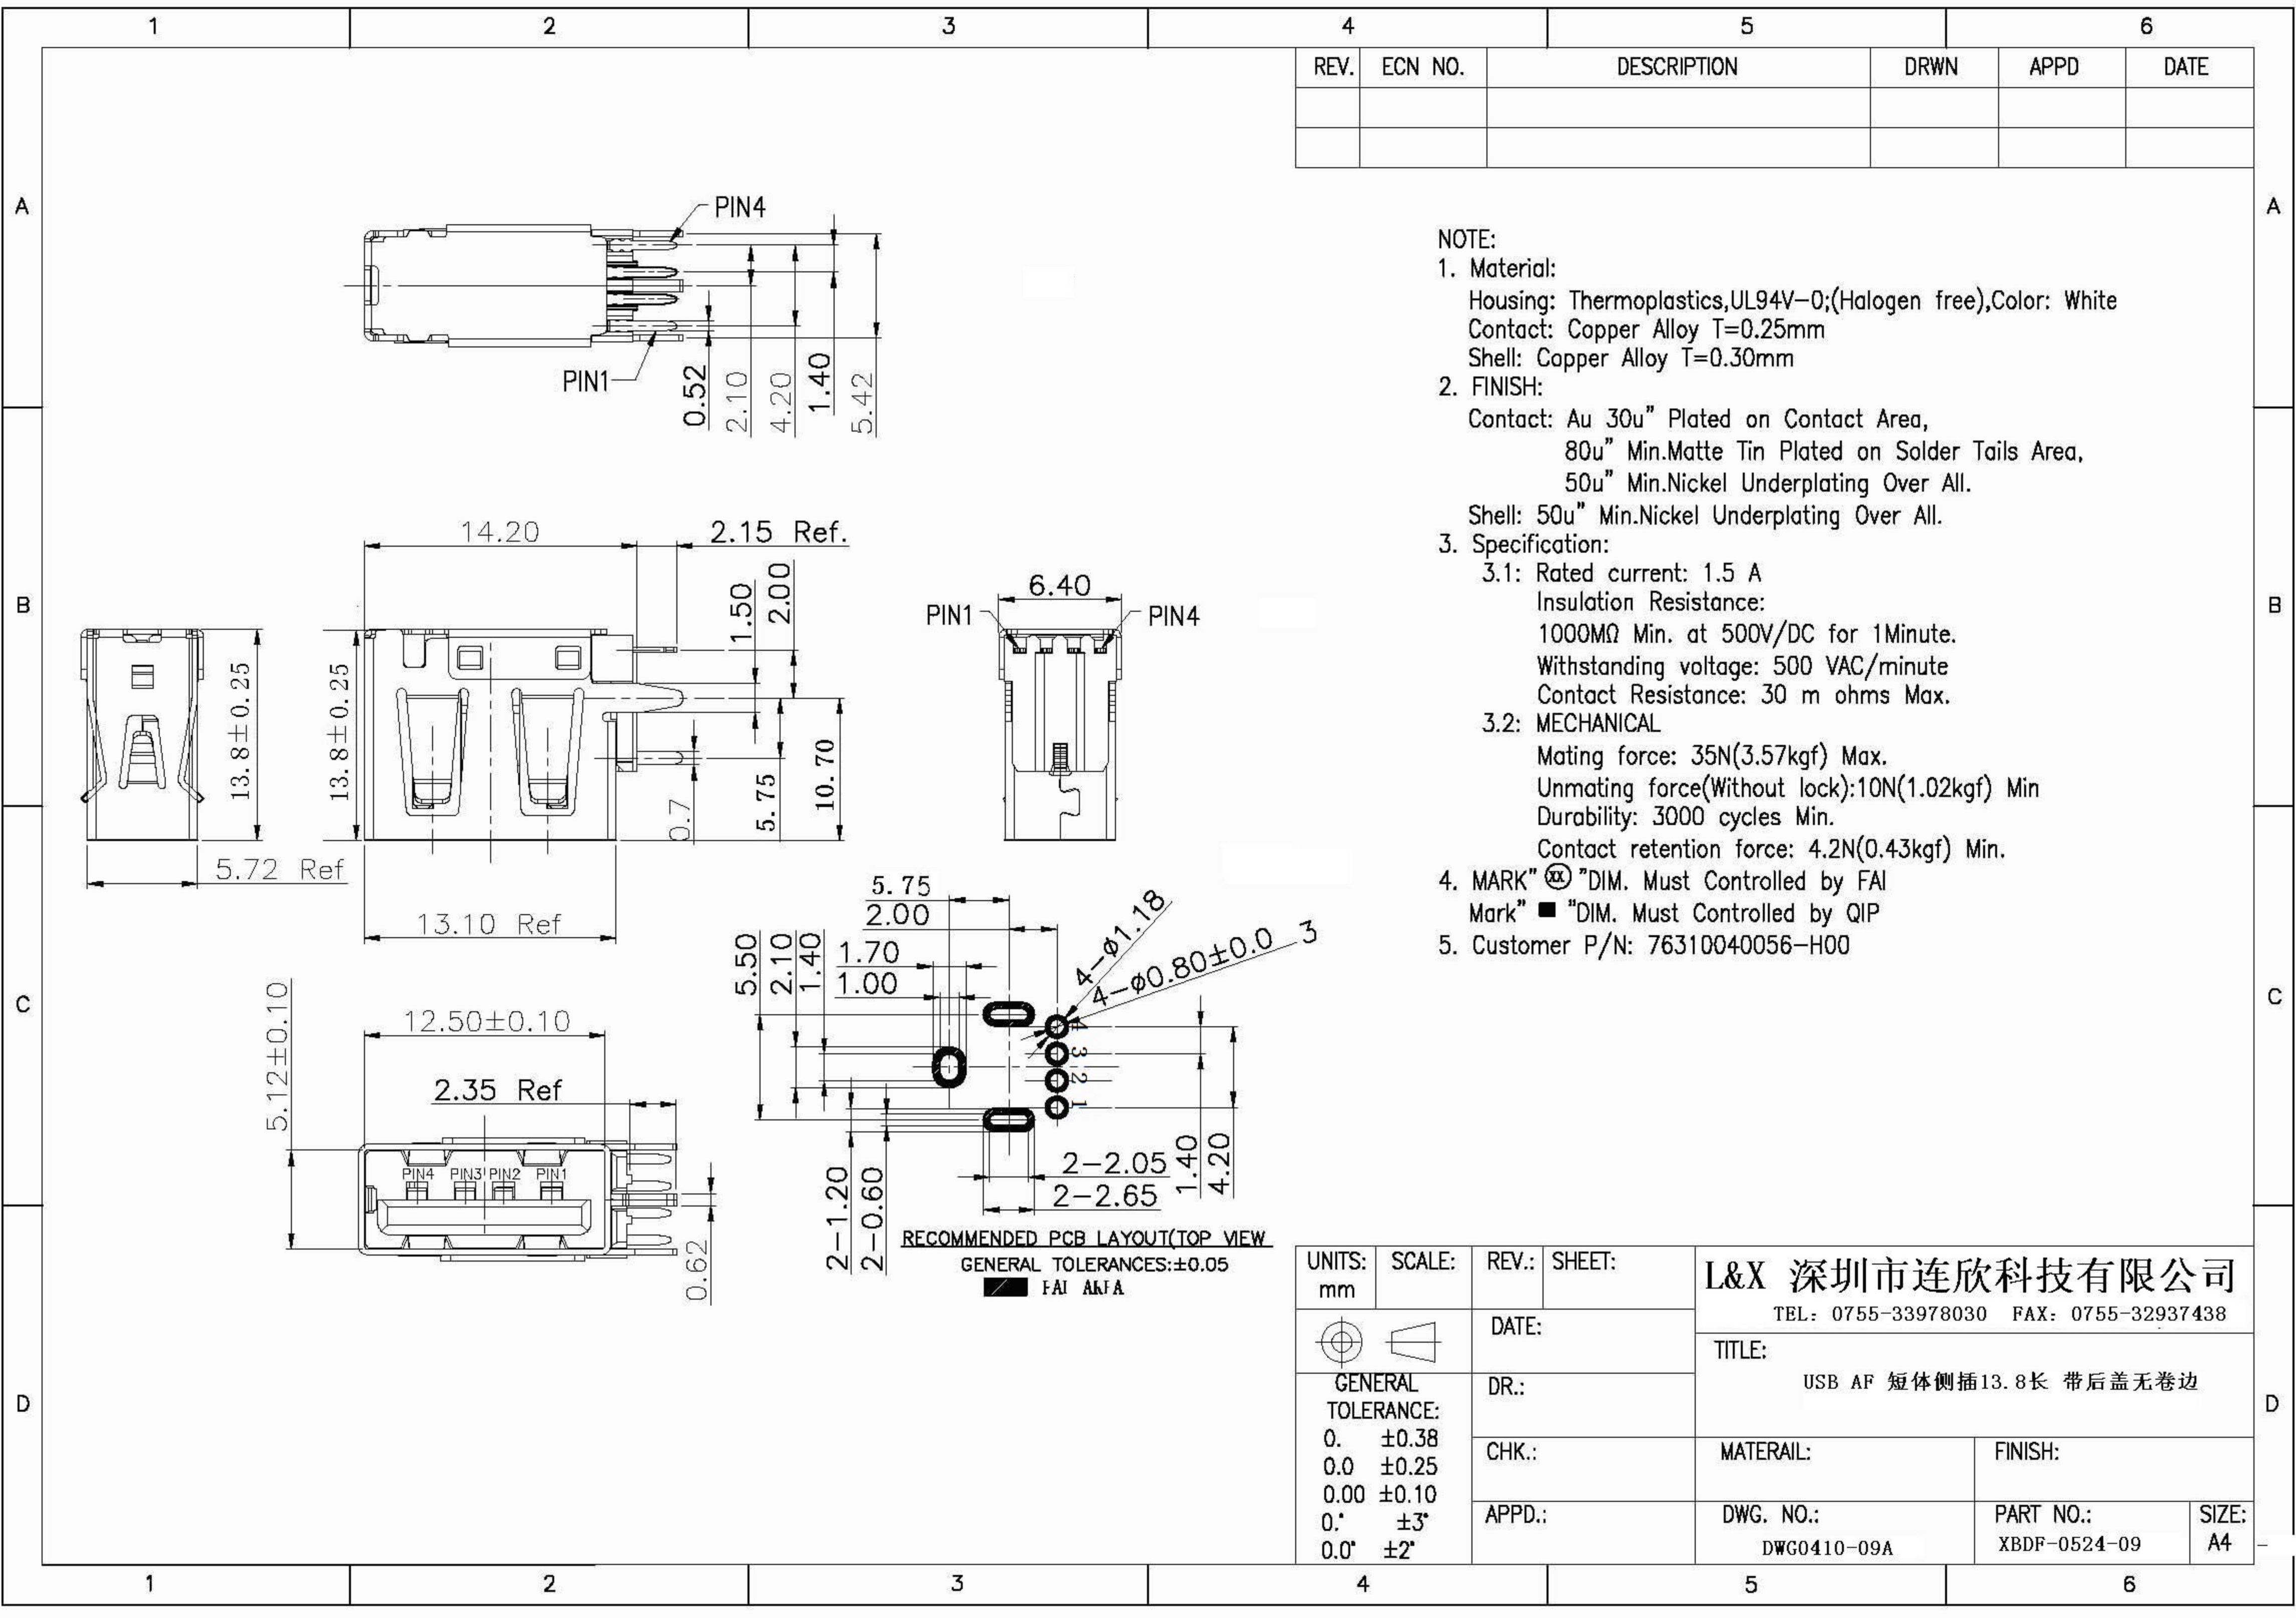




4		5		6	
REV.	ECN NO.	DESCRIPTION	DRWN	APPD	DATE

- NOTE:
- Material:
Housing: Thermoplastics, UL94V-0; (Halogen free), Color: White
Contact: Copper Alloy T=0.25mm
Shell: Copper Alloy T=0.30mm
 - FINISH:
Contact: Au 30u" Plated on Contact Area,
80u" Min. Matte Tin Plated on Solder Tails Area,
50u" Min. Nickel Underplating Over All.
Shell: 50u" Min. Nickel Underplating Over All.
 - Specification:
3.1: Rated current: 1.5 A
Insulation Resistance:
1000MΩ Min. at 500V/DC for 1Minute.
Withstanding voltage: 500 VAC/minute
Contact Resistance: 30 m ohms Max.
3.2: MECHANICAL
Mating force: 35N(3.57kgf) Max.
Unmating force(Without lock): 10N(1.02kgf) Min
Durability: 3000 cycles Min.
Contact retention force: 4.2N(0.43kgf) Min.
 - MARK "⊗" "DIM. Must Controlled by FAI
Mark "■" "DIM. Must Controlled by QIP
 - Customer P/N: 76310040056-H00

UNITS: mm	SCALE:	REV.:	SHEET:	L&X 深圳市连欣科技有限公司				
				DATE:		TEL: 0755-33978030 FAX: 0755-32937438		
				TITLE:		USB AF 短体侧插13.8长 带后盖无卷边		
GENERAL TOLERANCE: 0. ±0.38 0.0 ±0.25 0.00 ±0.10 0.° ±3° 0.0° ±2°		DR.:		MATERAIL:				
		CHK.:					FINISH:	
		APPD.:		DWG. NO.:		PART NO.:		SIZE:
				DWG0410-09A		XBDF-0524-09		A4