

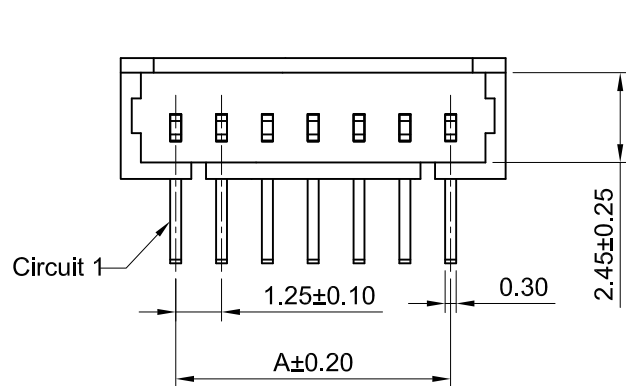

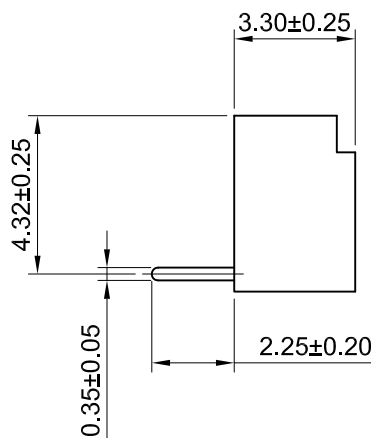
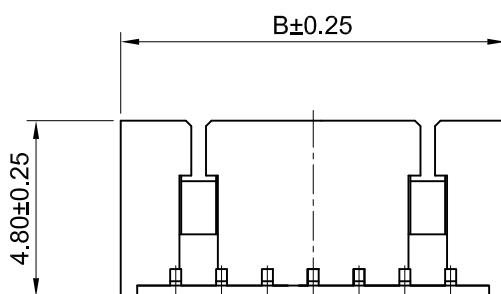


P.C.B LAYOUT



2P



3P

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: Nylon 46,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	4.30	12P	13.75	16.80
3P	2.50	5.55	13P	15.00	18.05
4P	3.75	6.80	14P	16.25	19.30
5P	5.00	8.05	15P	17.50	20.55
6P	6.25	9.30	16P	18.75	21.80
7P	7.50	10.55	17P	20.00	23.05
8P	8.75	11.80	18P	21.25	24.30
9P	10.00	13.05	19P	22.50	25.55
10P	11.25	14.30	20P	23.75	26.80
11P	12.50	15.55			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw By:		Approved :
Dlankul Wan		Jack Yin

Title :

1.25mm Pitch

90° Wafer

DRAW NO : A1251WR-XP-46

REV
A2

A2	CHANGE THE DRAW NO.	2018.12.06
A1	Modify drawings	2016.03.20
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

General Tolerance	
x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	