




Part Number : [348978201](#)
Product Description : Mini50 Unsealed Header, Right-Angle, SMT, Dual Row, 20 Circuits, Tin (Sn) Plating, Polarization Option B, Gray, Tape and Reel
Series Number : 34897
Status : Active
Product Category : PCB Headers and Receptacles
Packaging Alternative : [348979201 \(Tube\)](#)

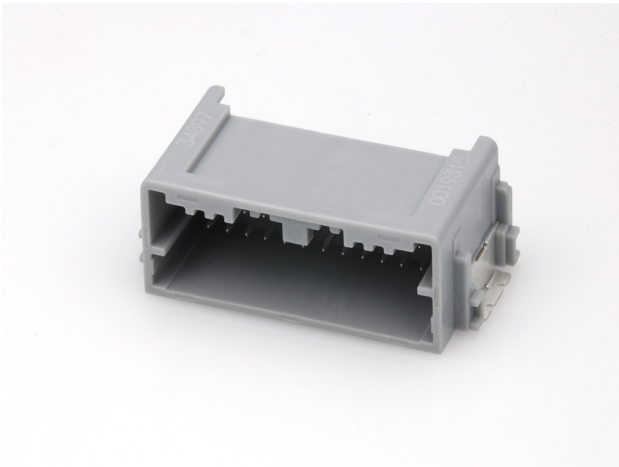

Documents & Resources

Drawings
[Drawing 348978201_sd.pdf](#)
[Packaging Design Drawing PK-31301-786-001.pdf](#)
[Packaging Design Drawing PK-31301-786-001.pdf](#)

3D Models and Design Files
[3D Model 348978201_stp.zip](#)

Specifications
[Application Specification AS-34791-020-CH-001.pdf](#)
[Test Summary 347910020-TS-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

[Multiple Part Product Compliance Statements](#)
- Eu RoHS

- REACH SVHC

- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D

- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	34897
Description	Mini50 Unsealed Header, Right-Angle, SMT, Dual Row, 20 Circuits, Tin (Sn) Plating, Polarization Option B, Gray, Tape and Reel
Application	Automotive, Power, Signal, Wire-to-Board
Component Type	PCB Header
Product Family	Mini50 Connection Systems
Product Name	Mini50
UPC	887191459318

Electrical

Current - Maximum per Contact	4.0A (for reference only)
Voltage - Maximum	14V (typical operating)

Physical

Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Gray
First Mate / Last Break	No
Glow-Wire Capable	No

Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	SPS
Net Weight	3.432/g
Number of Rows	2
Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
PCB Retention	Yes
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Temperature Range - Operating	-40° to +100°C
Termination Interface Style	Surface Mount

Solder Process Data

Lead-Free Process Capability	N/A
------------------------------	-----

Mates With / Use With

Mates with Part(s)

Description	Part Number
Mini50 Unsealed Dual Row Receptacles	<u>206523</u>
Mini50 Unsealed Dual Row Receptacle Housings	<u>34824</u>