



DESCRIPTION: M12 MALE - PANEL MOUNT (REAR) - SOLDER CUP - 5 POS.



PANEL CUTOUT

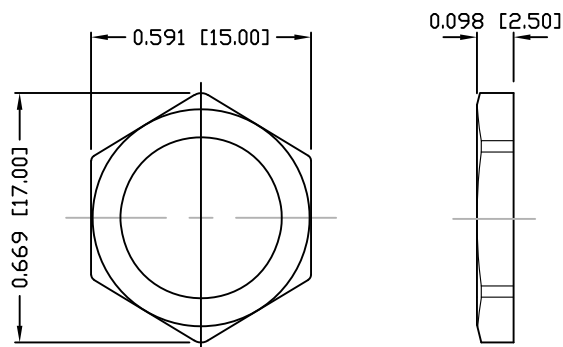

NUT

NOTE:

MATERIAL

HOUSING:
CONTACT:
NUT:
SHELL:
O-RING:

PBT UL94V-0, BLACK
BRASS
BRASS
BRASS
EPDM

FINISH

CONTACT:

GOLD PLATED
OVER 50µ" NICKEL
NICKEL PLATED
NICKEL PLATED



ELECTRICAL

RATED CURRENT:
RATED VOLTAGE:
INSULATION RESISTANCE:
CONTACT RESISTANCE:
WATER PROOF:

5A
125V
100 MΩhms MIN.
10 mΩhms MAX.
IP67

ENVIRONMENT


OPERATION TEMPERATURE: -40°C TO +85°C
WIRE GAUGE: 24-28 AWG

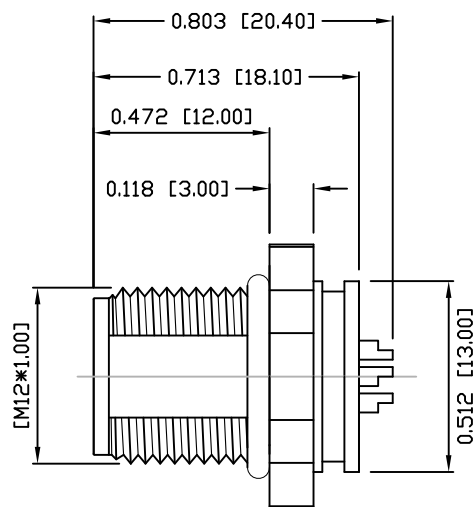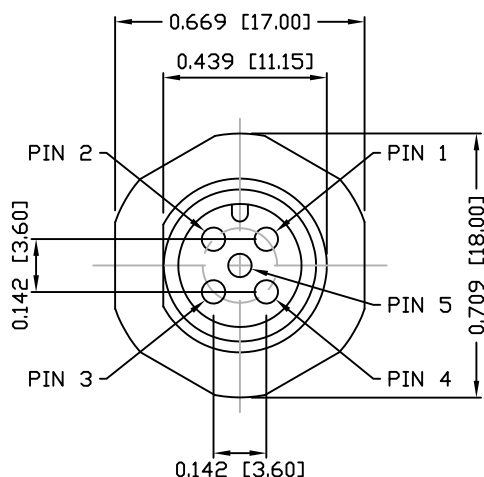

3 = BRASS/NICKEL SHELL & NUT
S = STAINLESS STEEL SHELL & NUT

859-005-103R00Y

1 = GOLD FLASH
4 = 10µ" GOLD

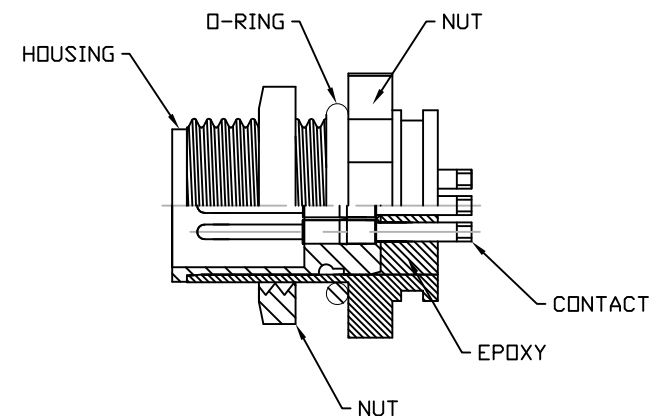

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

03-07-16

NorComp

SCALE:

NTS

SHEET

1

OF

1

REV

2

DWG NO.

859-005-103R00Y

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[859-005-103R001](#)