
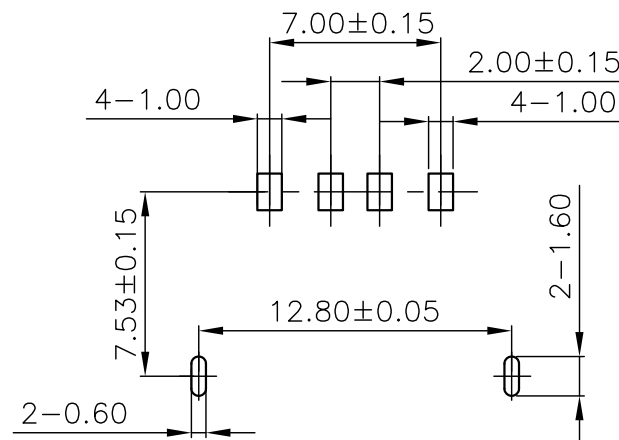


| SYM | ECN No. | MODIFICATION | DATE | ISSUED |
|-----|---------|--------------|------|--------|
|     |         |              |      |        |

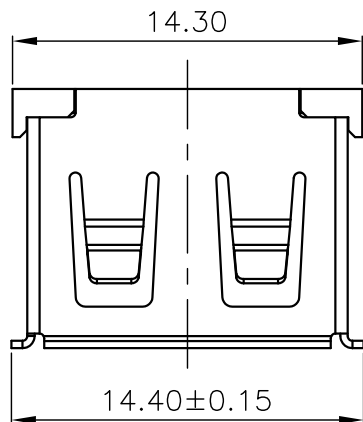

Note:

## 1.Material:

1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0

1.2,Contact: copper alloy,t=0.25mm

1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

## 2.Specification:

2.1,Current rating:1.5A Max.

2.2,Dielectric withstanding

voltage: 100 V(ac) for 1 min.

2.3,Contact resistance: 30 mΩ Max.

2.4,Insulation resistance: 100 MΩ Min.

2.5,Total mating force: 3.57 Kg Max.

2.6,Total unmating force: 1.0 Kg Min.

## 3.Finish:

3.1,Contact: Plated Gold in Mating Area:  
Tin On Solder Tails

Shell: Nickel Plating



## 4.Environmental:

4.1,Temperature range: -55°C~85°C

## PART ON:

912-11XAXXX2S1XX

- 电镀规格: 02, 镀金1u" 04, 镀金3u" 07, 镀金15u" 08, 镀金30u"
- 端子材质: 1, 青铜 2, 磷铜
- 端子规格: D, 90度 Y, 180度 S, SMT贴板
- 塑胶形态: 1=6.2有耳朵 2=6.5有耳朵 3=6.8有耳朵 4=5.7有耳朵 5=6.0有耳朵 6=6.2无耳朵 7=6.5无耳朵 8=6.8无耳朵 9=6.0有耳朵短路 A=6.2无耳朵 2.3短路 B=6.5反向单柱 0.8 C=6.0无耳朵MJ
- 塑胶颜色: 01, 白色 02, 黑色 03, 本色
- 塑胶材质: 1, PBT 2, LCP 3, PA9T 4, PPA 5, PA6T
- 对插方向: A, 正向 B, 反向
- 外壳材质: 1, 铁壳 2, 铜壳
- 插口类型: 1=有边方弹 2=无边方弹 3=有边尖弹 4=无边尖弹 5=无边大小弹
- 外壳脚型: 1, 前两脚 2, 后两脚 3, 四脚 4, 无脚
- 类别: D款10.0系列

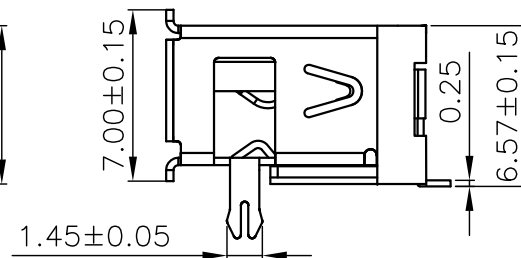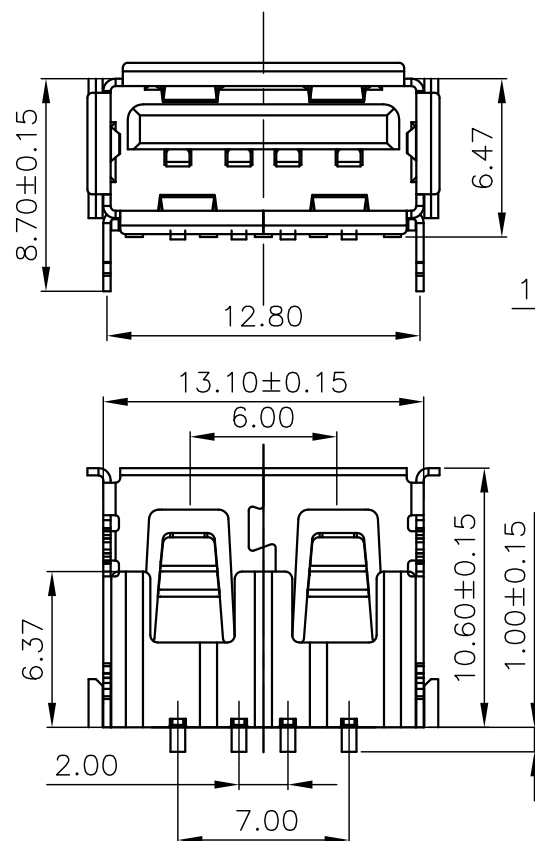

|   |                  |   |  |
|---|------------------|---|--|
| 1 | 912-111A1012S102 | 5 |  |
| 2 |                  | 6 |  |
| 3 |                  | 7 |  |
| 4 |                  | 8 |  |

DRAWN

JH 深圳市精拓金电子有限公司

CHECKED

TITLE

PART NO.


912-112A2022S10100

APPROVED

AF10. 6D款前两脚有边方弹  
铜壳LCP黑胶6.5SMT

DRAWING NO.

R912111A1012S102



UNIT

mm

TOLERANCE

.XXX±.10, .XX±.20, .X±.25, ANG±5°

SCALE

1:1

SHEET

1 OF 1

SIZE

A4

REV.

X1