


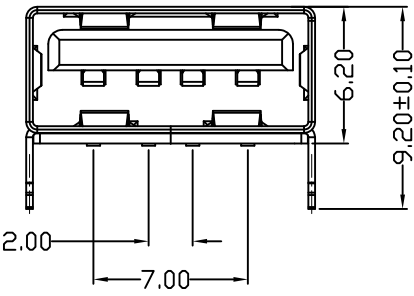
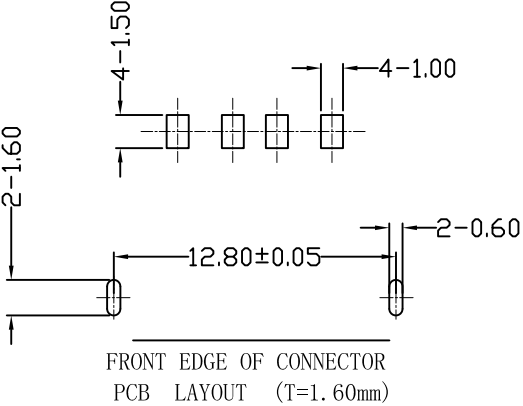


C款，正向10.0两脚，SMT-*6.20

MAPX	MODIFICATION	DATE



NOTES:

- 1. HOUSING: SEE NOTES,
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION:

- 1. ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
- 2. MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
 - 5000 CYCLES MIN
 - 5000 CYCLES EXTRACTION FORCE:3~35N
- 3. ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55℃+85℃
- 4. Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"

产品图 PRODUCT CHART DWG			深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERWISE			单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO	910-161A2026S10200	
		.X	±5.°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NAME	AF10.0C款前两脚无边铁壳LCP	
		.XX	±2.°	日期 DATE	2012.10.15	核准 APPD	角法 VIEW	版本 VER	AD
.XXX	±0.03	.XXX	±0.5°						