
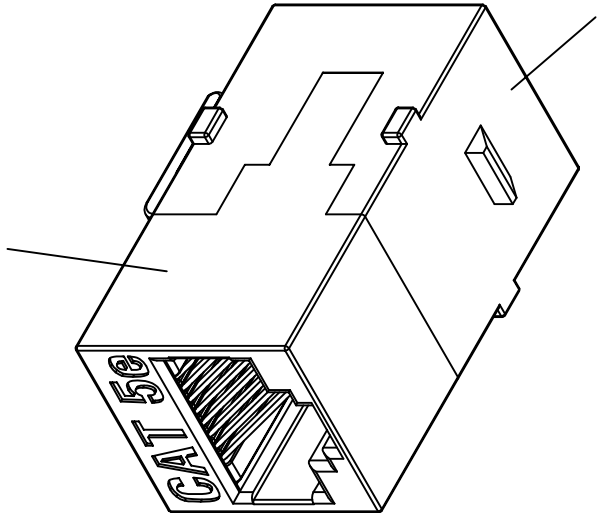








DATE	REV	ECN	APP'D. BY
03/14/18	A0	Released	TM
05/11/18	A1	11245	DG

ISOMETRIC VIEW

JACK HOUSING LEFT

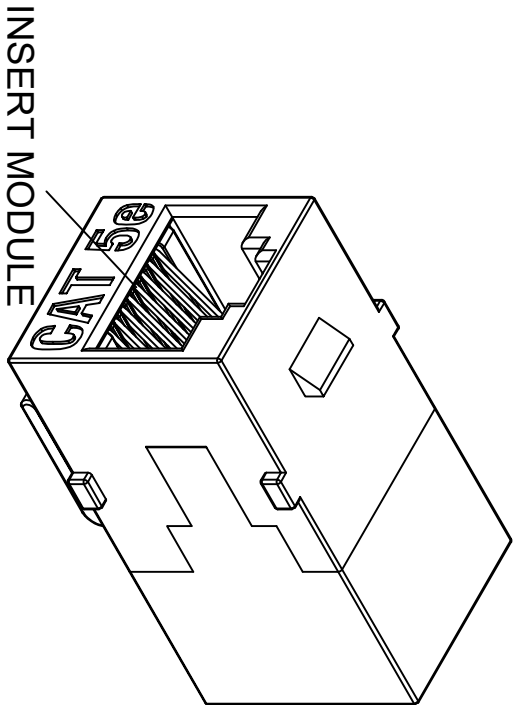

ASSEMBLY DIMENSION

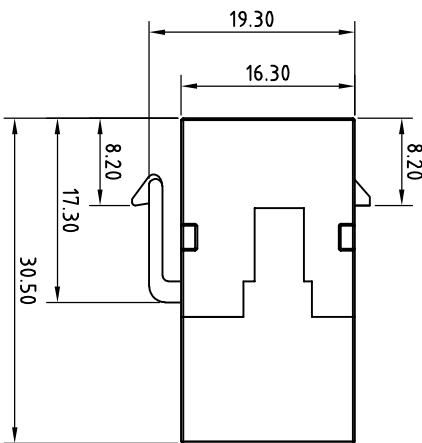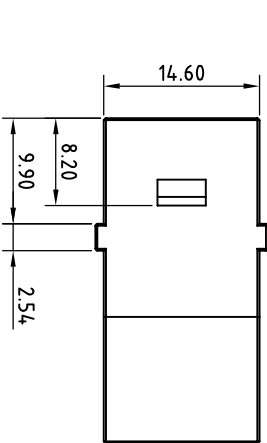

COMPONENTS		
3	INSERT MODULE	2
2	JACK HOUSING LEFT	1
1	JACK HOUSING RIGHT	1
ITEM	PART NAME	Q'TY

Transmission Performance:
Meet Cat 5e Channel performance requirements
specified in TIA-568-C.2

ELECTRICAL

Electrical Insulation Resistance : 500 MΩ
min. @ 100V d.c.
Dielectric Withstanding Voltage : 1000V d.c. or
a.c. Peak Contact to Contact @ 60Hz for 1
minute,

MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic,
UL 94V-0
Spring Wire : Phosphor Bronze Alloy Plated With
50 micro-inch of Gold

SS-82000-004
PART NUMBER

THIRD ANGLE PROJECTION

206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

DO NOT SCALE DRAWING	TITLE:		
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	CAT 5e UNSHIELDED KEYSTONE COUPLER JACK		

DIMENSIONS: METRIC	THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±0.2 ANGLES ARE ± 1°			
SHEET NO. 1 OF 1			

DRN BY: DG	DATE: 03/14/18
APP'D BY: TM	DATE: 03/14/18
DWG NO. CT820017	REV. A1

