



RADIALL


R451953000

TECHNICAL
DATA SHEET

TITLE REMOVABLE CARTRIDGE

LTR. A

DRAWING:

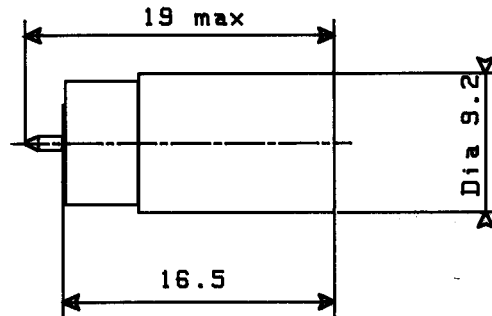

Mounted in a detector case type R 451576500.

General tolerances : ± 0.5 mm

ELECTRICAL CHARACTERISTICS:

FREQUENCY RANGE : .01 - 18 GHz
IMPEDANCE : 50 Ohms
POLARITY : Positive
FREQUENCY RESPONSE:
 (0.01 - 8 GHz) : ± 0.2 dB/Octave
 (0.01 - 12.4 GHz) : ± 0.5 dB
 (0.01 - 18 GHz) : ± 1 dB
V.S.W.R. :
 (0.01 - 8 GHz) : ≤ 1.35
 (8 - 18 GHz) : ≤ 1.50
SENSITIVITY:
 LOW LEVEL (Input power ≤ -20 dbm): > 500 mV/mW
 HIGH LEVEL (Input power ≈ 0.35 mW): > 100 mV
TANGENTIAL SENSITIVITY : - 44 dB mini
SQUARE LAW RESPONSE LIMIT : - 12 dBm
VIDEO IMPEDANCE : 1 k Ω Typical
VIDEO CAPACITY : 20 pF Typical
AVERAGE POWER (CW) : 200 mW Maxi
SCHOTTKY DIODE : <<Zero bias>>

PEN

CAT

QUALITY Dpt App.

MO
8

13 MAY 1992

PAGE

1/1

DATE

11/05/92

NAME

K.LUCIEN

LTR

REVISIONS

DATE

APP.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R451953000