

# EVVOSEMI<sup>®</sup>

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

## Product Specification

|              |             |            |
|--------------|-------------|------------|
| ▶ Domestic   | Part Number | TLP181GB-S |
| ▶ Overseas   | Part Number | TLP181GB-S |
| ▶ Equivalent | Part Number | TLP181GB-S |

EV is the abbreviation of name EVVO

OFFICE MACHINE

PROGRAMMABLE CONTROLLERS





AC/DC-INPUT MODULE

TELECOMMUNICATION

The MINI FLAT COUPLER TLP181 is a small outline coupler, suitable for surface mount assembly.

TLP181 consist of a photo transistor optically coupled to a gallium arsenide infrared emitting diode in a four lead plastic DIP package.

- Collector-Emitter Voltage : 80V (Min.)
- Current Transfer Ratio : 50% (Min.)  
Rank GB : 100% (Min.)
- Isolation Voltage : 3750V<sub>rms</sub> (Min.)
- UL Recognized : UL1577, File No. E492440

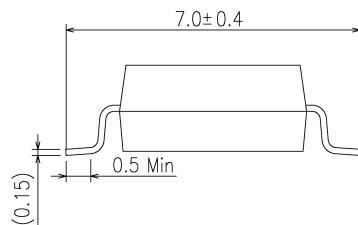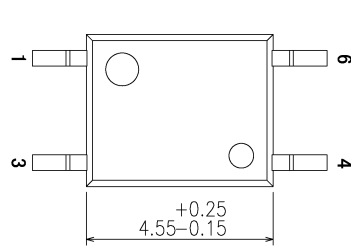

1: Anode  
3: Cathode  
4: Emitter  
6: Collector

## CURRENT TRANSFER RATIO

| TYPE   | CLASSI-<br>FICATION<br><br>*1 | CURRENT TRANSFER RATIO (%)<br>(I <sub>C</sub> / I <sub>F</sub> )<br><br>I <sub>F</sub> = 5mA, V <sub>CE</sub> = 5V, T <sub>a</sub> = 25°C |      | MARKING OF CLASSIFICATION                                             |
|--------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------|
|        |                               | MIN.                                                                                                                                      | MAX. |                                                                       |
|        |                               |                                                                                                                                           |      |                                                                       |
| TLP181 | (None)                        | 50                                                                                                                                        | 600  | BLANK, Y, Y <sup>■</sup> , G, G <sup>■</sup> , B, B <sup>■</sup> , GB |
|        | Rank Y                        | 50                                                                                                                                        | 150  | Y, Y <sup>■</sup>                                                     |
|        | Rank GR                       | 100                                                                                                                                       | 300  | G, G <sup>■</sup>                                                     |
|        | Rank BL                       | 200                                                                                                                                       | 600  | B, B <sup>■</sup>                                                     |
|        | Rank GB                       | 100                                                                                                                                       | 600  | G, G <sup>■</sup> , B, B <sup>■</sup> , GB                            |

\*1 : EX, Rank GB : TLP181GB

## MAXIMUM RATINGS (Ta = 25°C)

| CHARACTERISTIC                                       |                                                               | SYMBOL               | RATING                        | UNIT             |
|------------------------------------------------------|---------------------------------------------------------------|----------------------|-------------------------------|------------------|
| ED                                                   | Forward Current                                               | I <sub>F</sub>       | 50                            | mA               |
|                                                      | Forward Current Detating                                      | ΔI <sub>F</sub> / °C | −0.7 (Ta ≥ 53°C)              | mA / °C          |
|                                                      | Pulse Forward Current                                         | I <sub>FP</sub>      | 1 (100μs pulse, 100pps)       | A                |
|                                                      | Reverse Voltage                                               | V <sub>R</sub>       | 5                             | V                |
|                                                      | Junction Temperature                                          | T <sub>j</sub>       | 125                           | °C               |
| DETECTOR                                             | Collector-Emitter Voltage                                     | V <sub>CEO</sub>     | 80                            | V                |
|                                                      | Emitter-Collector Voltage                                     | V <sub>ECO</sub>     | 7                             | V                |
|                                                      | Collector Current                                             | I <sub>C</sub>       | 50                            | mA               |
|                                                      | Collector Power Dissipation (1 Circuit)                       | P <sub>C</sub>       | 150                           | mW               |
|                                                      | Collector Power Dissipation Derating<br>(1 Circuit Ta ≥ 25°C) | ΔP <sub>C</sub> / °C | −1.5                          | mW / °C          |
|                                                      | Junction Temperature                                          | T <sub>j</sub>       | 125                           | °C               |
| Storage Temperature Range                            |                                                               | T <sub>stg</sub>     | −55~125                       | °C               |
| Operating Temperature Range                          |                                                               | T <sub>opr</sub>     | −55~100                       | °C               |
| Lead Soldering Temperature                           |                                                               | T <sub>sol</sub>     | 260 (10s)                     | °C               |
| Total Package Power Dissipation                      |                                                               | P <sub>T</sub>       | 200                           | mW               |
| Total Package Power Dissipation Derating (Ta ≥ 25°C) |                                                               | ΔP <sub>T</sub> / °C | −2.0                          | mW / °C          |
| Isolation Voltage (Note 1)                           |                                                               | BV <sub>S</sub>      | 3750<br>(AC, 1min., RH ≤ 60%) | V <sub>rms</sub> |

Note 1 Device considered a two-terminal device : Pin 1, 3 shorted together and pins 4, 6 shorted together

## INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC |                                     | SYMBOL        | TEST CONDITION                                                                    | MIN. | TYP.     | MAX.     | UNIT          |
|----------------|-------------------------------------|---------------|-----------------------------------------------------------------------------------|------|----------|----------|---------------|
| LED            | Forward Voltage                     | $V_F$         | $I_F = 10\text{mA}$                                                               | 1.0  | 1.15     | 1.3      | V             |
|                | Reverse Current                     | $I_R$         | $V_R = 5\text{V}$                                                                 | —    | —        | 10       | $\mu\text{A}$ |
|                | Capacitance                         | $C_T$         | $V = 0, f = 1\text{MHz}$                                                          | —    | 30       | —        | pF            |
| DETECTOR       | Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | $I_C = 0.5\text{mA}$                                                              | 80   | —        | —        | V             |
|                | Emitter-Collector Breakdown Voltage | $V_{(BR)ECO}$ | $I_E = 0.1\text{mA}$                                                              | 7    | —        | —        | V             |
|                | Collector Dark Current              | $I_{CEO}$     | $V_{CE} = 48\text{V}$ , (Ambient Light Below 1000 lx )                            | —    | 0.01 (2) | 0.1 (10) | $\mu\text{A}$ |
|                |                                     |               | $V_{CE} = 48\text{V}$ , $T_a = 85^\circ\text{C}$ , (Ambient Light Below 1000 lx ) | —    | 2 (4)    | 50 (50)  | $\mu\text{A}$ |
|                | Capacitance (Collector to Emitter)  | $C_{CE}$      | $V = 0, f = 1\text{MHz}$                                                          | —    | 10       | —        | pF            |

## COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC                       | SYMBOL                   | TEST CONDITION                                         | MIN. | TYP. | MAX. | UNIT          |
|--------------------------------------|--------------------------|--------------------------------------------------------|------|------|------|---------------|
| Current Transfer Ratio               | $I_C / I_F$              | $I_F = 5\text{mA}$ , $V_{CE} = 5\text{V}$<br>Rank GB   | 50   | —    | 600  | %             |
|                                      |                          |                                                        | 100  | —    | 600  |               |
| Saturated CTR                        | $I_C / I_F (\text{sat})$ | $I_F = 1\text{mA}$ , $V_{CE} = 0.4\text{V}$<br>Rank GB | —    | 60   | —    | %             |
|                                      |                          |                                                        | 30   | —    | —    |               |
| Collector-Emitter Saturation Voltage | $V_{CE} (\text{sat})$    | $I_C = 2.4\text{mA}$ , $I_F = 8\text{mA}$              | —    | —    | 0.4  | V             |
|                                      |                          | $I_C = 0.2\text{mA}$ , $I_F = 1\text{mA}$              | —    | 0.2  | —    |               |
|                                      |                          | Rank GB                                                | —    | —    | 0.4  |               |
| Off-State Collector Current          | $I_C (\text{off})$       | $V_F = 0.7\text{V}$ , $V_{CE} = 48\text{V}$            | —    | 1    | 10   | $\mu\text{A}$ |

## ISOLATION CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC                | SYMBOL | TEST CONDITION                        | MIN.               | TYP.      | MAX. | UNIT             |
|-------------------------------|--------|---------------------------------------|--------------------|-----------|------|------------------|
| Capacitance (Input to Output) | $C_S$  | $V_S = 0\text{V}$ , $f = 1\text{MHz}$ | —                  | 0.8       | —    | pF               |
| Isolation Resistance          | $R_S$  | $V_S = 500\text{V}$                   | $5 \times 10^{10}$ | $10^{14}$ | —    | $\Omega$         |
| Isolation Voltage             | $BV_S$ | AC, 1 minute                          | 3750               | —         | —    | $V_{\text{rms}}$ |
|                               |        | AC, 1 second, in oil                  | —                  | 10000     | —    |                  |
|                               |        | DC, 1 minute, in oil                  | —                  | 10000     | —    | $V_{\text{dc}}$  |



## SWITCHING CHARACTERISTICS (Ta = 25°C)







| CHARACTERISTIC | SYMBOL    | TEST CONDITION                                          | MIN. | TYP. | MAX. | UNIT    |
|----------------|-----------|---------------------------------------------------------|------|------|------|---------|
| Rise Time      | $t_r$     | $V_{CC} = 10V, I_C = 2mA$<br>$R_L = 100\Omega$          | —    | 2    | —    | $\mu s$ |
| Fall Time      | $t_f$     |                                                         | —    | 3    | —    |         |
| Turn-on Time   | $t_{on}$  |                                                         | —    | 3    | —    |         |
| Turn-off Time  | $t_{off}$ |                                                         | —    | 3    | —    |         |
| Turn-on Time   | $t_{ON}$  | $R_L = 1.9k\Omega$ (Fig.1)<br>$V_{CC} = 5V, I_F = 16mA$ | —    | 2    | —    | $\mu s$ |
| Storage Time   | $t_s$     |                                                         | —    | 25   | —    |         |
| Turn-off Time  | $t_{OFF}$ |                                                         | —    | 40   | —    |         |






## RECOMMENDED OPERATING CONDITIONS





| CHARACTERISTIC        | SYMBOL    | MIN. | TYP. | MAX. | UNIT |
|-----------------------|-----------|------|------|------|------|
| Supply Voltage        | $V_{CC}$  | —    | 5    | 48   | V    |
| Forward Current       | $I_F$     | —    | 16   | 20   | mA   |
| Collector Current     | $I_C$     | —    | 1    | 10   | mA   |
| Operating Temperature | $T_{opr}$ | -25  | —    | 85   | °C   |

Fig.1 SWITCHING TIME TEST CIRCUIT

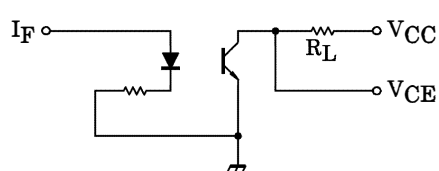

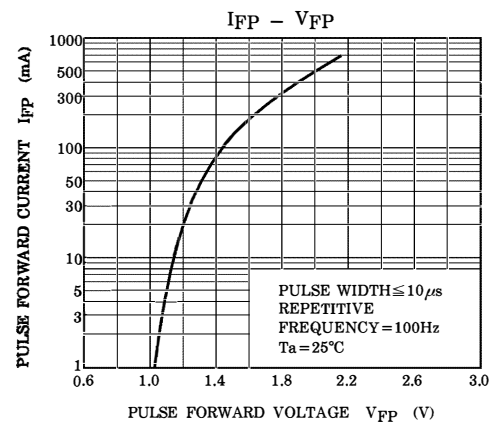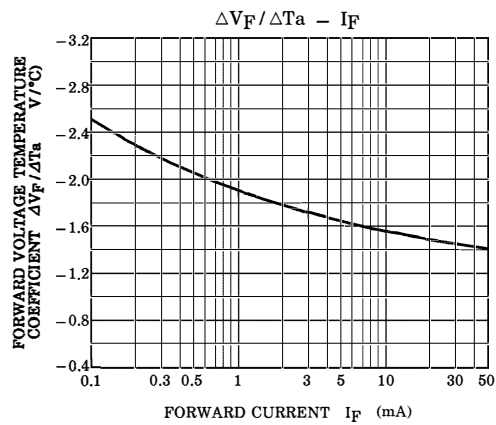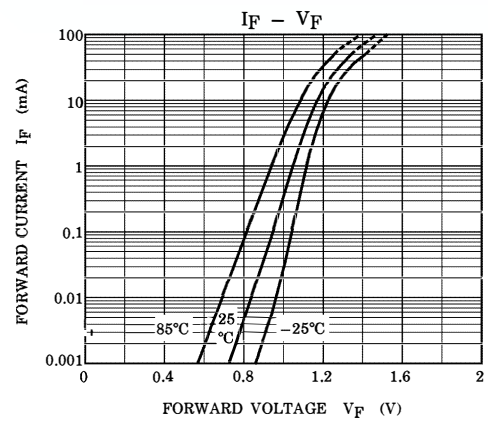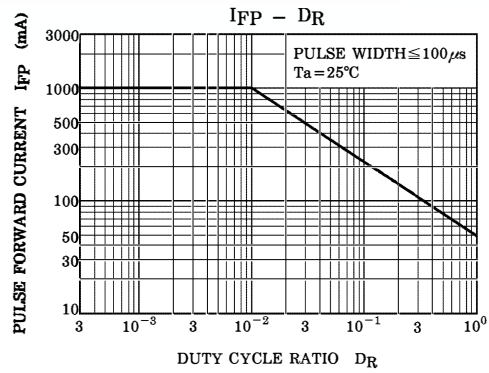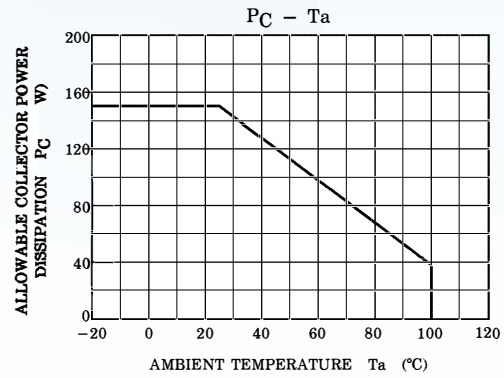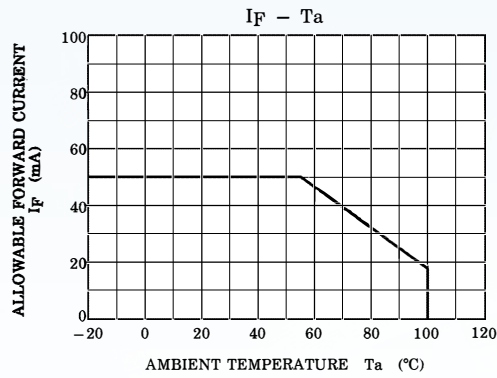

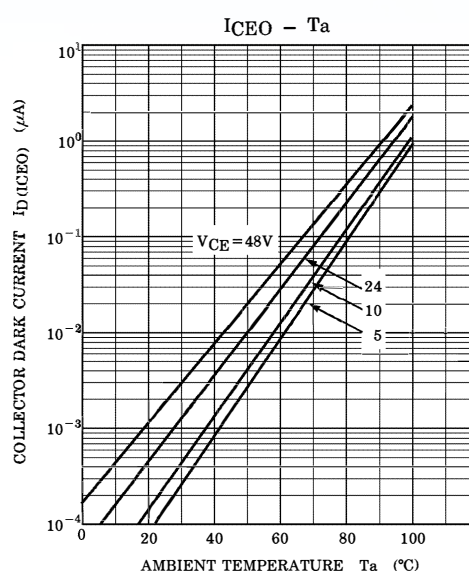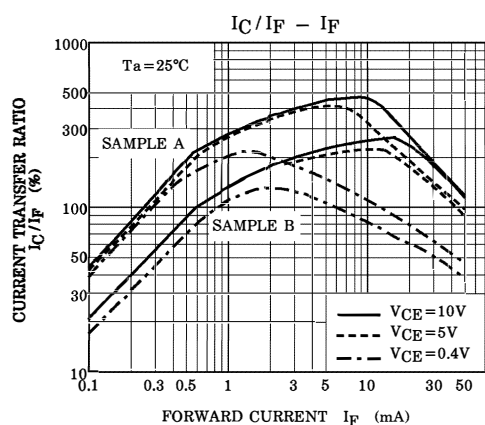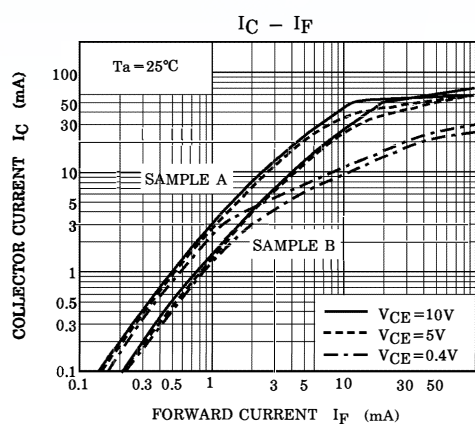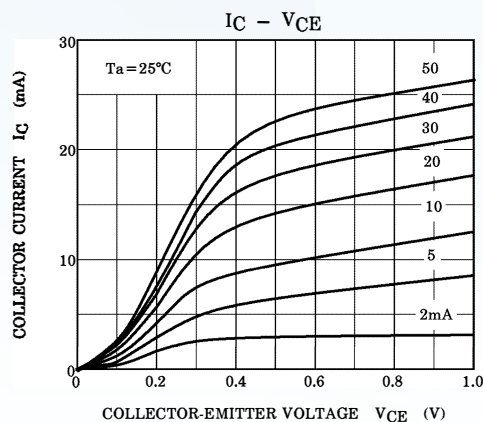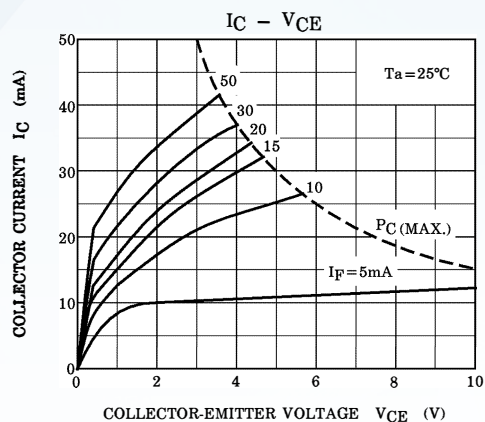

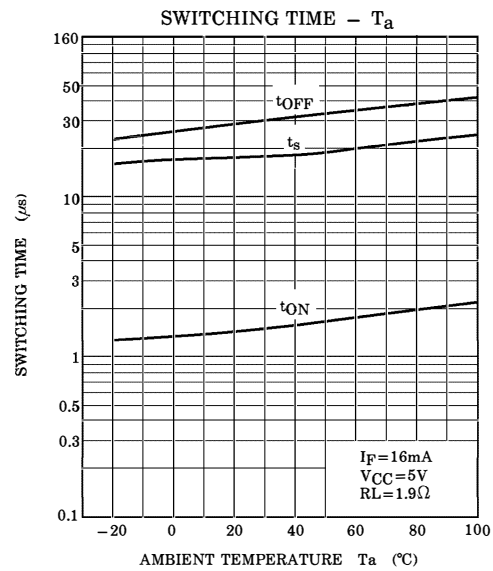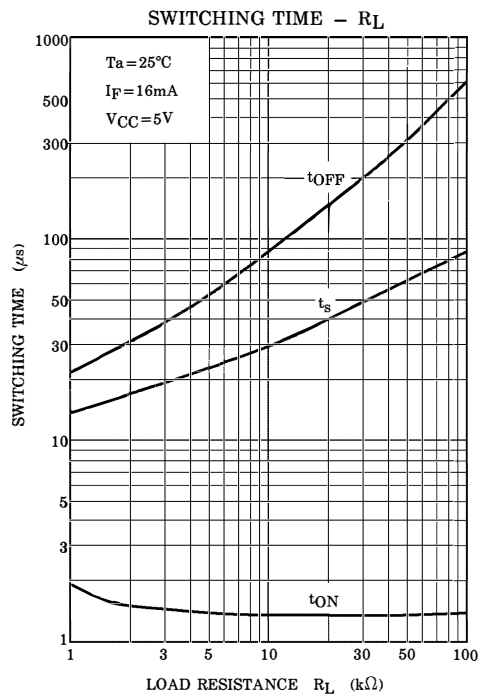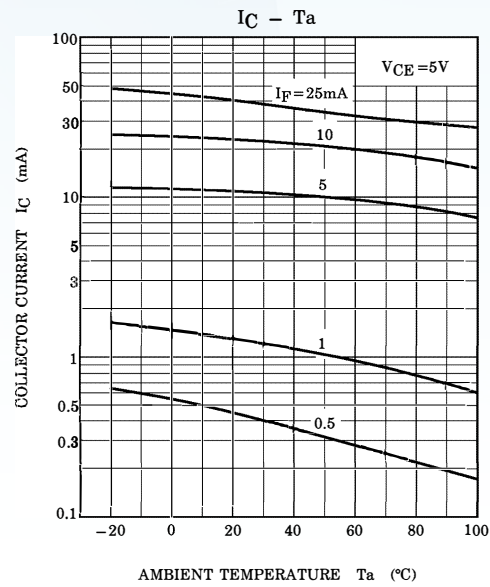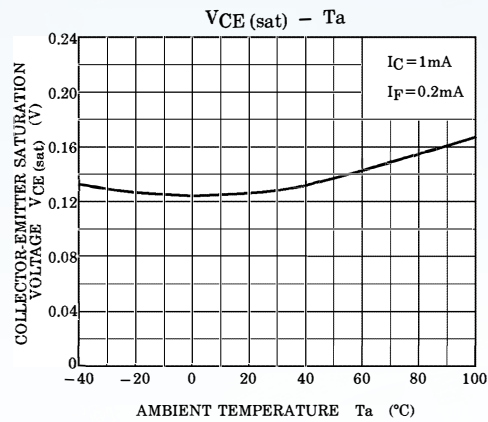

## Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.