

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	SN74LVC1G04
▶ Overseas	Part Number	SN74LVC1G04
▶ Equivalent	Part Number	SN74LVC1G04

EV is the abbreviation of name EVVO

Product introduction

SN74LVC1G04 is a non gate integrated circuit, which can realize the mathematical logic operation of Y=A. It is designed with advanced CMOS technology, which has the characteristics of low power consumption and high output driving ability. The chip can work normally when the voltage of VCC is between 1.65v and 5.5V. And 74lvc1g04 has a variety of small package shapes, which can be widely used in high-end precision instruments, miniaturized low-power handheld devices, and artificial intelligence and other fields.


Product features

- Low input current: typical value 0.1uA
- Low static power consumption: typical value 0.1uA
- High output: VCC=4.5V, greater than 32MA
- Wide operating voltage range: 1.65v to 5.5V
- Package form: DBV/DCK/DRL/YZP/ DRY/DSF/ DPW

Product use

- Portable audio interface
- digital television
- Wireless headset, smart watch, etc
- Blu ray player and home theater
- Solid state drive
- Intelligent wearable devices

Package form and pin function definition

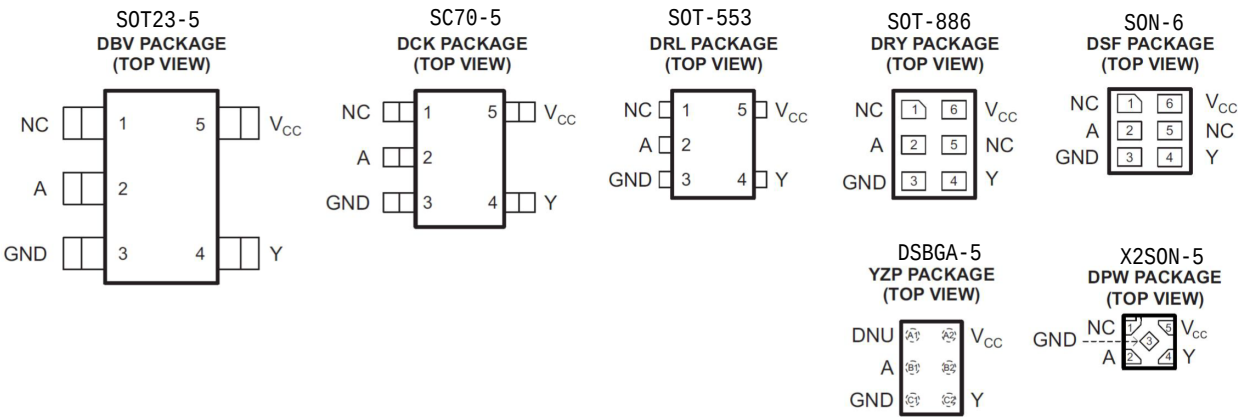

	Pin				
name	DBV/DCK/DRL	DRY/DSF	YZP	DPW	explain
NC	1	1, 5	A1, B2	1	Empty feet
A	2	2	B1	2	input
GND	3	3	C1	3	Power ground
Y	4	4	C2	4	output
VCC	5	6	A2	5	Power supply positive

Note: NC-- Empty feet, no internal connection line

Limit parameter

parameter	Symbol	Limit value	Company
working voltage	V_{cc}	6.5	V
input	V_{in}	-0.5~6.5	V
Output voltage (1)	V_{out}	-0.5~6.5	V
Single pin output current	I_{out}	25	mA
VCC or GND current	I_{cc}	50	mA
Storage temperature	T_s	-65~150	°C
Pin welding temperature	T_w	260, 10s	°C
working temperature	T_a	-40~105	°C

Note: 1. When VCC = 0V, the limit voltage that the output can withstand

2. The limit value of any parameter can not be exceeded. If the limit value is exceeded, it may cause physical damage such as product deterioration; At the same time, the chip can not be guaranteed to work normally when it is close to the limit parameters.

Principle logic diagram



truth table

Inputs	Output
A	Y
L	H
H	L

Working conditions

project	Symbol	Test conditions	minimum value	Typical value	Maximum	Company
working voltage	V_{cc}	—	1.65	—	5.5	V
Input high level voltage	V_{IH}	$V_{cc}=1.65V\sim1.95V$	$0.65*V_{cc}$	—	—	V
		$V_{cc}=2.3V\sim2.7V$	1.7V	—	—	
		$V_{cc}=3V\sim5.5V$	$0.7*V_{cc}$	—	—	
Low-Level Input Voltage	V_{IL}	$V_{cc}=1.65V\sim1.95V$	—	—	$0.35*V_{cc}$	V
		$V_{cc}=2.3V\sim2.7V$	—	—	0.7	
		$V_{cc}=3V\sim5.5V$	—	—	$0.3*V_{cc}$	
input voltage	V_I	—	0	—	5.5	V
output voltage	V_O	—	0	—	V_{cc}	V
High level output current	I_{OH}	$V_{cc}=1.65V$	—	—	-4	mA
		$V_{cc}=2.3V$	—	—	-8	
		$V_{cc}=3V$	—	—	-16	
		$V_{cc}=4.5V$	—	—	-32	
Low level output current	I_{OL}	$V_{cc}=1.65V$	—	—	4	mA
		$V_{cc}=2.3V$	—	—	8	
		$V_{cc}=3V$	—	—	16	
		$V_{cc}=4.5V$	—	—	32	


■ electrical properties

DC electrical characteristics: T_i=25℃

project	Symbol		Test conditions	V _{CC}	Typical value	Maximum	Company
High level load voltage	V _{OH}		I _{OH} = -100uA	1.65V~5.5V	1.64	-	V
			I _{OH} = -4 mA	1.65V	1.47	-	
			I _{OH} = -8 mA	2.3V	2.15	-	
			I _{OH} = -16 mA	3V	2.73	-	
			I _{OH} = -32 mA	4.5V	4.0	-	
Low level load voltage	V _{OL}		I _{OH} = 100uA	1.65V~5.5V	0.01	-	V
			I _{OH} = 4 mA	1.65V	0.11	-	
			I _{OH} = 8 mA	2.3V	0.11	-	
			I _{OH} = 16 mA	3V	0.2	-	
			I _{OH} = 32 mA	4.5V	0.35	-	
Input current	I _I	A	V _I = 5.5V or GND	0~5.5V	0.01	±5	uA
Turn off current	I _{OFF}	V _I	V _I = 5.5V	0	0.01	±10	uA
		V _O	V _O = 5.5V	0	0.01	±10	
Working current	I _{CC}		V _I = 5.5V, I _O = 0	1.65V~5.5V	0.01	10	uA
			V _I = GND, I _O = 0		0.01	10	
Working current variation	ΔI _{CC}		A = V _{CC} - 0.6V	3V~5.5V	25	-	uA

AC electrical characteristics: T_A = 25 ℃ V_{CC} = 5.0V, T_R ≤ 20ns, see test method.

project	Symbol	Test conditions	minimum value	Typical value	Maximum	Company
Maximum transmission delay time a, B to y	t _{DLH}	C _L = 15pF	-	10	-	ns
	t _{PLH}	C _L = 15pF	-	10	-	ns

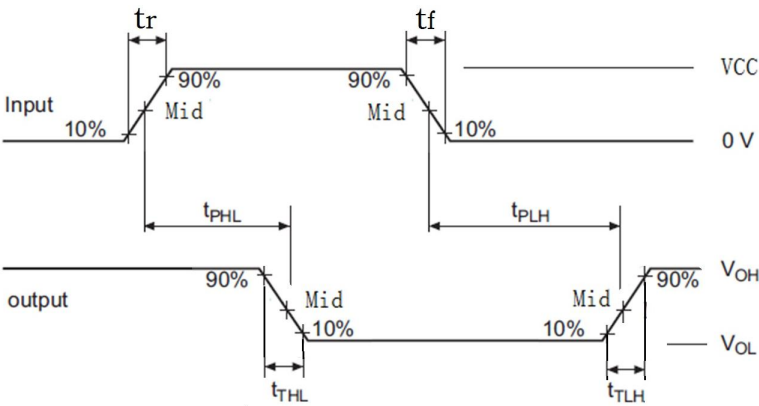


Note: 1. CL capacitor is an external chip capacitor (0603), which is connected close to the output pin, and the capacitance ground is close to the chip GND; 2. Input: port input level, f = 500KHz, d = 50%; tr = tf ≤ 20ns; 3. Output: y-end output test.


■ Encapsulation information

Unit: mm / in


DBV (SOT23-5)

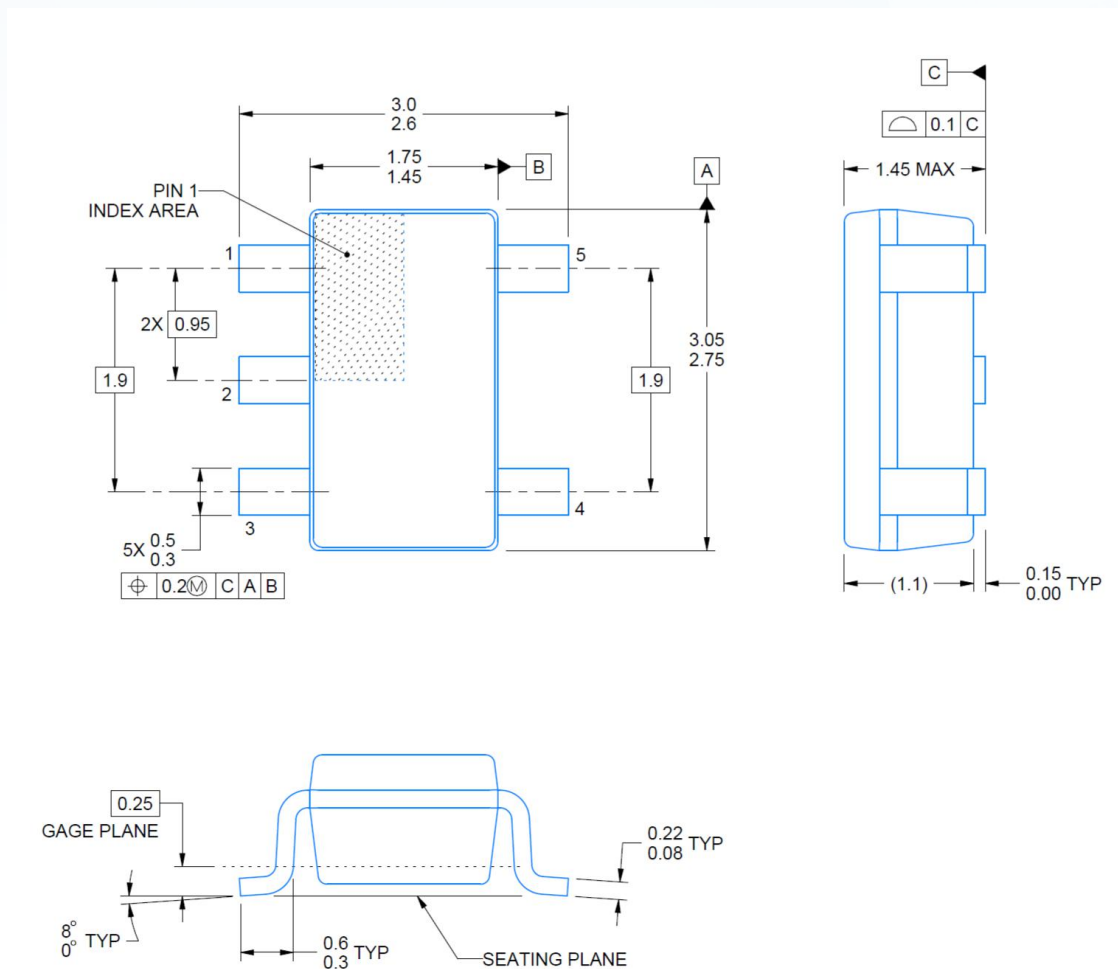


■ Marking




DCK (SC70-5)

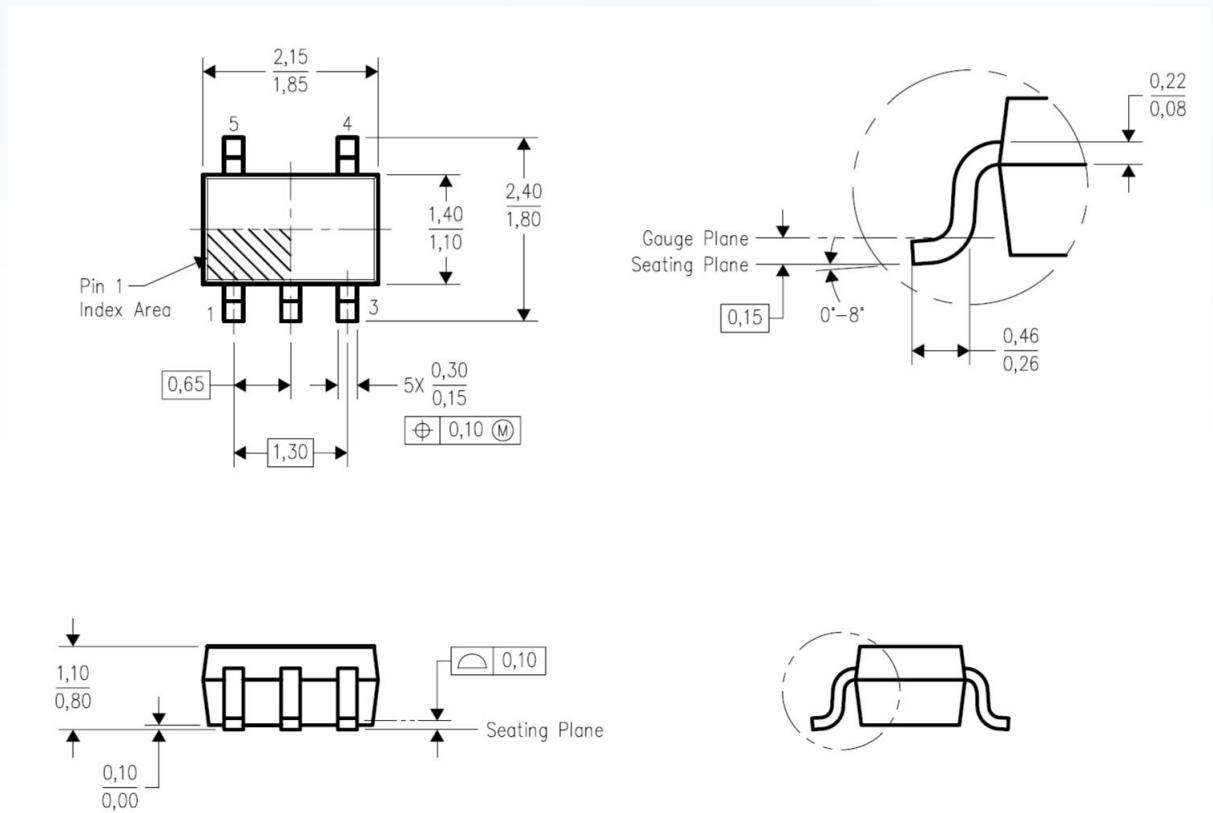





■ Marking




DRL (S0T-553)

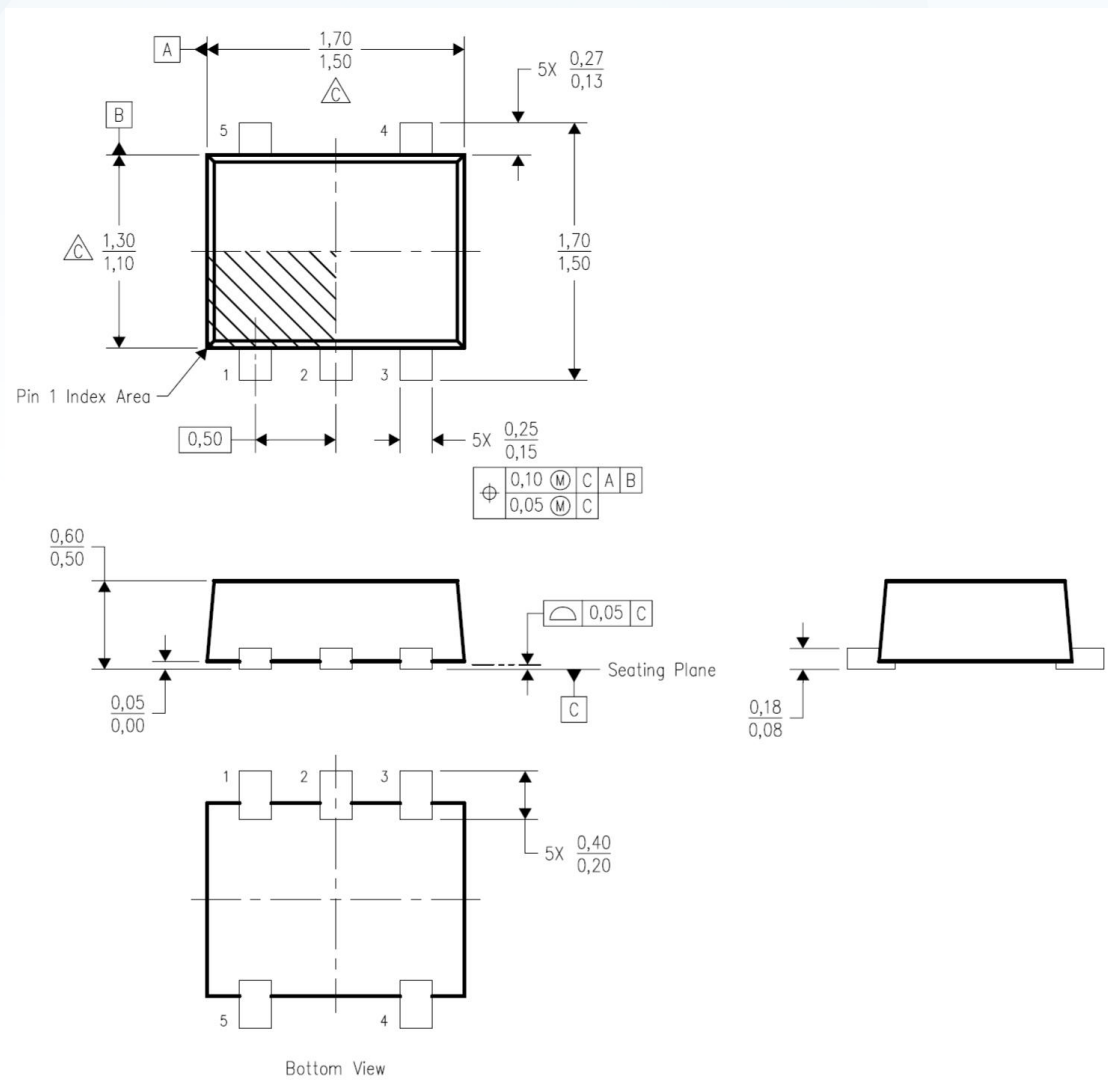


DRY (SOT-886)

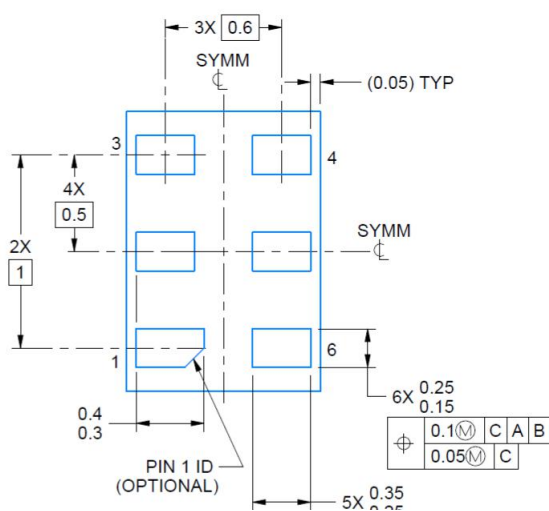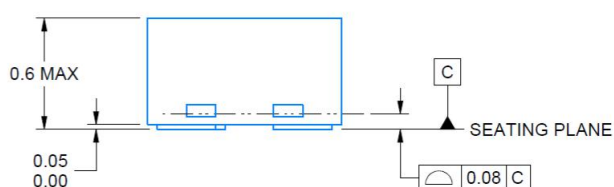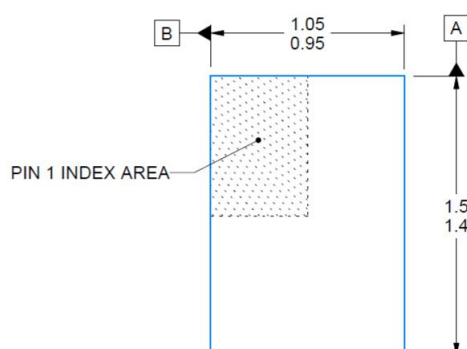



DSF (SON-6)

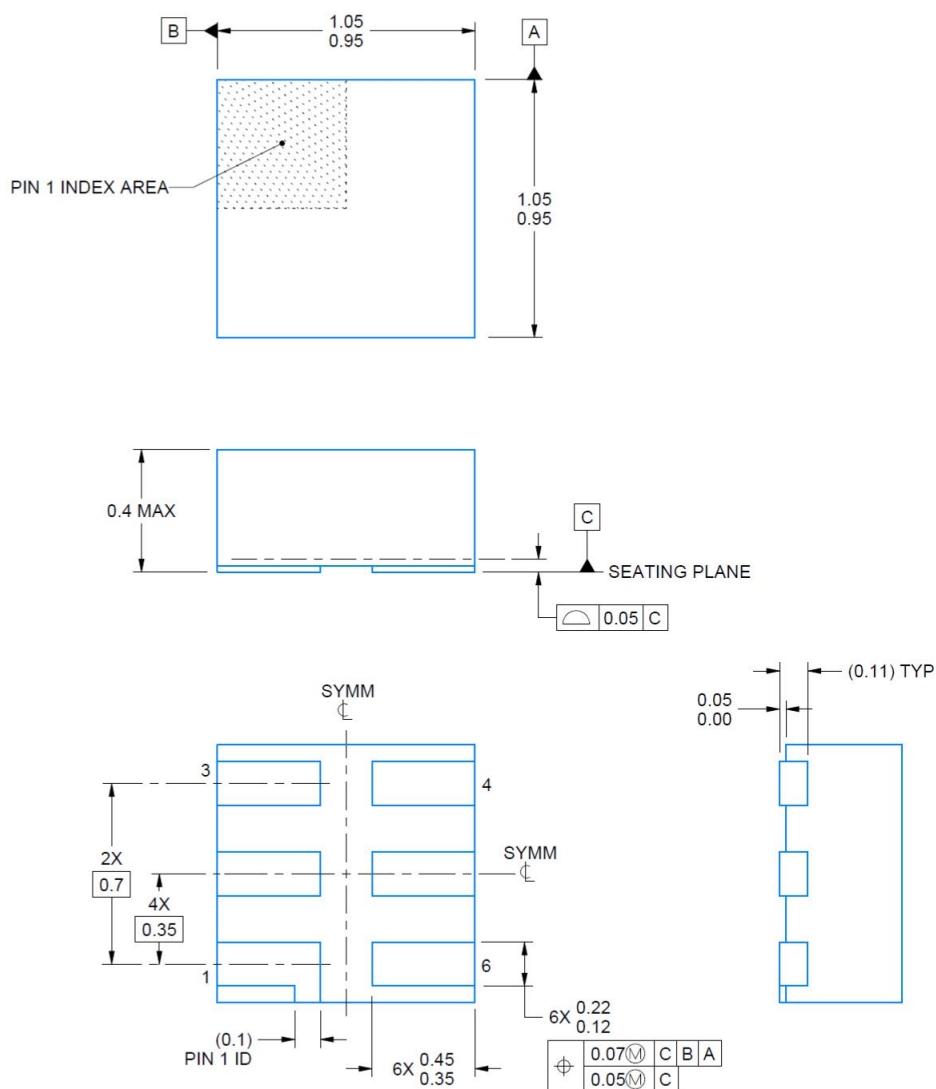


YZP (DSBGA-5)

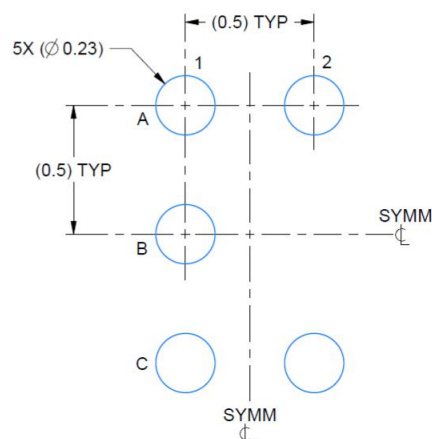

LAND PATTERN EXAMPLE
SCALE:40X

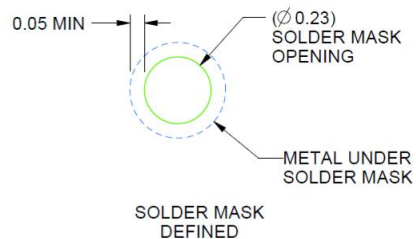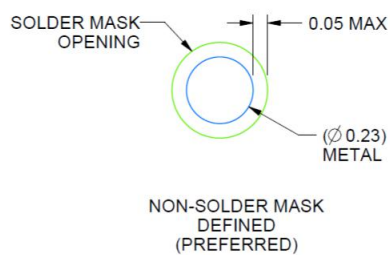

DPW (X2SON-5)

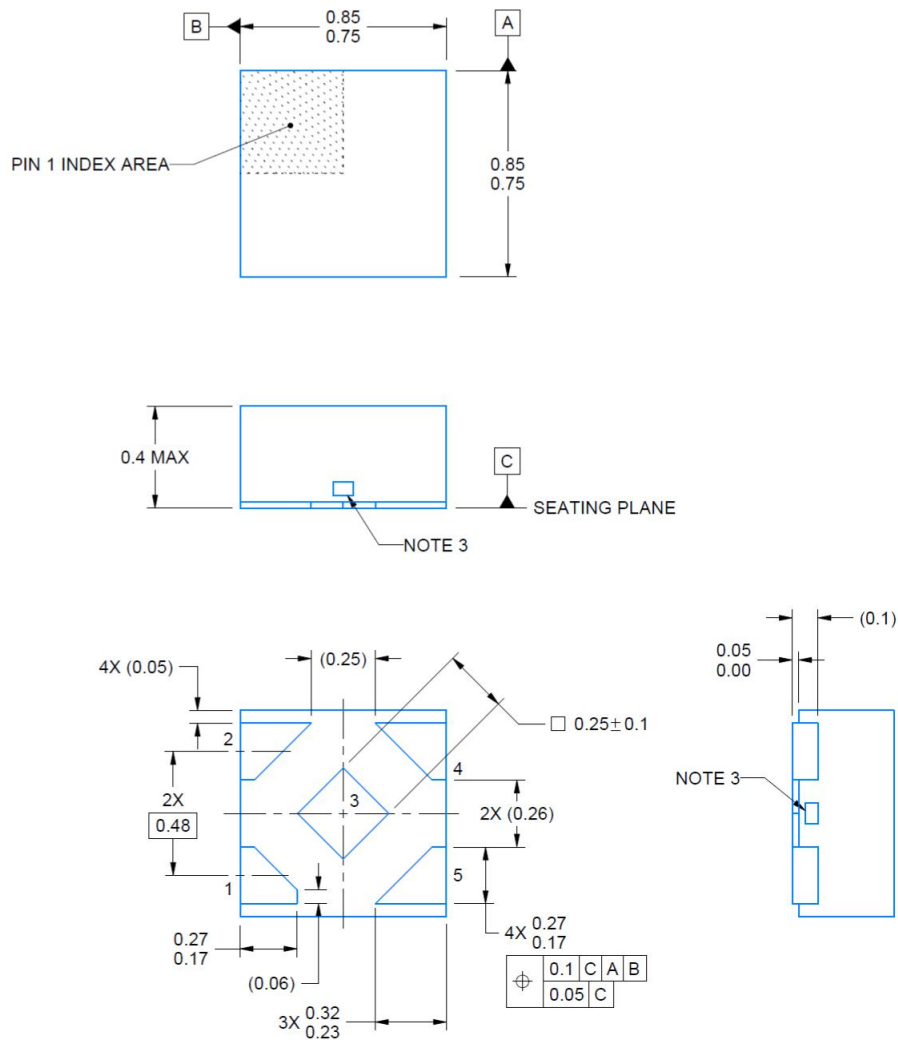

Ordering information

Order code	Package	Baseqty	Deliverymode
SN74LVC1G04DBVR	SOT23-5	3000	Tape and reel
SN74LVC1G04DCKR	SC70-5	3000	Tape and reel
SN74LVC1G04DSFR	SON-6	5000	Tape and reel
SN74LVC1G04DRYR	SOT-886	5000	Tape and reel
SN74LVC1G04YZPR	DSBGA-5	3000	Tape and reel
SN74LVC1G04DPWR	X2SON-5	3000	Tape and reel
SN74LVC1G04DRLR	SOT-553	4000	Tape and reel

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.