

由 Autodesk 教育版产品制作

E

F

1

2

4

5






1

2

3

5

6

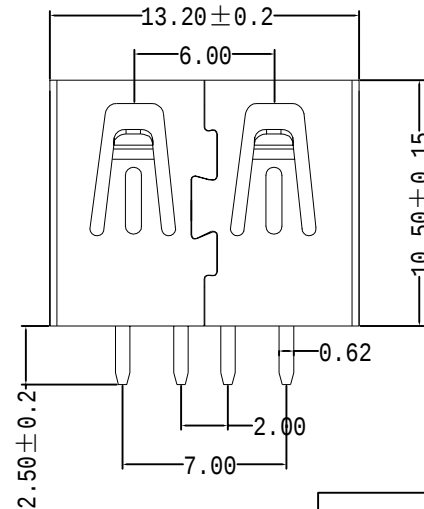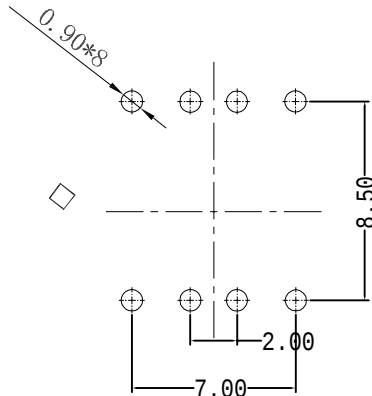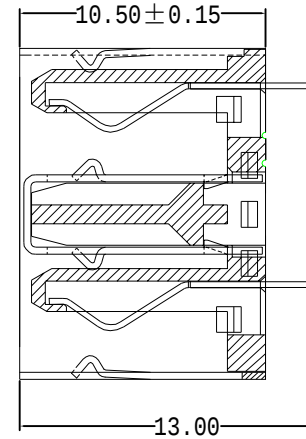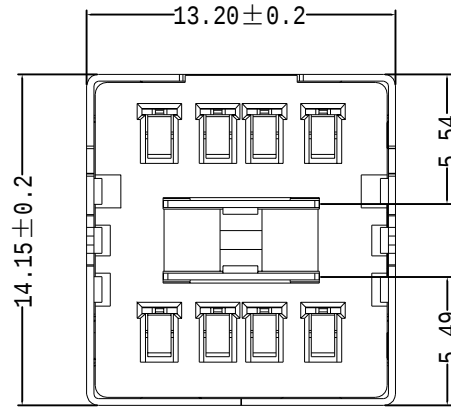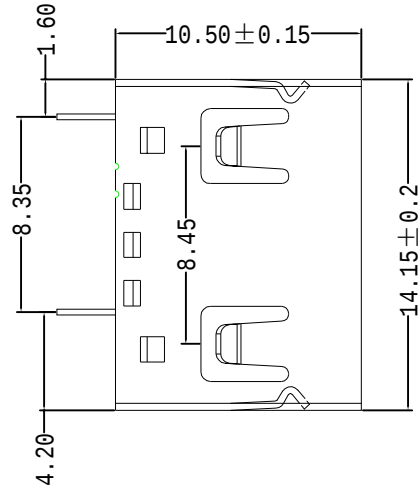

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触阻抗:Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectnc Withstanding Voitage:
500 V AC AT Sea Levol
- 5.绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力: Cnncetor Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力: Terminal Retenion
1.2kgf(MIN)

原材料:Material:

- 1.塑胶:Housing:
ABS PBT WHITE/BLACK
- 2.外壳:Shell:SPCC
Nickel Plating
- 2.端子:Contact:Copper Alloy C2680

电镀:Finish:

- 1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls

深圳市万骏达电子有限公司

品名 (ITEM NO)

USB AF 双层180度短体无边10.5

料号 (PART NO)

2USB2.0-AF-ZC-10.5-ZB

模号 (MODEL NO)

图号 (DWG NO)

版本 (REV)

日期 (DATE)

设计 (DESIGN)

审核 (CHECKED)

核准 (APPROVED)

单位(UNIT): MM

比例(SCALE)1:1

未注公差

TOLERANCE UNSPECIFIED

X.X ±0.30

X.XXX ±0.20

X° ±0.10

X° ±5°

X.X° ±2°

由 Autodesk 教育版产品制作

E

F