

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- . - .

© COPYRIGHT - By TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

D


PN. OBSOLETE

ECO-12-004810


24-APR-12

BLJ


BH,Y

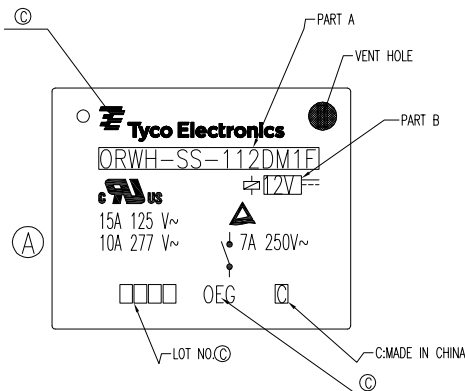

CIRCUIT DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM (BOTTOM VIEW)



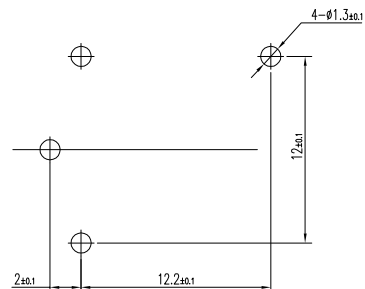


①

STATUS	TE PART NO	DESCRIPTION	PART B	PART A	ITEM
OBSOLETE	1721153-1	ORWH-SS-103DM1F, 000	3V	ORWH-SS-103DM1F	A
OBSOLETE	1721153-2	ORWH-SS-105DM1F, 000	5V	ORWH-SS-105DM1F	B
ACTIVE	1721153-3	ORWH-SS-106DM1F, 000	6V	ORWH-SS-106DM1F	C
OBSOLETE	1721153-4	ORWH-SS-109DM1F, 000	9V	ORWH-SS-109DM1F	D
ACTIVE	1721153-5	ORWH-SS-112DM1F, 000	12V	ORWH-SS-112DM1F	E
OBSOLETE	1721153-6	ORWH-SS-118DM1F, 000	18V	ORWH-SS-118DM1F	F
ACTIVE	1721153-7	ORWH-SS-124DM1F, 000	24V	ORWH-SS-124DM1F	G
OBSOLETE	1721153-8	ORWH-SS-148DM1F, 000	48V	ORWH-SS-148DM1F	H
OBSOLETE	1721153-9	ORWH-SH-103DM1F, 000	3V	ORWH-SH-103DM1F	I
OBSOLETE	1-1721153-0	ORWH-SH-105DM1F, 000	5V	ORWH-SH-105DM1F	J
OBSOLETE	1-1721153-1	ORWH-SH-106DM1F, 000	6V	ORWH-SH-106DM1F	K
ACTIVE	1-1721153-2	ORWH-SH-109DM1F, 000	9V	ORWH-SH-109DM1F	L
ACTIVE	1-1721153-3	ORWH-SH-112DM1F, 000	12V	ORWH-SH-112DM1F	M
OBSOLETE	1-1721153-4	ORWH-SH-118DM1F, 000	18V	ORWH-SH-118DM1F	N
ACTIVE	1-1721153-5	ORWH-SH-124DM1F, 000	24V	ORWH-SH-124DM1F	O
ACTIVE	1-1721153-6	ORWH-SH-148DM1F, 000	48V	ORWH-SH-148DM1F	P

NOTE


① LOT NO. SYSTEM AS FOLLOWING:

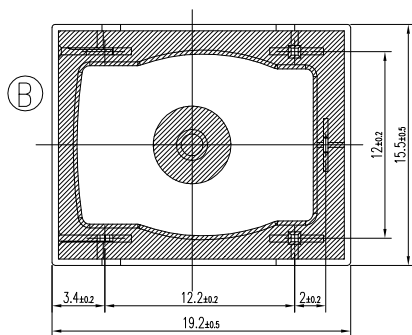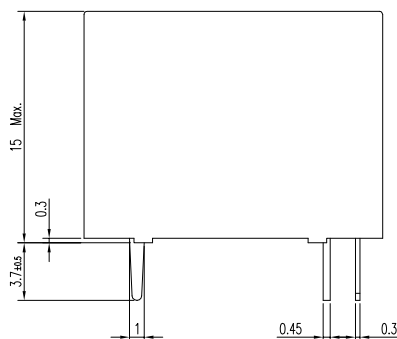

GENERAL TOLERANCE

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

FINISH

DWN

XN.ZHANG

CHK

WAYNE.PENG

APVD

MJ.HO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

		UV RESIN	UV SEAL(FOR SH)	13
		EPOXY RESIN	SEAL	12
CLASS 155 F		MW79	MAGNETIC WIRE	11
		HCP	COIL TERMINAL	10
UL94 V-0		PBT	BOBBIN	9
UL94 V-0		PBT	CASE	8
		Ag ALLOY	STATIONARY CONTACT	7
		Ag ALLOY	MOVABLE CONTACT	6
		Cu ALLOY	MOVABLE SPRING	5
		Cu ALLOY	NO TERMINAL	4
		Cu PLATED STEEL	CORE	3
		Cu PLATED STEEL	ARMATURE FORM A	2
		Ni PLATED STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

TE

TE Connectivity

NAME

ORWH-1M CD FREE CUSTOMER DRAWING

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C=1721153

SCALE

3:1

SHEET

1 OF 1

REV

D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[ORWH-SH-124DM1F,000](#)