

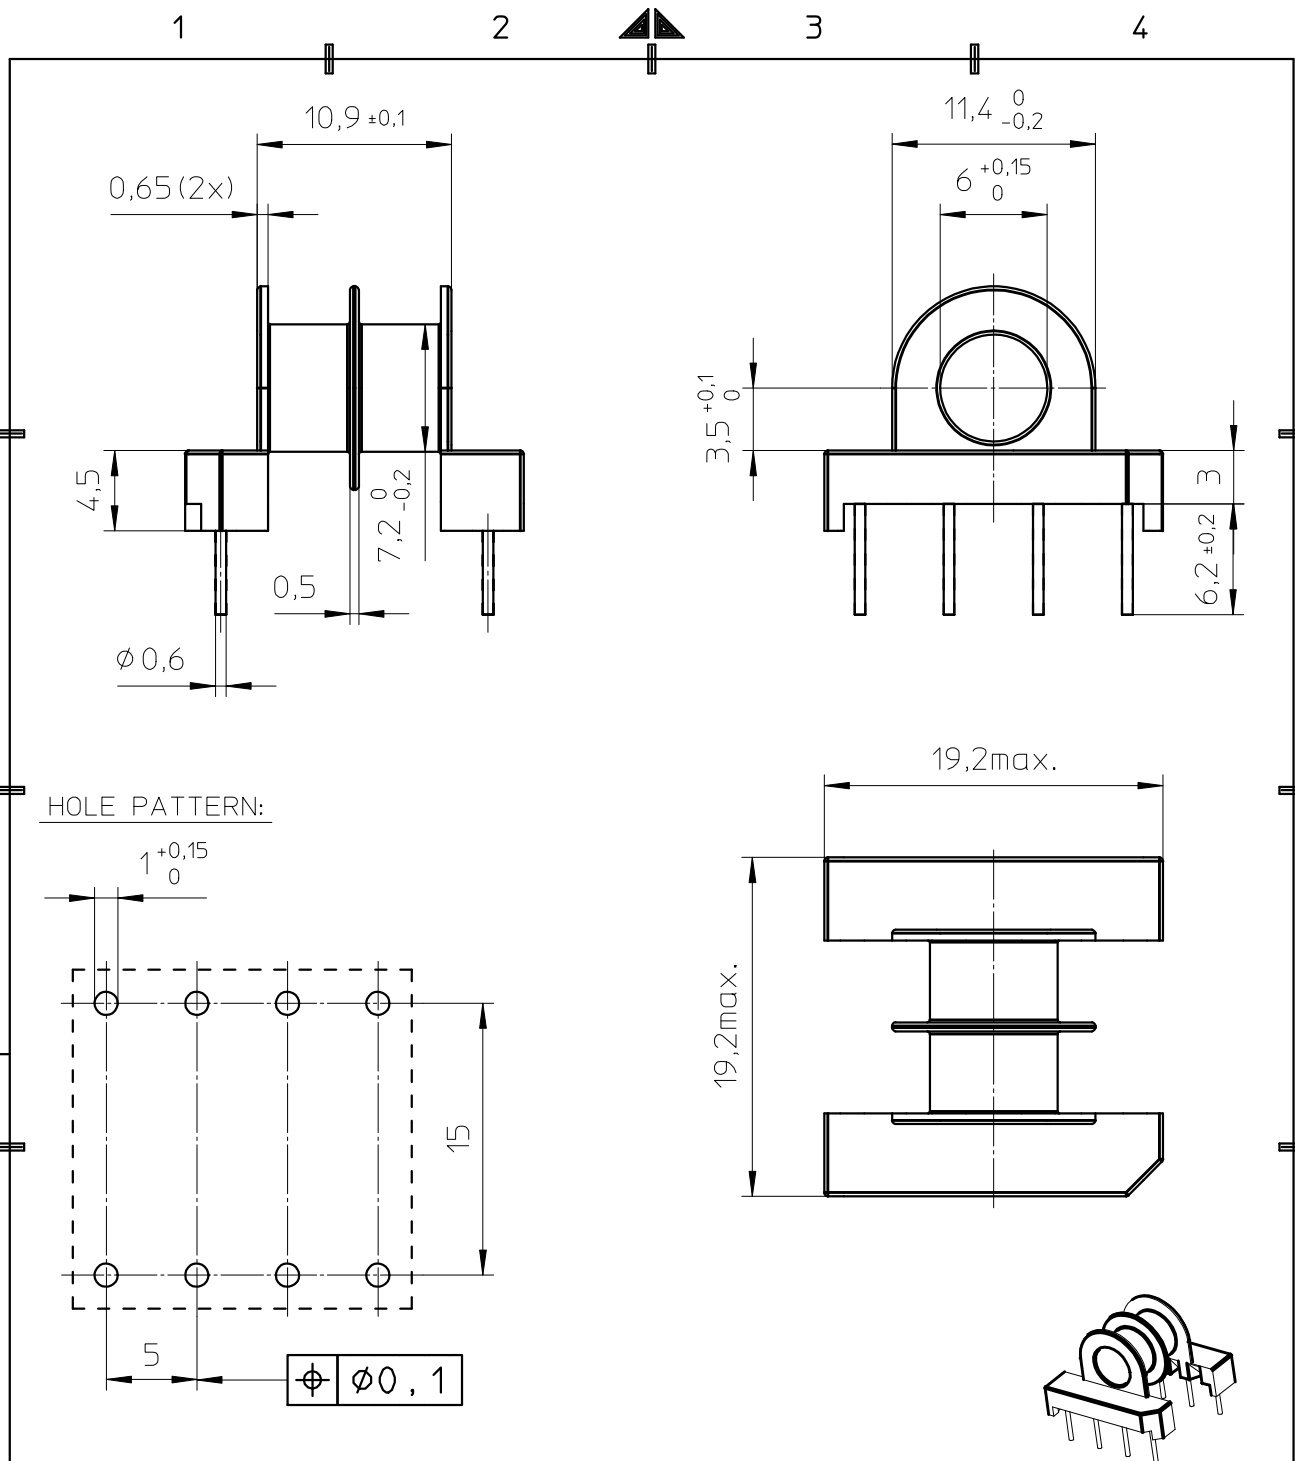




FERROXCUBE



HOLE PATTERN:

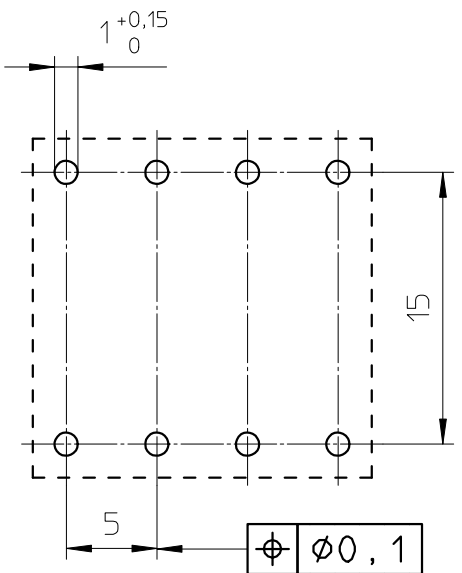

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
 UL file number: E41429(M) - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 85 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1A, 260°C - 5s.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
 Min. winding area: 17,4 mm².
 Mean length of turn: 28,9 mm.



CLASS.NO.		CSH-EP17-2S-8P		4322 021 00491		96-06-07
97-01-29						96-09-20
NAME NAAM		A.Wojtasz		1 SH BL.		112 - 001 010
MPA		CHECK CONTR.	DAT.	96-06-07	Property of Eigendom van	© FERROXCUBE 2000
						97-01-29
						98-01-28
						06-06-28
						A4