
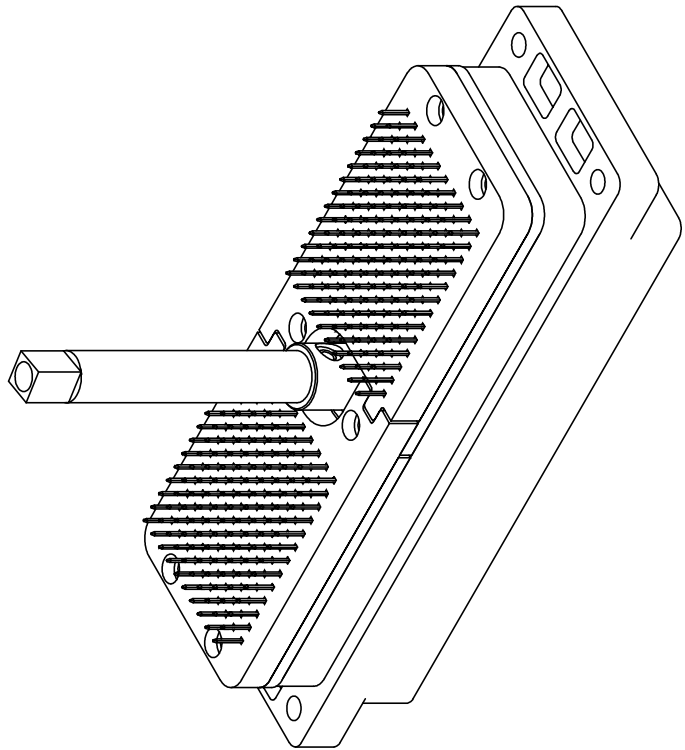
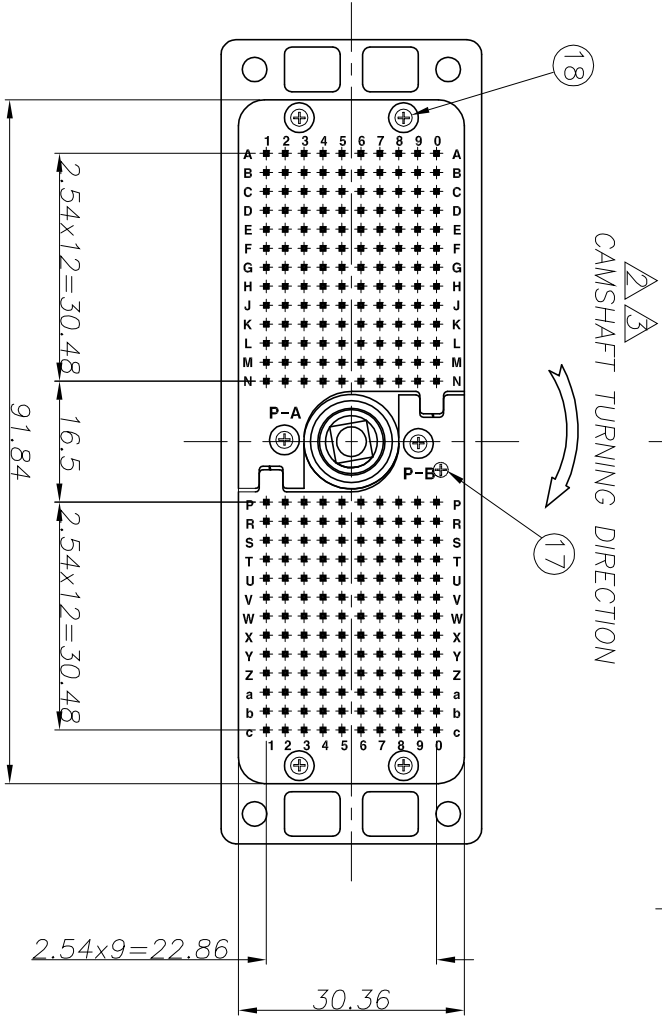
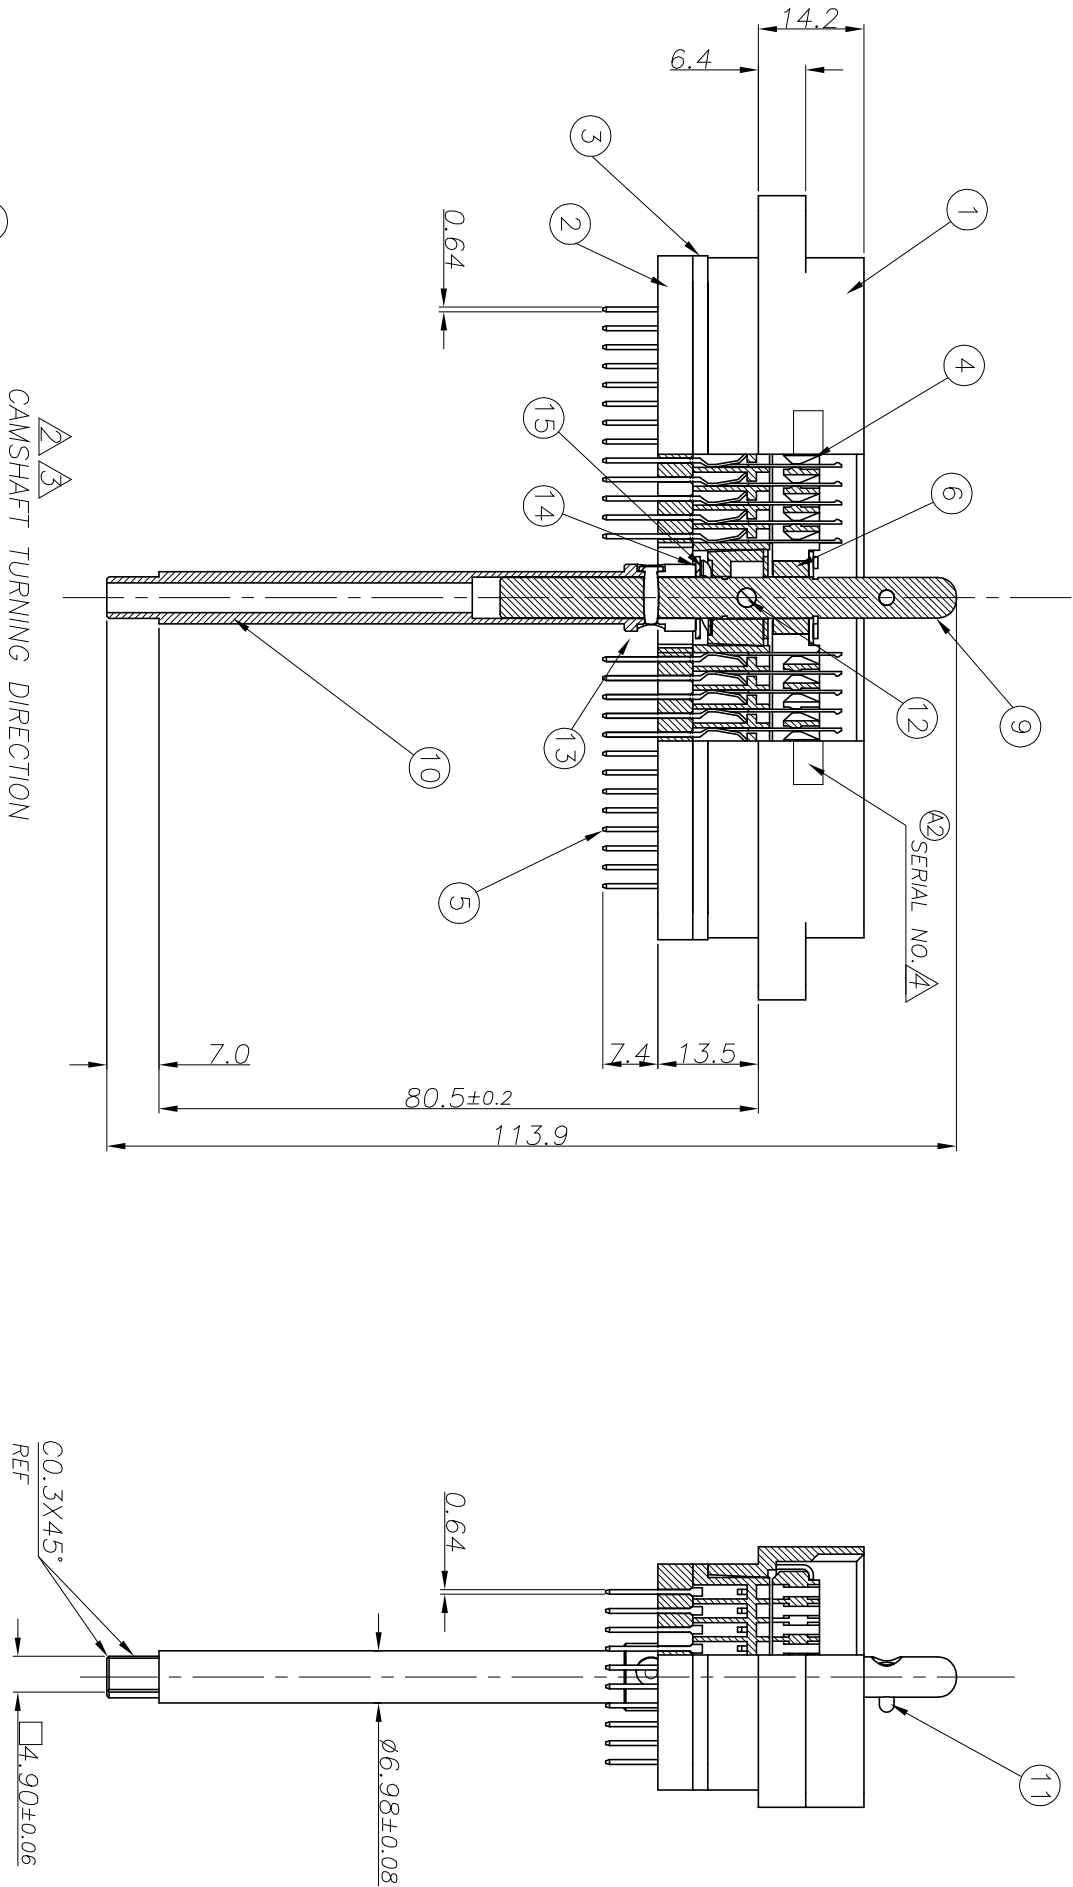


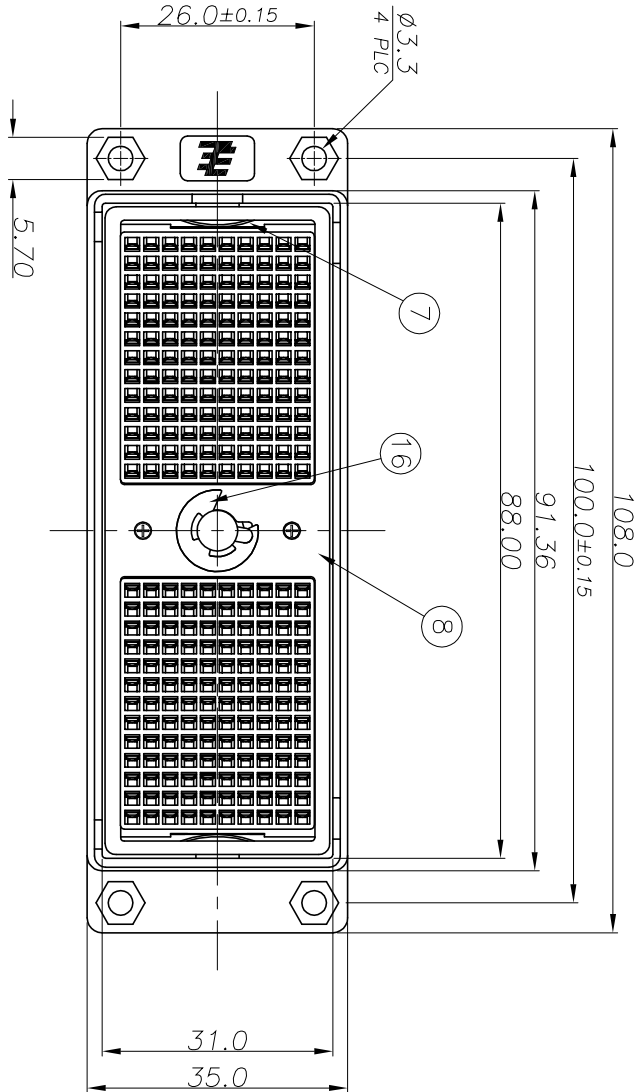

REVISIONS				
LOC	DS	POST	DESCRIPTION	DATE
P	LTR			
A2		REVISED (ECR-08-030584)		23MAR'09
B		REVISED (ECR-09-018162)		18.AUG'09
C		REVISED (ECR-09-027658)		21.DEC'09
D		REVISED (ECR-10-023591)		25.OCT'10

NOTE.
ΔPLATING :
CONTACT AREA : 0.8um MIN. GOLD OVER 2.5um MIN. NICKEL.
OTHERS : GOLD FLASH OVER 2.5um MIN. NICKEL.
ΔTORQUE : 9.5Kg·cm Max.
ΔCAMSHAFT TURNING ANGLE(ON LOCKING SITUATION) : 110°±5°
ΔSERIAL NUMBER: YMMDD-XXXX

18	BOLT M2x8	STAINLESS STEEL	-	-	6
17	BOLT M2x4	STAINLESS STEEL	-	-	10
16	E-RING	STAINLESS STEEL	-	-	1
15	WAVE WASHER	STAINLESS STEEL	-	-	1
14	WASHER	STAINLESS STEEL	-	-	2
13	CAM SHAFT PIN(L)	STAINLESS STEEL	-	-	1
12	CAM SHAFT PIN(M)	STAINLESS STEEL	-	-	1
11	CAM SHAFT PIN(S)	STAINLESS STEEL	-	-	1
10	CAM SHAFT BODY	STAINLESS STEEL	-	-	1
9	CAM SHAFT HEADER	STAINLESS STEEL	-	-	1
8	COVER	STAINLESS STEEL	-	-	1
7	SPRING	STAINLESS STEEL	-	-	2
6	PLUG LOCKING GUIDE	THERMOPLASTIC	-	-	2
5	TERMINAL	COPPER ALLOY	Δ	-	260
4	PLUG SLIDE PLATE	PPS GF30	-	UL 94V-0	2
3	PLUG HOUSING	PBT GF30	-	UL 94V-0	2
2	PIN GUIDE	PC GF30	-	UL 94V-0	2
1	PLUG DIECASTING	ALUMINUM	NICKEL PLATING	-	1

ITEM	DESCRIPTION	MATERIAL	FINISH	REMARK	Q'ty		
DIMENSIONAL INFORMATION 1. ALL DIMENSIONS IN MILLIMETERS 2. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE TO CENTER LINE 3. TOLERANCES ARE AS SHOWN		Tyco Electronics Kyungsoon, Korea					
OH KION		NAME					
MAMURA		MAMURA					
APVD		MAMURA					
PRODUCT SPEC 108-61097		M-ZIF CONN. PLUG 260P SOLDER TYPE					
APPLICATION SPEC							
WEIGHT							
-		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
-		A2		00779	©= 2005801	-	
SEE TABLE		CUSTOMER DRAWING		SCALE	1/1	SHEET 1 OF 1	REV D