SIEMENS

Data sheet



Illuminated twin pushbutton, 22 mm, round, plastic with metal front ring, green: I, red: O, pushbuttons, flat

product brand name	SIRIUS ACT	
product designation	Twin pushbuttons	
design of the product	Actuating/signaling element	
product type designation	3SU1	
product line	Plastic with metal front ring, matt, 22 mm	
Enclosure	Flastic with metal front fling, matt, 22 min	
	1	
number of command points	1	
Actuator		
design of the actuating element	Flat buttons, illuminated	
principle of operation of the actuating element	momentary contact type	
product extension optional		
• light source	Yes	
• contact module	Yes	
color of the actuating element	green / red	
material of the actuating element	plastic	
shape of the actuating element	oval	
marking of the actuating element	" ","O"	
Front ring		
product component front ring	Yes	
design of the front ring	Standard	
material of the front ring	Metal, matt	
color of the front ring	sand gray	
General technical data	General technical data	
protection class IP	IP66, IP67, IP69(IP69K)	
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13	
shock resistance		
 according to IEC 60068-2-27 	sinusoidal half-wave 15g / 11 ms	
 for railway applications according to EN 61373 	Category 1, Class B	
vibration resistance		
 according to IEC 60068-2-6 	10 500 Hz: 5g	
 for railway applications according to EN 61373 	Category 1, Class B	
operating frequency maximum	3 600 1/h	
mechanical service life (operating cycles) typical	2 000 000	
reference code according to IEC 81346-2	S	
Substance Prohibitance (Date)	10/01/2014	
Ambient conditions		
ambient temperature		
during operation	-25 +70 °C	
during storage	-40 +80 °C	
environmental category during operation according to IEC	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)	

60721	
Installation/ mounting/ dimensions	
height	57.9 mm
width	29.9 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	14.4 mm
installation width	29.9 mm
installation depth	25.7 mm

Certificates/ approvals

General Product Approval

Declaration of Conformity



Confirmation









Test Certificates

Marine / Shipping

other

Type Test Certificates/Test Report









Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1031-3AB42-0AK0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1031-3AB42-0AK0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1031-3AB42-0AK0&lang=en

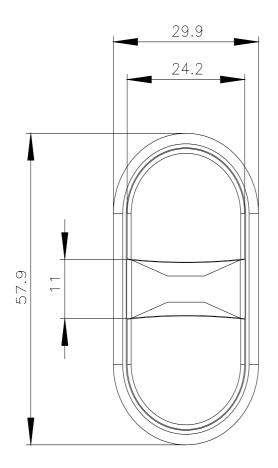

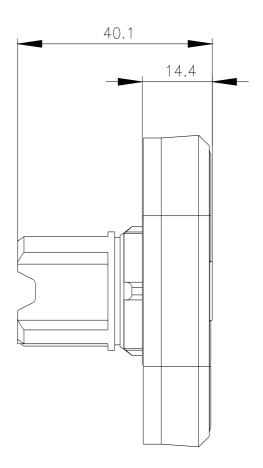

last modified: 1/26/2022 🖸