
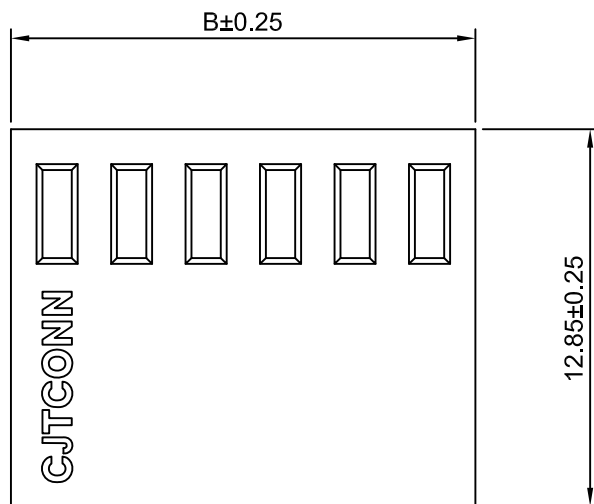


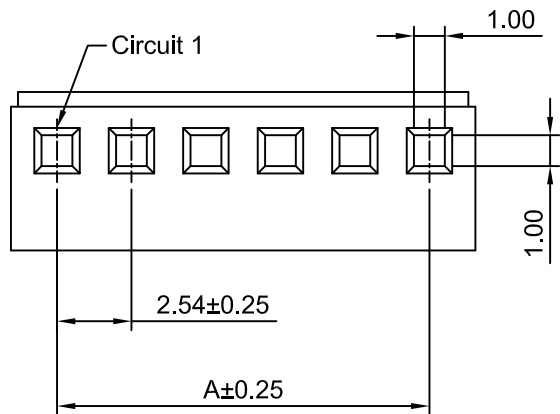

Ordering Information:



A2543HB-XP-WH - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

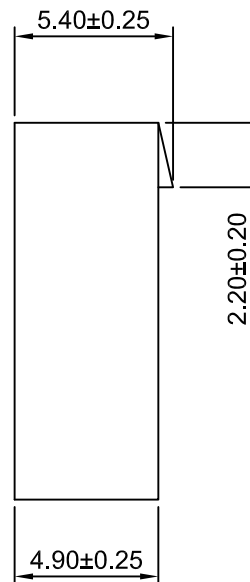

SPECIFICATIONS:

Current Rating: 4A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2543HB-2P-WH	2.54	5.68
A2543HB-3P-WH	5.08	8.22
A2543HB-4P-WH	7.62	10.76
A2543HB-5P-WH	10.16	13.30
A2543HB-6P-WH	12.70	15.84
A2543HB-7P-WH	15.24	18.38
A2543HB-8P-WH	17.78	20.92
A2543HB-9P-WH	20.32	23.46
A2543HB-10P-WH	22.86	26.00
A2543HB-11P-WH	25.40	28.54
A2543HB-12P-WH	27.94	31.08
A2543HB-13P-WH	30.48	33.62
A2543HB-14P-WH	33.02	36.16
A2543HB-15P-WH	35.56	38.70
A2543HB-16P-WH	38.10	41.24
A2543HB-17P-WH	40.64	43.78
A2543HB-18P-WH	43.18	46.32
A2543HB-19P-WH	45.72	48.86
A2543HB-20P-WH	48.26	51.40

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Djankui Wan	Jack Yin	2.54mm PITCH HOUSING
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
			DRAWING NO.
			A2543HB-XP-WH
			REV A1