


SPECIFICATION CONTROL DRAWING

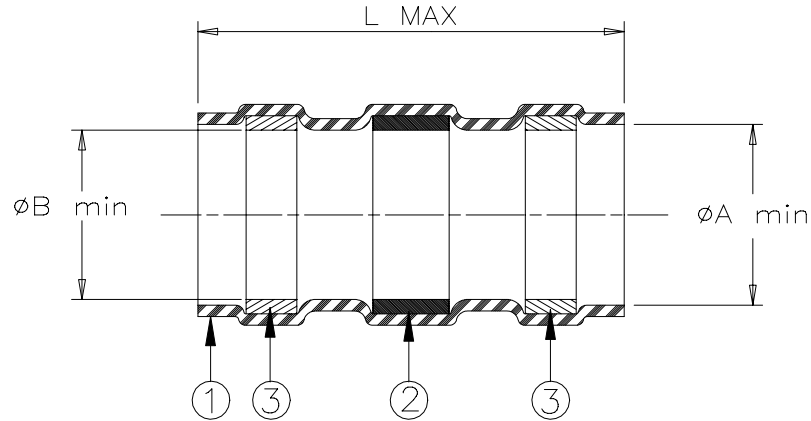

Product Revision		Product Dimensions			Cable Dimensions					
Product Name		L max	ϕA min	ϕB min	ϕC max	ϕD min	ϕE max	ϕF min	G ± 1.0	H ± 1.0
B-050-00	D	55.0	17.0	19.0	18.0	9.0	16.0	8.0	23.0	21.0
B-050-01	E	80.0	22.5	24.5	23.5	12.0	21.5	11.0	31.0	29.0
B-050-02	D	80.0	33.0	35.0	34.0	19.0	32.0	17.5	31.0	29.0


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyolefin.
2. SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Cd18 per ANSI-J-STD-006.
FLUX: TYPE ROM1 per ANSI-J-STD-004.
3. MELTABLE SEALING RINGS: Thermally stabilized thermoplastic. Color: clear.

APPLICATION

1. These controlled soldering devices will terminate a ground wire to the tin-plated or bare copper shield of an electrical cable whose insulation is rated for at least 105°C or higher.
2. Temperature range: -55°C to +125°C. For application tooling, consult your local Raychem technical service.

For best results, prepare the cable as shown:

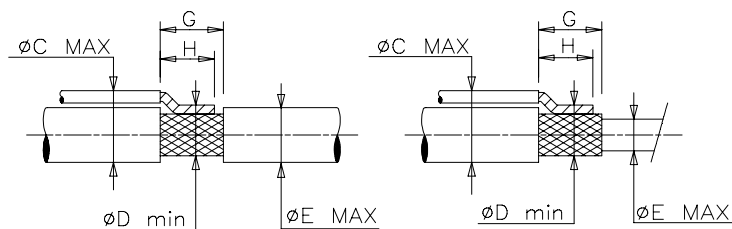

* A trademark of Raychem Corporation.

Raychem		THERMOFIT DEVICES		Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		TITLE: SOLDERSLEEVE DEVICE*, SHIELD TERMINATION-LOW TEMPERATURE							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.						DOCUMENT NO. B-050-00/01/02							
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D980625		REPLACES: B0500X					
DRAWN BY: M. FORONDA		DATE: 06/15/98		PROD. REV. SEE TABLE		DOC ISSUE: 1		SCALE: None		SIZE: A		SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.