
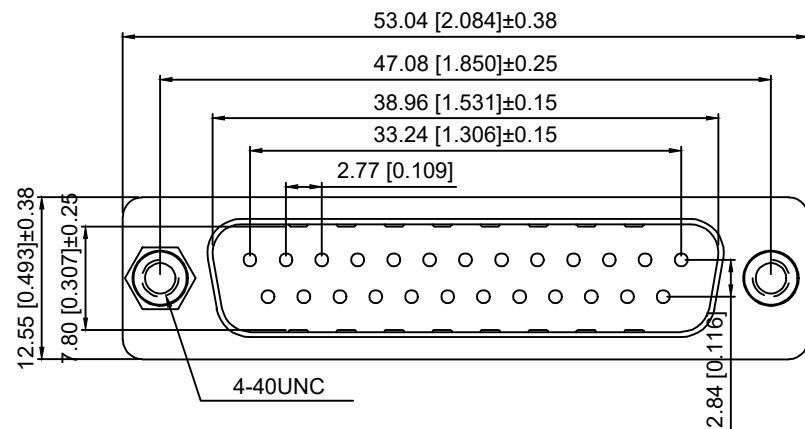
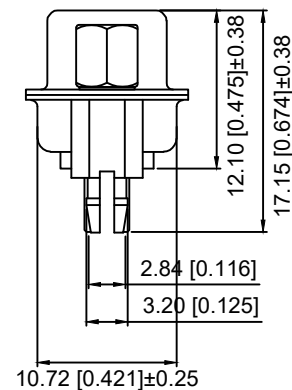


PCB LAYOUT

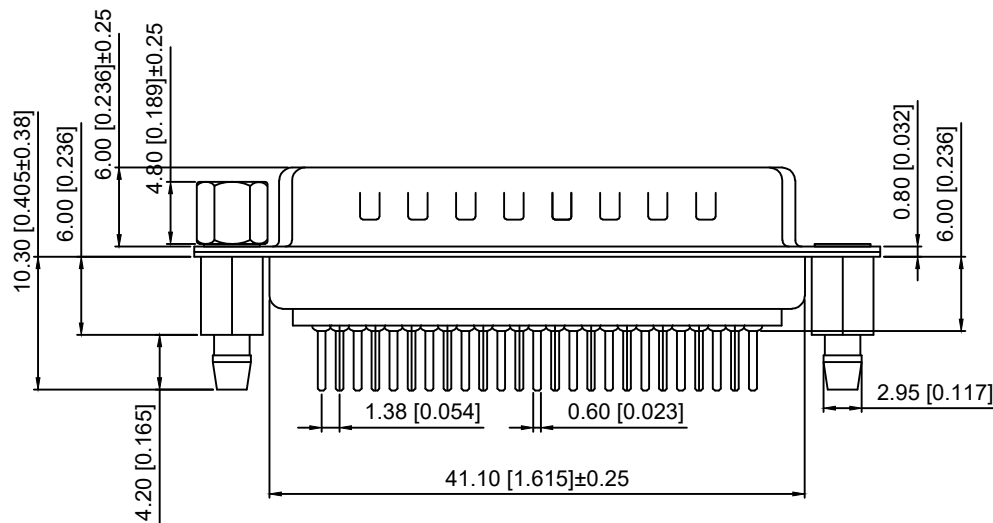

Specifications:

规格:

- 1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
 - 2.Current rating:3A AC/DC
额定电流:3A AC/DC
 - 3.Withstanding voltage:500V AC/minute
耐受电压: ≥500V AC/分钟
 - 4.Temperature range: -25℃~+80℃
温度范围: -25℃~+80℃
 - 5.Insulation resistance:5000MΩMIN
绝缘电阻: ≥5000MΩ
 - 6.Contact resistance:30mΩMax
接触电阻: ≥30mΩ
- Material:
材料:
- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
 - 8.The iron shell:SPCC Terminal half-Gold 15u Matte Tin
铁壳: SPCC 半金15u雾锡
- B、成品不能有弯针，R角不一致等不良。

X02 25 W T 17 B X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series N0.
- ② Row No.Pin No.XX-25;
- ③ Welding Board Angle :W-Male
- ④ T: Tradutional
- ⑤ Planting Categorty: 17-Terminal half-Gold 15u Matte Tin
- ⑥ Color:B-BLACK
- ⑦ 5:TYPE-5 ; 7:TYPE-7

铆合方式	TYPE-7:后铆鱼叉	TYPE-5:铆鱼叉锁螺丝
图示		

						DSND		SCALE: N/A	MODEL TYPE: D-USB			
ΔX					ANGLAR		DWN	VIEW: 	PART NO.: X0225WT17BX			
ΔX					L ≤ 4		±0.2	CHKD	UNIT: mm/in	DWG NO.: X-X0225WT17BX		
ΔX					4<L ≤ 16		±0.3	APPD	SIZE: A4			
ΔX					16<L ≤ 63		±0.4					
MARK	DESCRIPTION				DATE	REVISED	APPROVED	L > 63	±0.5			
REVISIONS						UNSPECIFIED TOLERANCES						
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION	
										1/1	A0	