

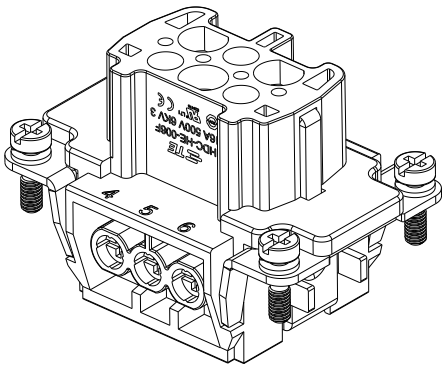
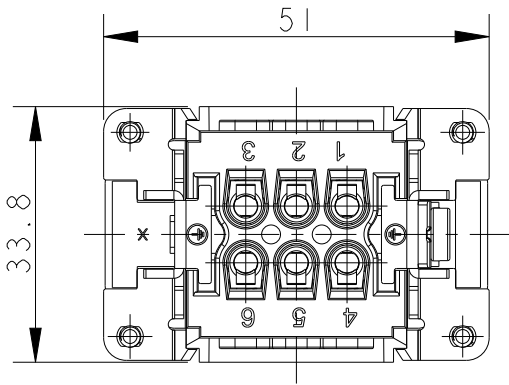
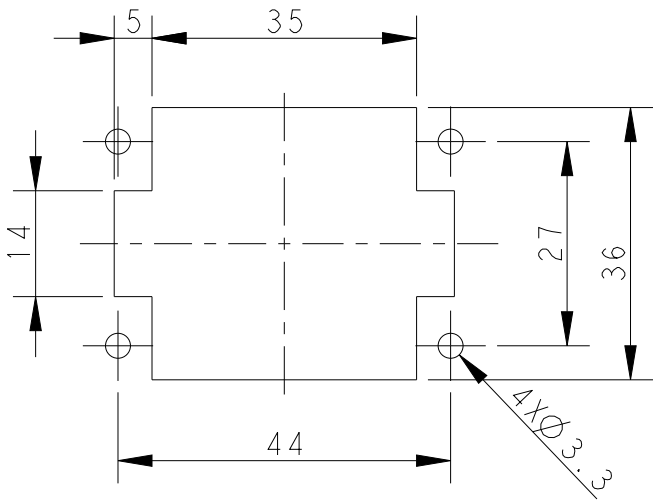


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013759	27SEP	DW	CW
	B1	ECR-16-011988	24AUG2016	YC	CW
	B2	ECR-18-017123	21DEC2018	KW	CW
	C	ECR-21-106515	08JUL2021	SQ	CW

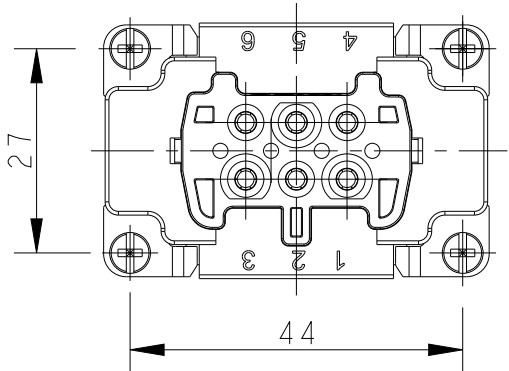


TYPE 1,T2040062201-000,WITH LOGO
类型 1,T2040062201-000,带LOGO

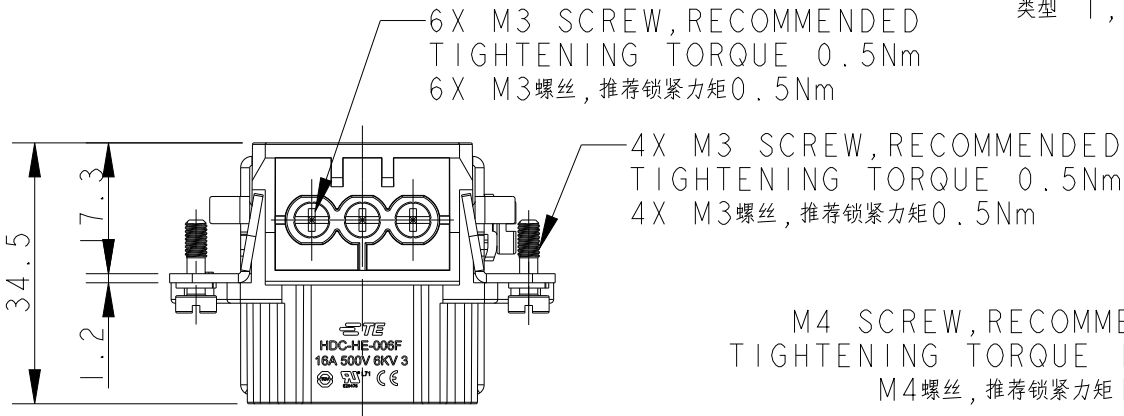

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: $0.5mm^2 \sim 2.5mm^2$ (AWG20-AWG14)
CONTACT TYPE: SCREW CLAMP (M3)

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: $0.5mm^2 \sim 2.5mm^2$ (AWG20-AWG14)
接线类型: 螺丝压接 (M3)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GINO YAO 05APR2015		 TE Connectivity									
		CHK CHRIS WANG 05APR2015											
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- ±-		APVD XIANG XU 05APR2015									
				PRODUCT SPEC 108-137044									
				APPLICATION SPEC 114-137044									
				WEIGHT -									
				CUSTOMER DRAWING									
MATERIAL - -		FINISH - -		NAME HE-006-F		SIZE A3		CAGE CODE 00779		DRAWING NO C-T2040062201000		RESTRICTED TO	
						SCALE 1:1		SHEET 1 OF 2		REV C			