
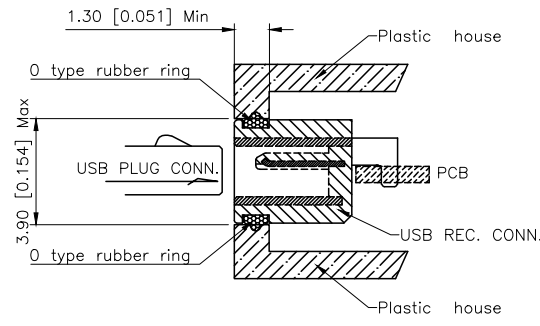
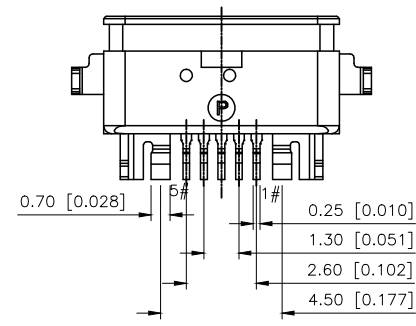
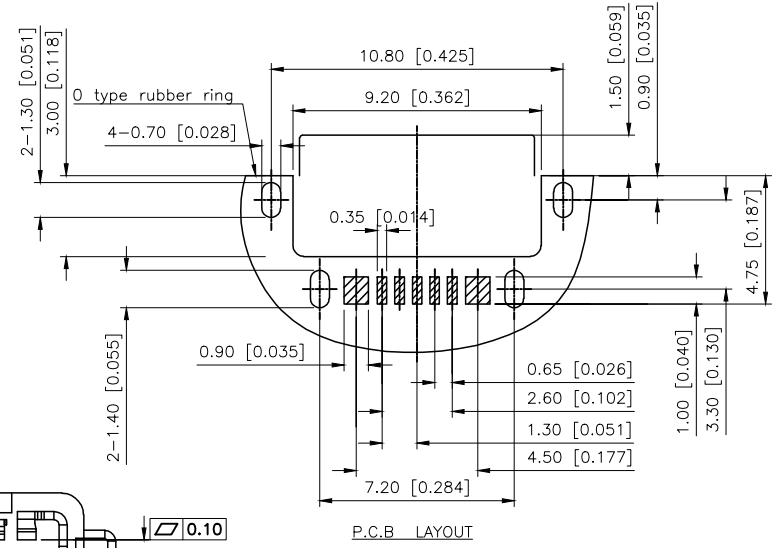
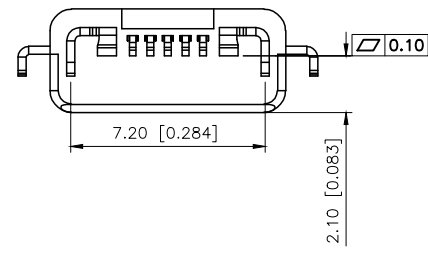
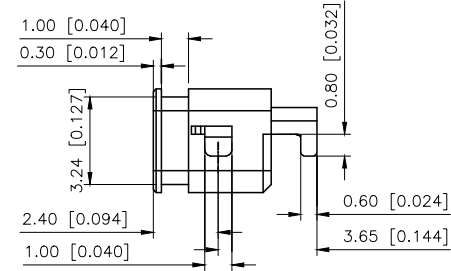
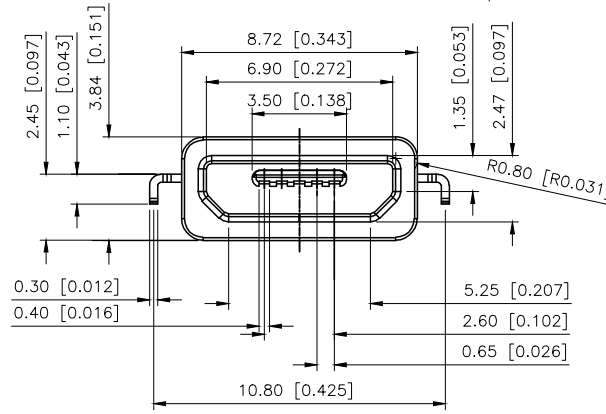



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.10	阿树

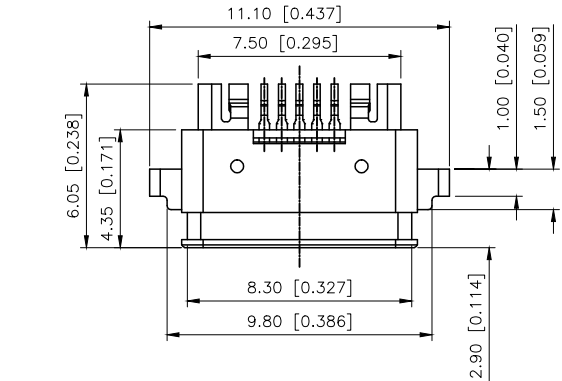

Notes:
1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ∇ & $\blacktriangledown$ should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.
Specification
1.Current Rating: 1.8 AMP
2.Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4.Contact Resistance:30m Ω Max.
5. Insulator Resistance:500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 5000cycles
7. Temperature. -30°C to +80

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	MICRO USB
CHECKED		UNIT:	mm/in	PART NO.:	U-E-M1SS-W-2
APPROVED		SIZE:	A4	DWG NO.:	