

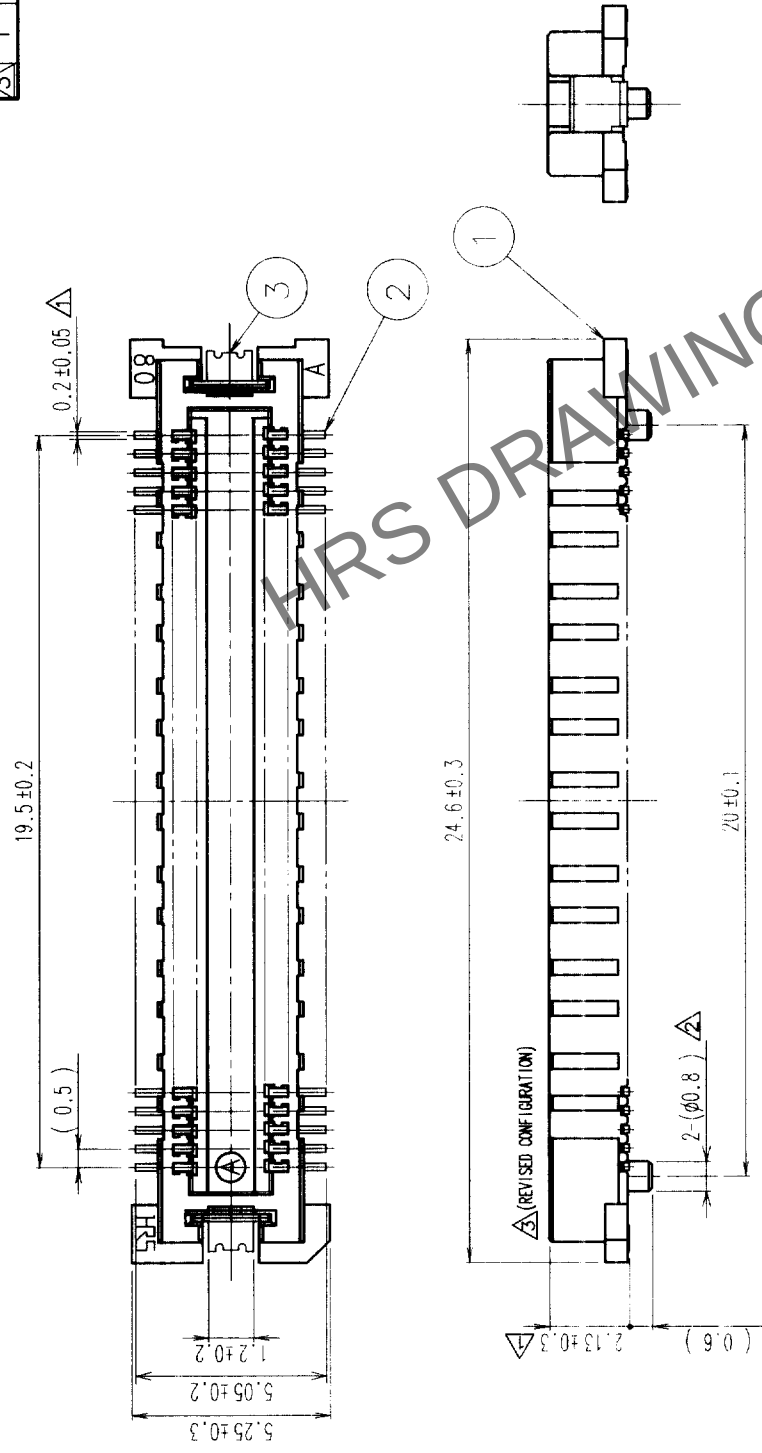


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
<u>1</u>	2	RE-F-06522	J.M.M.1	99.08.24	△					
<u>2</u>	1	RE-F-06759	J.M.M.1	00.01.12	△					
<u>3</u>	1	RE-F-06801	J.M.Y.Y	00.02.16	△					

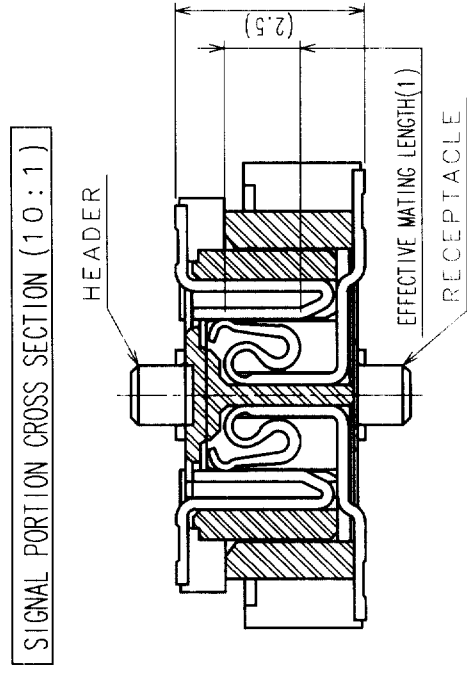

RECOMMENDED LAND PATTERN DIMENSION OF PCB

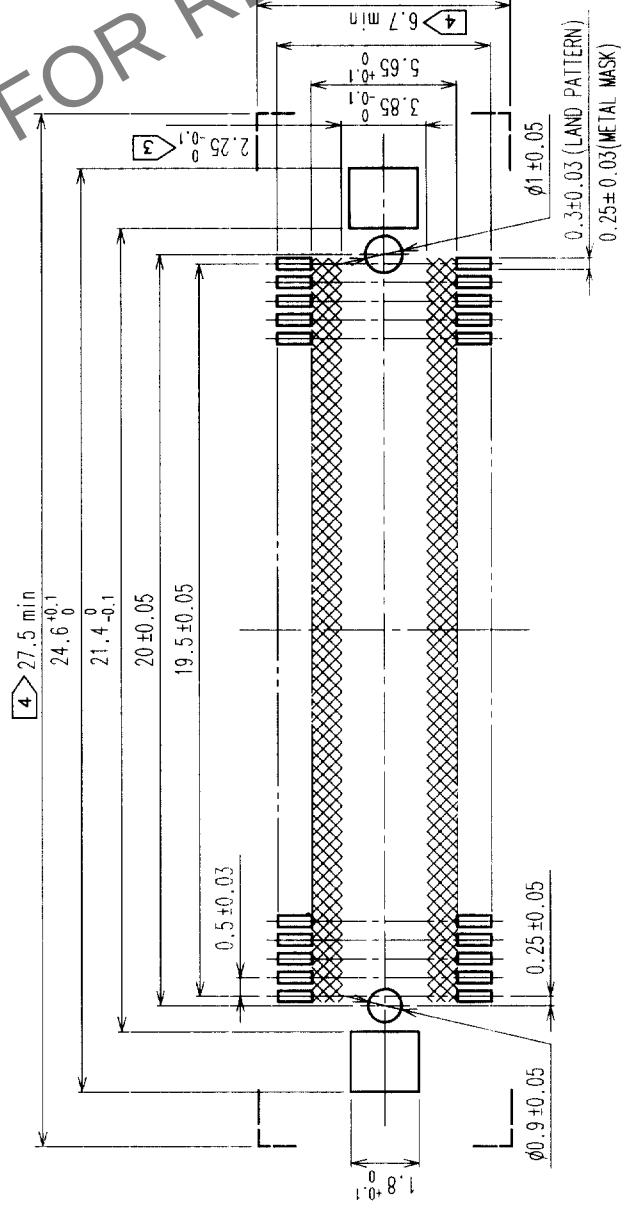

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1µm) OVER NICKEL
1	LCP	LEAD: GOLD FLASH OVER NICKEL
NO.	MATERIAL	BEIGE UL94V-0
CODE NO. (OLD) CL		FINISH, REMARKS
		DRAW

1	LCP	BEIGE	UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	J. Matsukawa	J. Matsukawa	M. Ishida	Y. Yoshimura	
	99.06.07	99.06.07	99.06.07	99.06.08	

		DRAWING NO. EDC3-152439	PART NO. FX11A-80P-SV	1/1
SCALE 5 : 1				
UNITS mm		HRS HIROSE ELECTRIC CO., LTD. CL573-0548-0		

NOTES

- 1 SMT LEAD-COPLANARITY:0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
- 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
- 4 DO NOT MOUNT OTHER DEVICES ONTO  AREA ,OR MATING PAIR CANNOT BE MATED.

TO	PCK			
----	-----	--	--	--