

Type No.: DPT2.5/4

COLOR : [](blank) : gray

BU : blue

OG : orange




GN : green

RD : red

YE : yellow



RoHS
Compliant

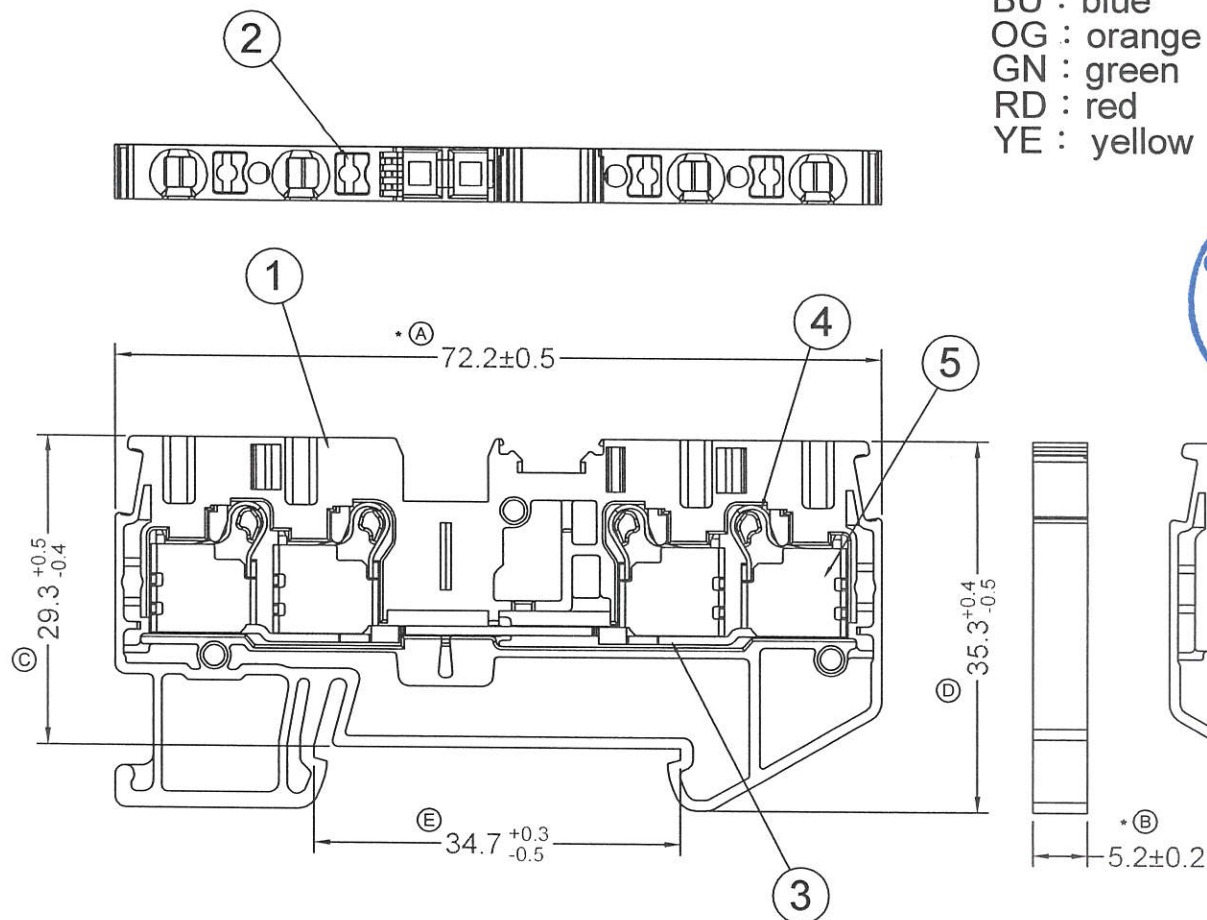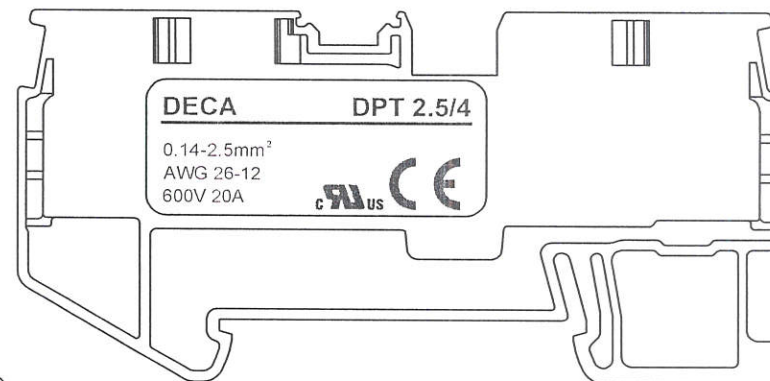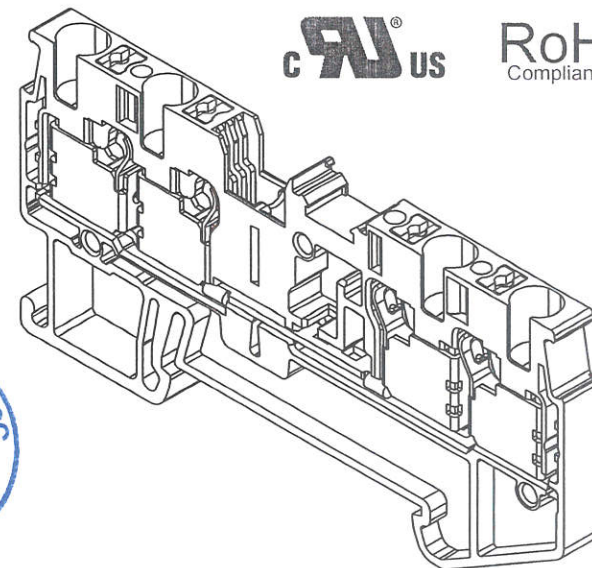

1. Rated current & voltage : 20Amp 600V(UL B,C class)
2. Rated current & voltage : 24Amp 800V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 8mm-10mm
6. Wire size : 26 - 12 AWG (0.14-2.5mm²)

CONFIRMED & ACCEPTED BY

	Material		QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1		
2	Button	PBT	4		
3	Terminal	COPPER	1	Tin plated	
4	Spring	STAINLESS	4		
5	Shell	STEEL	4	Zinc plated	

DECA SwitchLab Inc.

PART NAME

UNIT

SCALE

Terminal Blocks

MM

X

DESIGN

CHECK

APPROVE

DRAWING NO.

SHEET

DATE

DATE

DATE

DPT2.5/4 x

1/1

2020/10/05

2020/10/05

2020/10/05