

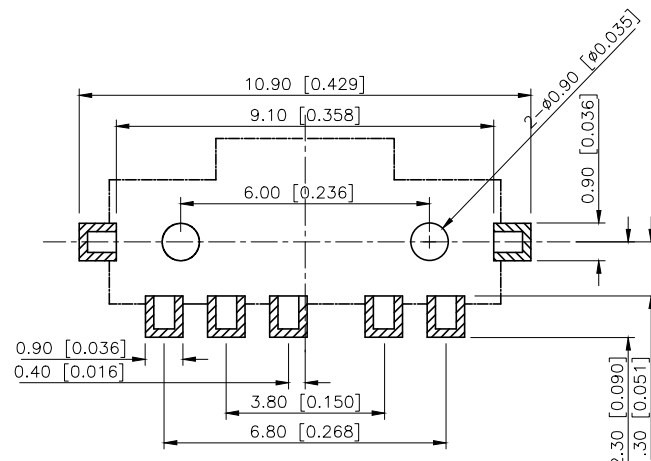
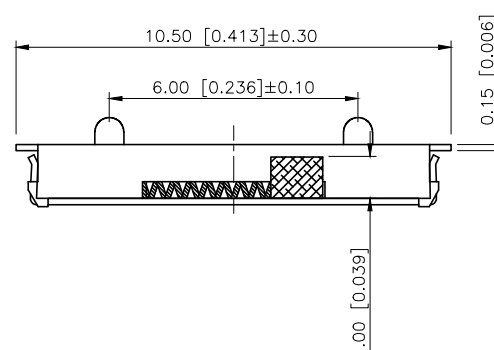
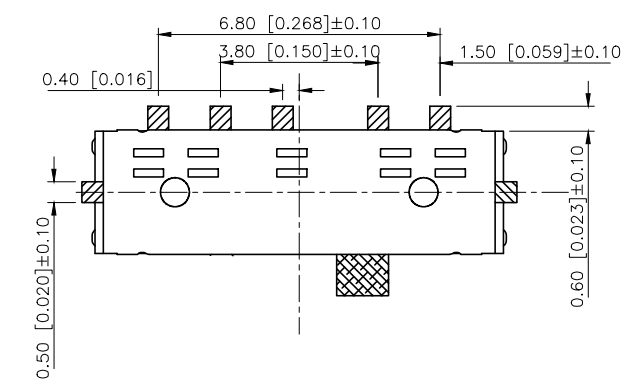
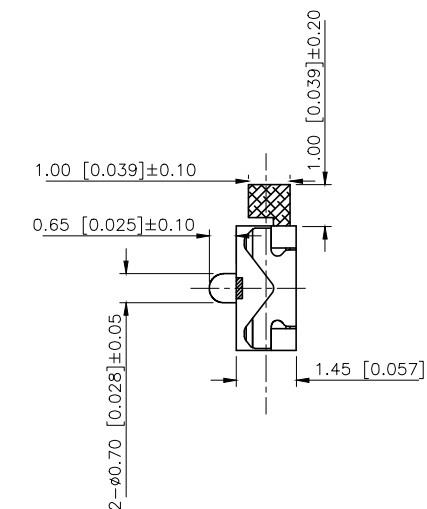


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.17	阿树

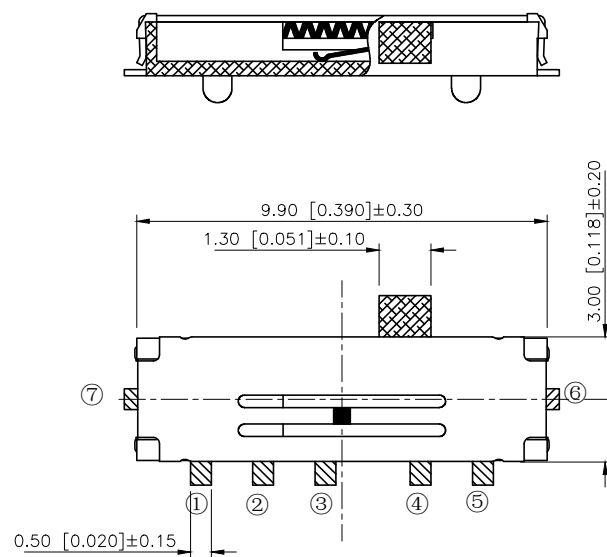

RATING 额定值	0.5A 50V DC
CONTACT RESISTANCE 接触电阻	100m MAX.
TRAVEL 行程	1.50mm±0.15
OPERATING FORCE 操作力	200±100gf
OPERATING LIFE(cycles) 运行寿命(次)	10,000

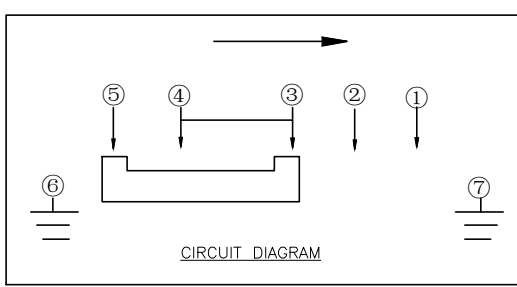

5	Spring		Sus	ag Plated
4	Terminal	1	Phosphor branze	ag Plated
3	Base	1	PPA	Black
2	Cover	1	Sus	ag Plated
1	Keystake	1	PA66	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SK-3393M-G1
APPROVED		SIZE:	A4	DWG NO.:	