


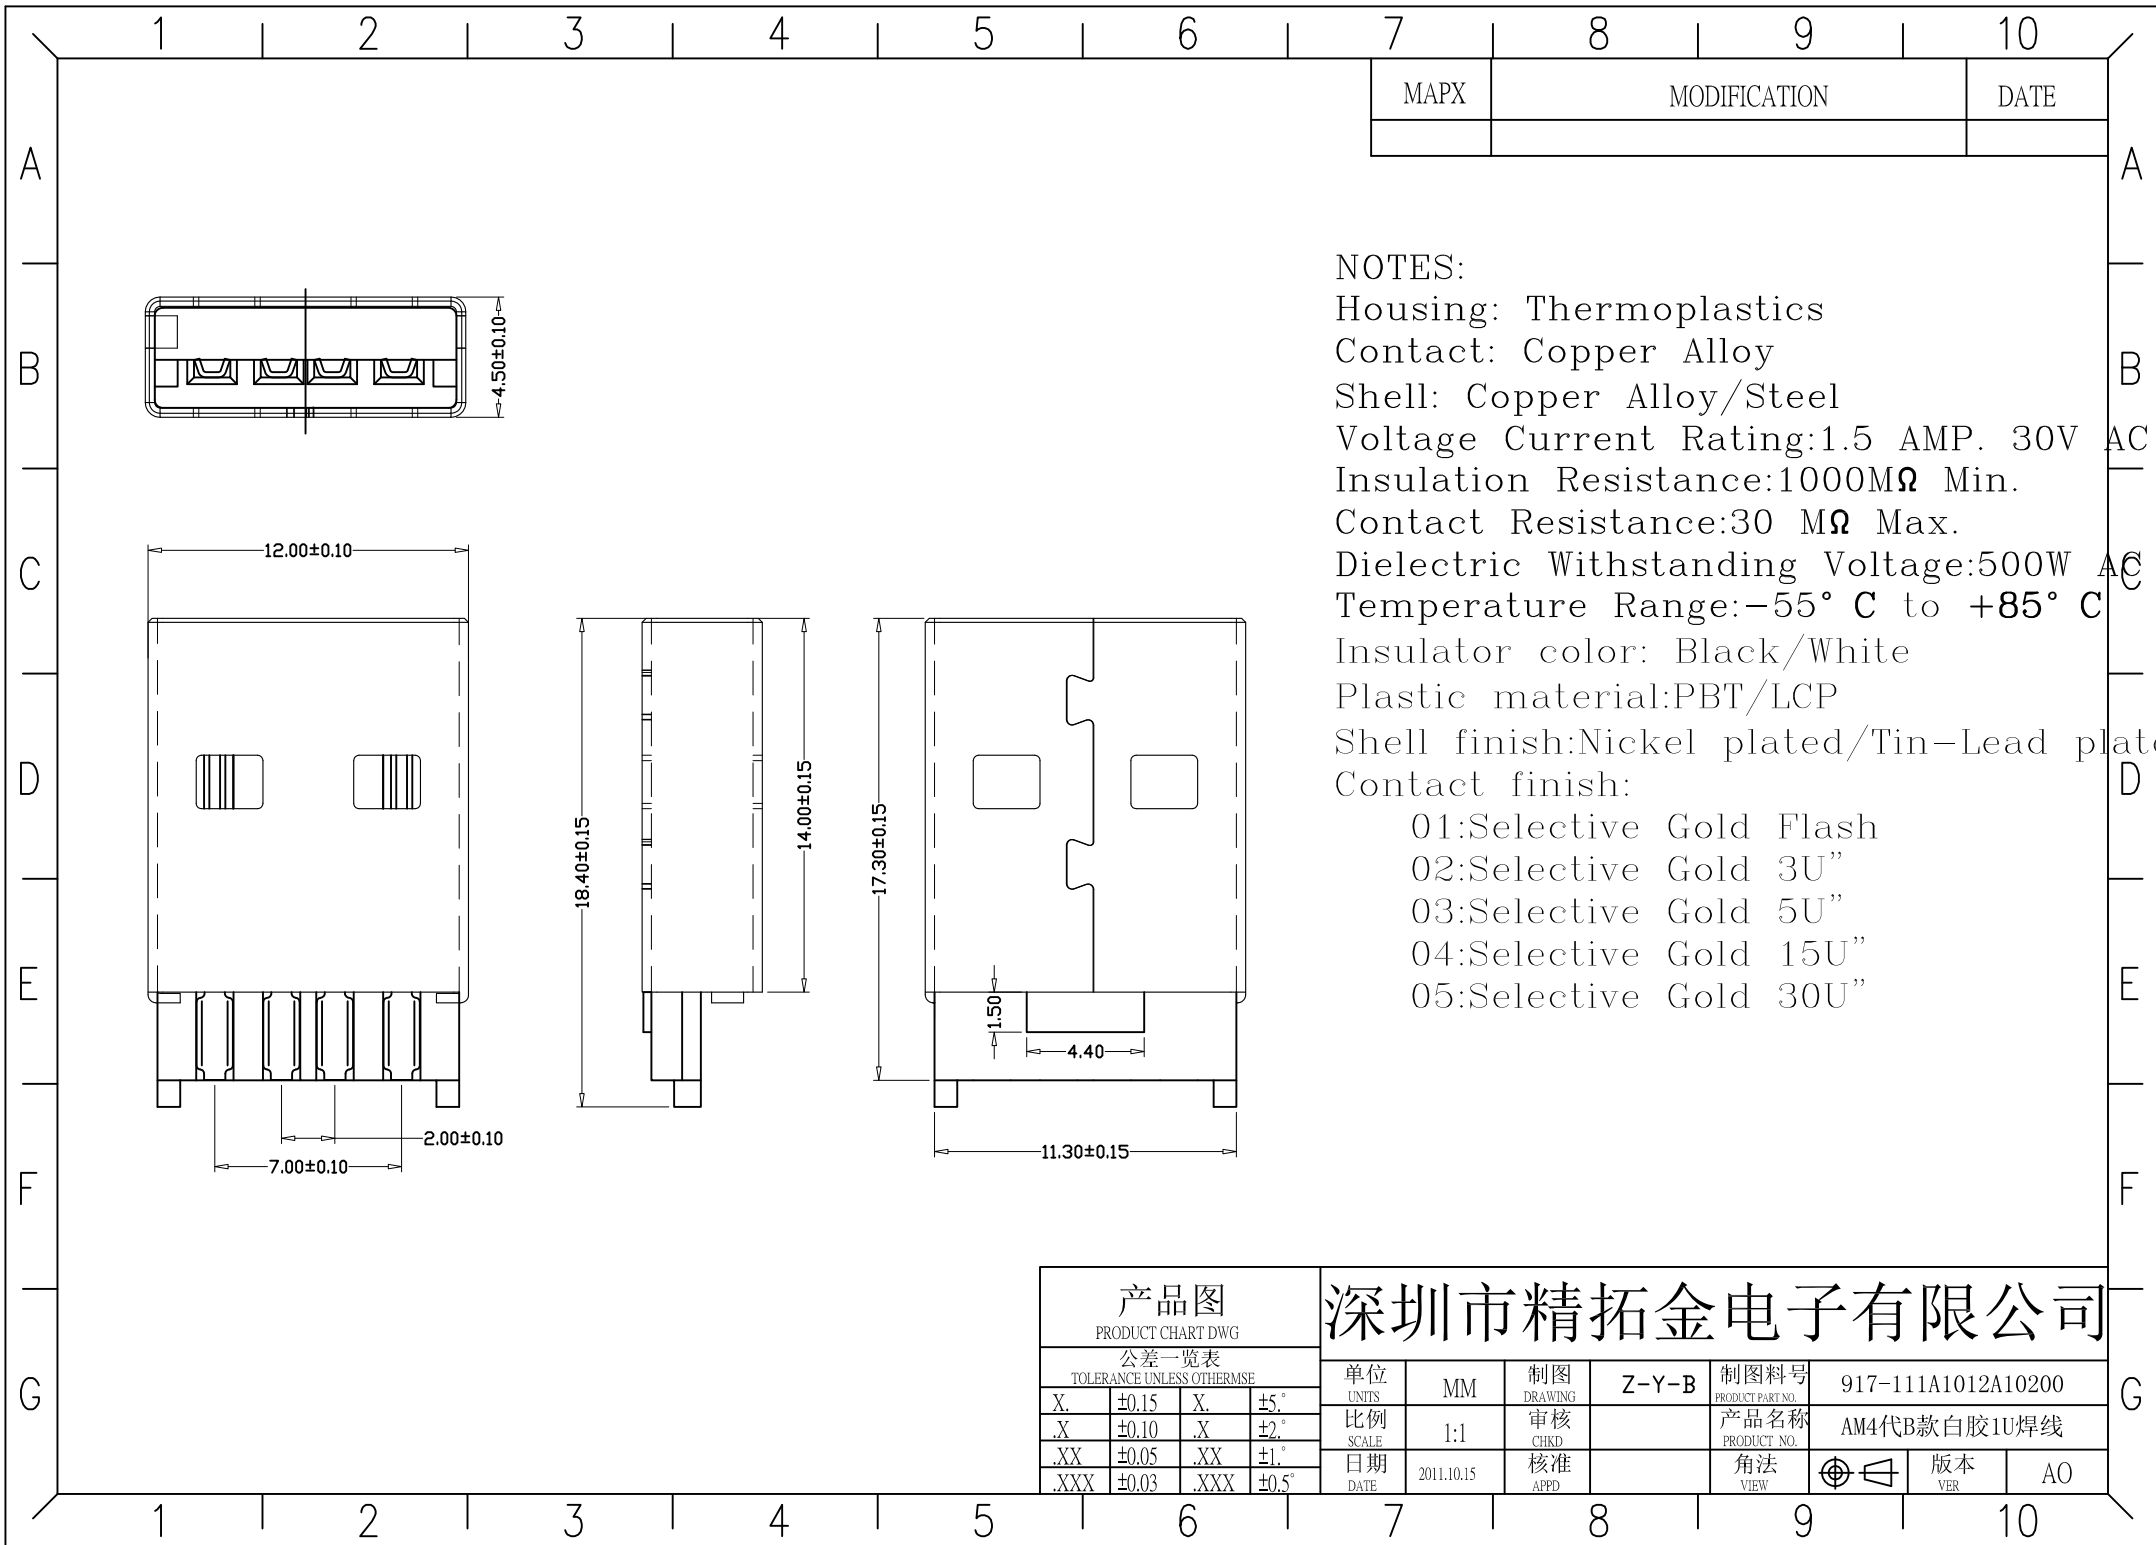

NOTES:

Housing: Thermoplastics

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000M Ω Min.

Contact Resistance:30 M Ω Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-55° C to +85° C

Insulator color: Black/White

Plastic material:PBT/LCP

Shell finish:Nickel plated/Tin-Lead plated

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	± 0.15	X.	$\pm 5^\circ$
.X	± 0.10	.X	$\pm 2^\circ$
.XX	± 0.05	.XX	$\pm 1^\circ$
.XXX	± 0.03	.XXX	$\pm 0.5^\circ$

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	917-111A1012A10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AM4代B款白胶1U焊线
日期 DATE	2011.10.15	核准 APPD		角法 VIEW	 版本 VER
					AO