
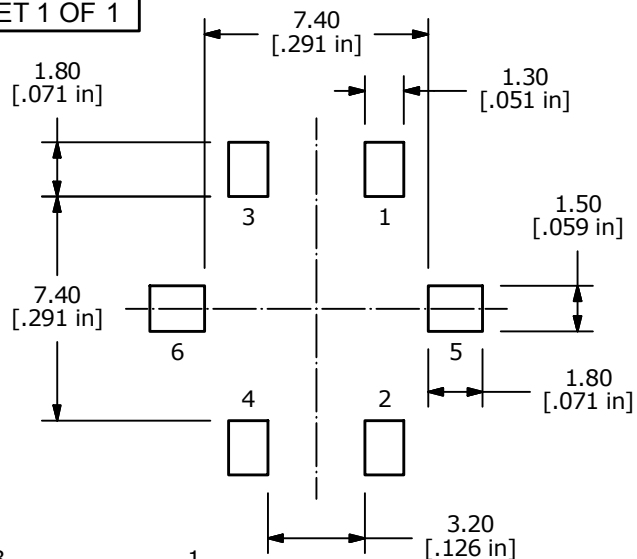



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- RATING: 12VDC @ 50mA
- CONTACT RESISTANCE: 100m Ω MAX.
- INSULATION RESISTANCE: 100M Ω MIN.
- OPERATING FORCE: 160 $\pm$ 50gf
- TRAVEL: 0.2 $\pm$ 0.1mm
- OPERATING TEMPERATURE: -40°C to 85°C
- OPERATING LIFE 500,000 CYCLES
- ▲ LED COLOR: BLUE
- ▲ DENOTED CRITICAL PARAMETER
- 2011/65/EU (ROHS) COMPLIANT
- PACKAGE: 450 PIECES PER REEL.
- PART TO BE HALOGEN FREE.

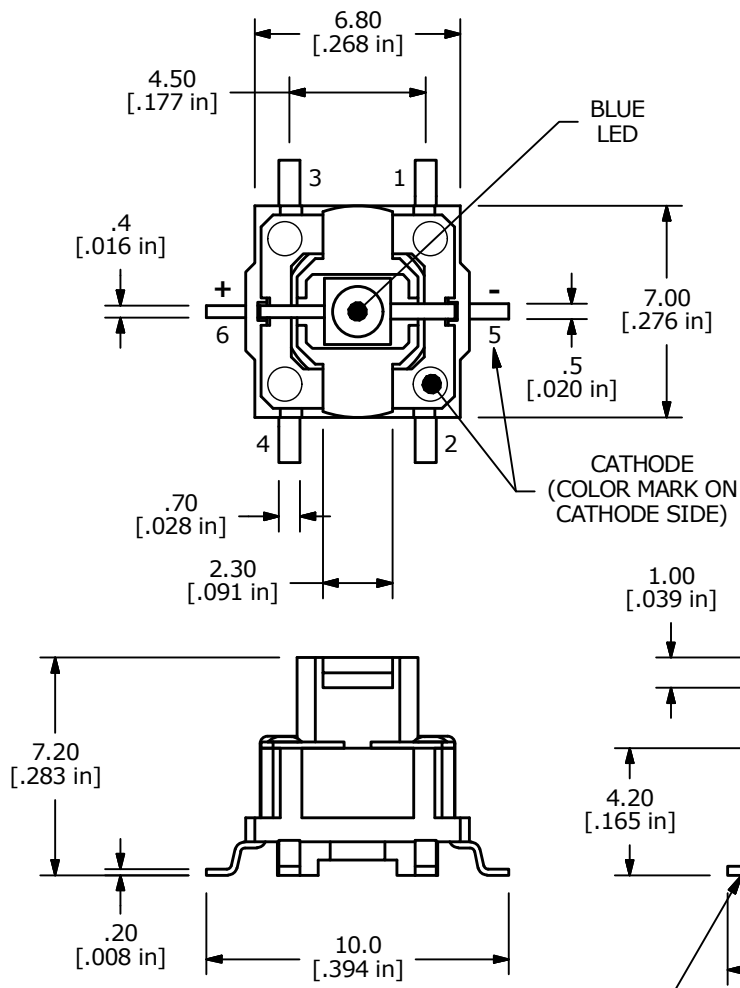

ALL TERMINALS TO BE
COPLANAR WITHIN
0.1mm(0.004")

LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.9 TYP. - 4.0 MAX.
LUMINOUS INTENSITY	MCD	150 TYP.

B	23036	update Package Note	10/9/17	MW
A	22935	New Release	7/20/17	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

TITLE TL3265BQNN

SCALE

4:1

DATE

7/5/2017

DR

rc

DWG

B200070

REV

B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[TL3265BQNN](#)