


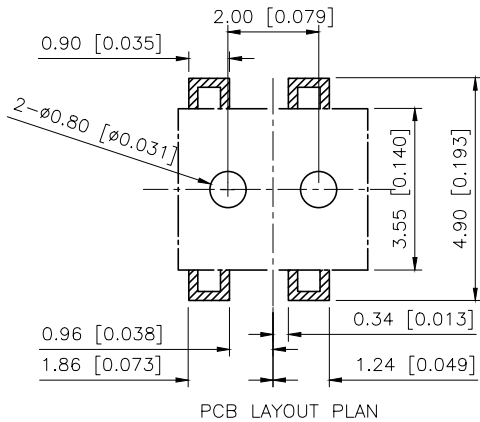
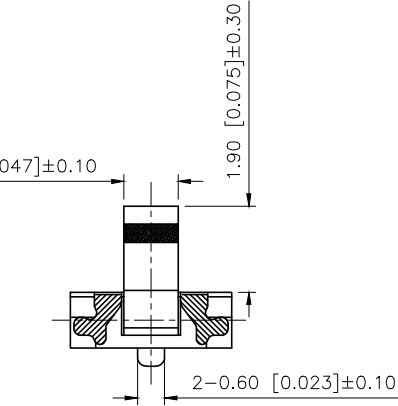
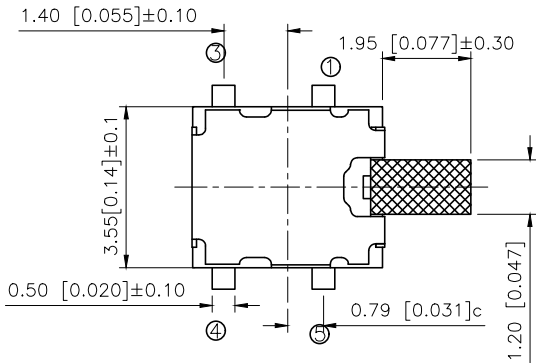


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.24	阿树

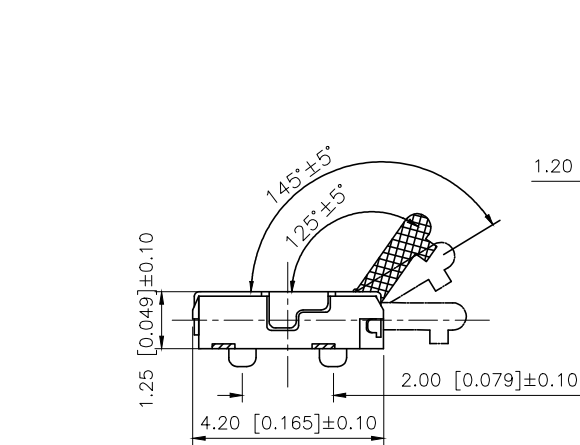

CIRCUIT DIAGRAM

Rated range:50mA DC12V
Insulation resistance:≥100MΩmin (DC100V)
Compressive strength:AC100V(50/60Hzfof1minute)
Mechanical life:50000 cycles
Operating temperature:-10℃~+60℃
Operation strength:50±30gf

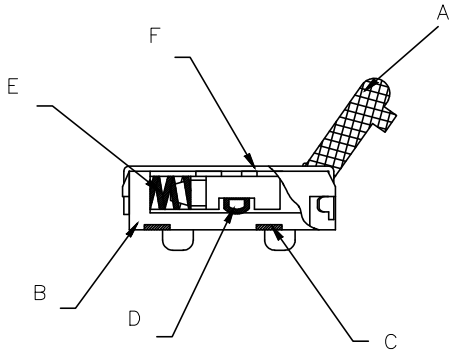

F	lid	1	SUS	silvery white
E	Shrapnel	1	SUS	silvery white
D	Contact plate	1	PPA	black
C	Solder patch	1	Phosphor bronze	silvery white
B	base	1	PPA	black
A	Button	1	PA66	wihte
ITEM	PAPT NAMF	QTY	Material	Colour

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	DETECT SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	TM-1201-X
APPROVED		SIZE:	A4	DWG NO.:	