






REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.13	阿树

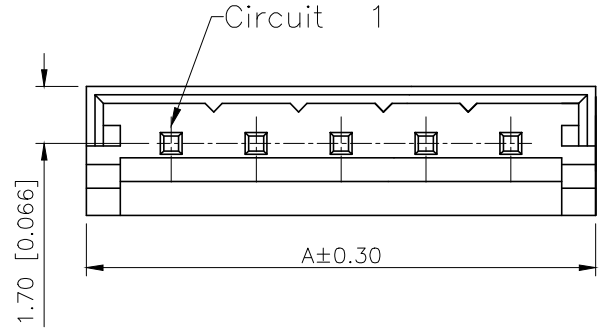

Without Kink



With Kink






With Reverse Kink

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:−40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ

PART NO.:

X2581 W V-XX-N0 SN
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Row No.Pin No:XX-02~15Pin
⑤Material: N0-PA66 UL94V-0
⑥Planting:SN-Bright Tin Plated

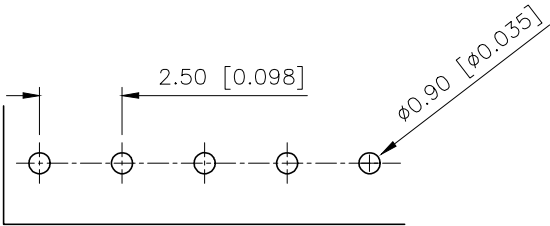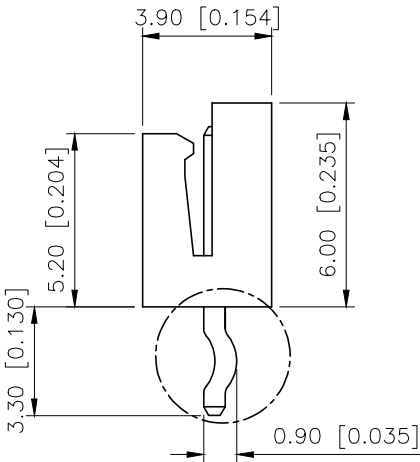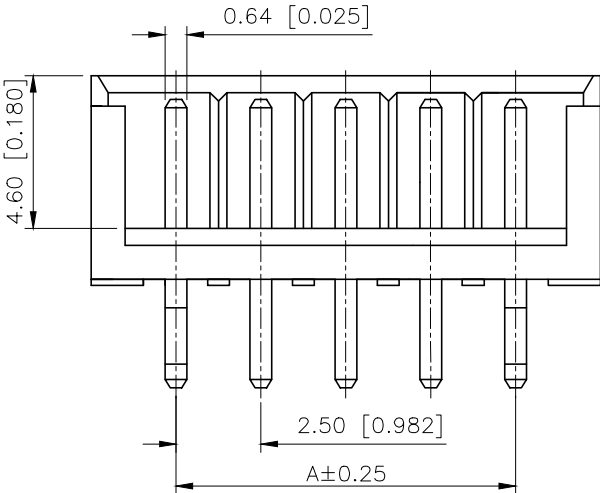

PCB LAYOUT

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.50	7.50	09	20.00	25.00
03	5.00	10.00	10	22.50	27.50
04	7.50	12.50	11	25.00	30.00
05	10.00	15.00	12	27.50	32.50
06	12.50	17.50	13	30.00	35.00
07	15.00	20.00	14	32.50	37.50
08	17.50	22.50	15	35.00	40.00

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	2.50mm Crimp Style Connectors
PART NO.:	X2581WV-XX-N0SN
DWG NO.:	