
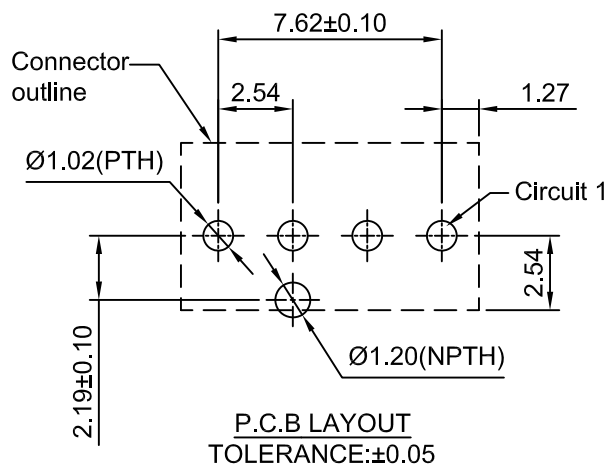


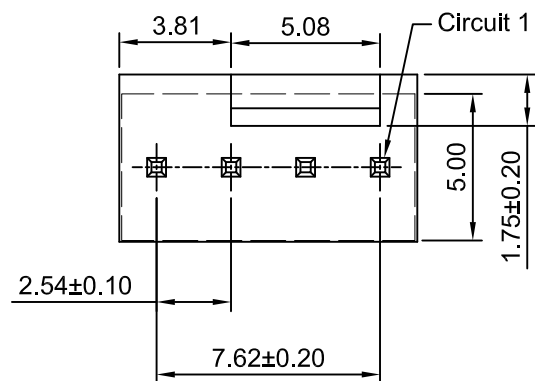

Ordering Information:

A2543WVC-F-4P-46 - *** - ***
1 2 3

1.Part NO.

2.Finish:



(Blank): Tin over Nickel

G: Gold over Nickel(Au:1u")

3.Packing:

(Blank): bag

CRE: Tape & Reel with cap

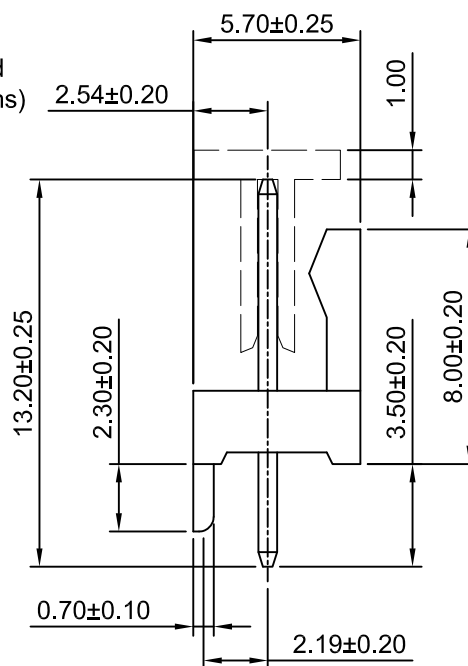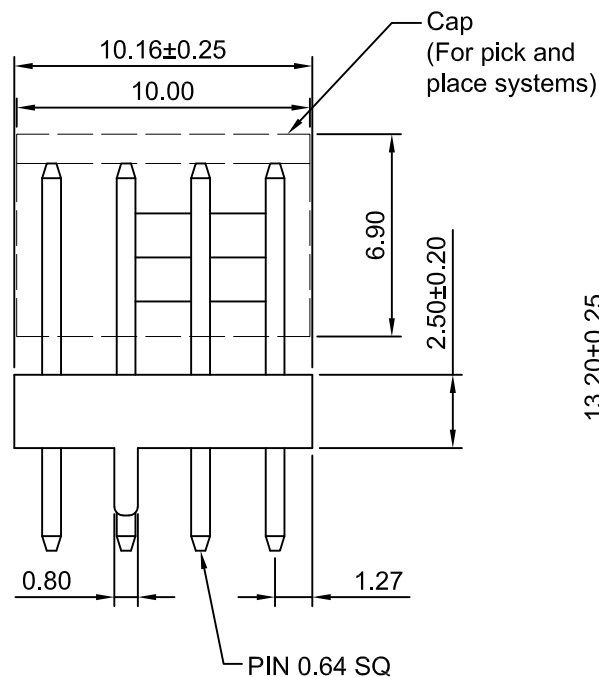

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material:Brass

Material: Nylon 46,UL94V-0(Beige)

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	2.54mm PITCH 180° WAFER
DRWN	CHK'D	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO. A2543WVC-F-4P-46
			REV A2