

REQUIREMENTS

Technical characteristics:

Shell: steel tin plated/Zinc Cr3 plated
Insulators: self-extinguishing black polyster, ULclass94V0
Contacts size 20: brass, gold 0.76 μ on mating end, bright tin on termination end over nickel on entire contact
Cycles : >500 for plating 6
>200 for plating 4

Harpoons: phosphor bronze, tin plated
Metal plate for electrical continuity: brass, tin plated/Zinc Cr3 plated
Nuts: brass, tin/Zinc Cr3 plated

Electrical characteristics:





max. current rating: 5A
Test voltage: 1000V
Rated voltage: 300V
Contact resistance: $\leq 15\text{m}\Omega$
Shell resistance: $\leq 5\text{m}\Omega$
Insulation resistance: $\geq 5000\text{M}\Omega$

Climatic characteristics:


Operating temperature range: -55°C $+125^{\circ}\text{C}$

Dimensions:

in accordance with MIL-C-24308

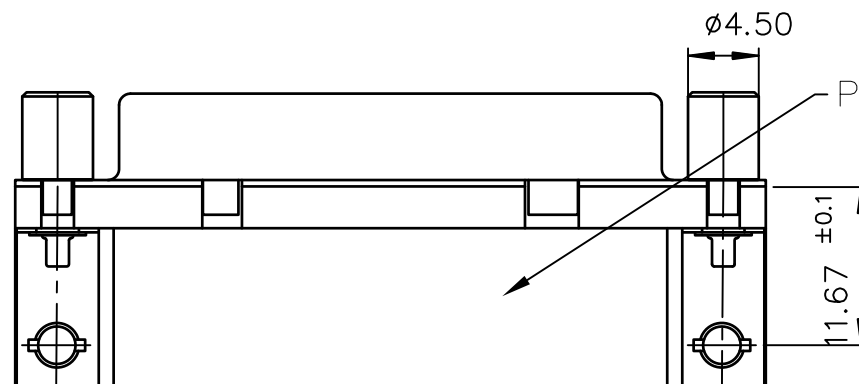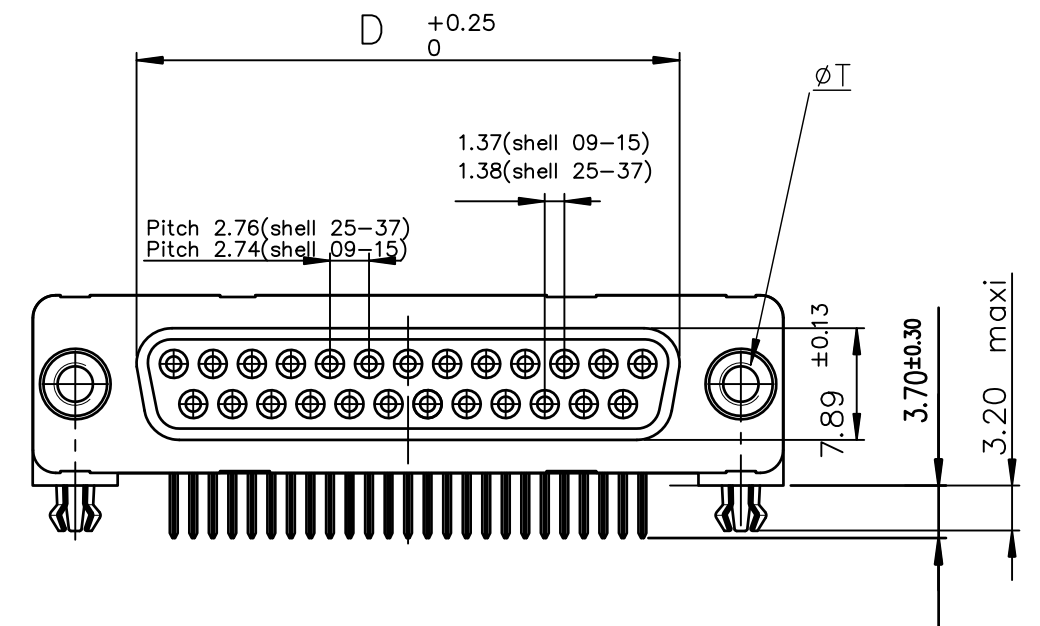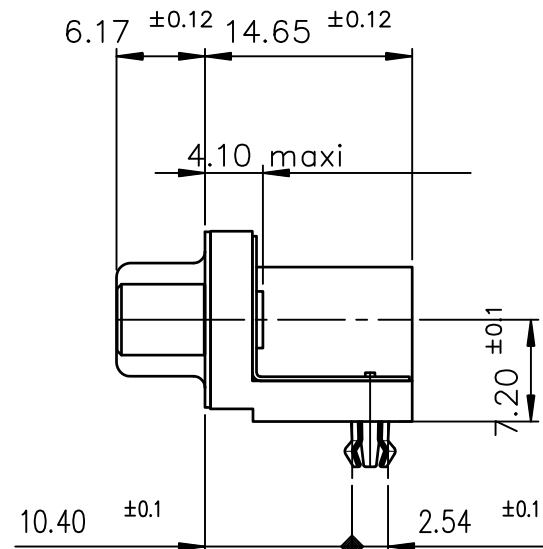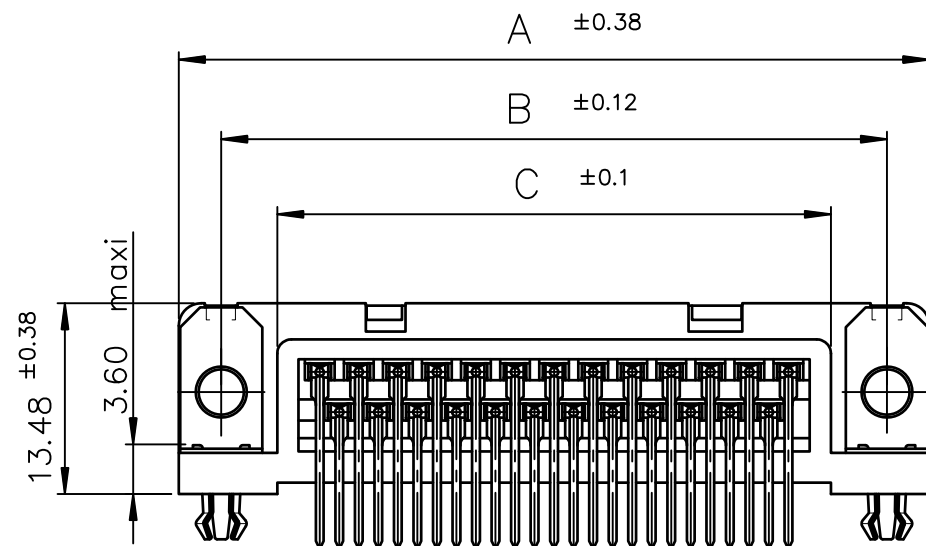

Part Number & Date Code Printing


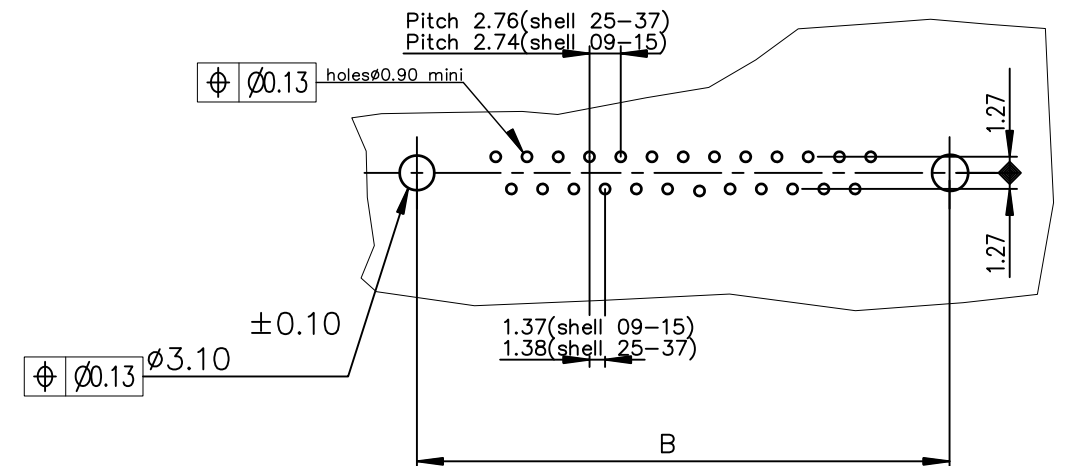
PC card drilling dimensions(after plating)
(thickness 1.60 $\pm$ 0.20mm)

SHELL	A ± 0.38	B ± 0.12	C ± 0.10	D ± 0.25	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	D09S13B4G*00**	D09S13B6G*00**
15	39.14	33.32	25.18	24.54	D15S13B4G*00**	D15S13B6G*00**
25	53.03	47.04	39.12	38.25	D25S13B4G*00**	D25S13B6G*00**
37	69.32	63.50	55.68	54.71	D37S13B4G*00**	D37S13B6G*00**
					Gold flash	0,76 » gold

LF FOR LEAD FREE

Threaded $\varnothing T$ M3 = I
Threaded $\varnothing T$ 4.40 = V

FOR ROHS DETAILS REFER DWG. NO: C01-8646-0000

mat'l. code				surface		tolerance		projection	product family		
—				ISO 1302	ISO 406	ISO 1101	D—SUB				
ltr	ecn no	dr	date	tolerances unless	otherwise specified				title		
C	I05—0124	JS	2005/07/27	angles		±0.1				SOCKET CONNECTOR DELTA—D WITH SCREWLOCK,HARPOON,METAL BRACKET	
D	I06—0074	SK	2006/06/08		linear	±0.1					
E	ELX—I-15413	MP	2013/08/03	±1°		±0.1		scale 1:1			
—	—	—	—	dr	JOHN SLEEBA	1994/08/01		dwg no		sheet 1 of 1	size
—	—	—	—	engr	MITHUN PAUL	2013/08/03		C01—8646—0292		A3	5
—	—	—	—	chr	MITHUN PAUL	2013/08/03					
—	—	—	—	appd	BIJU K PAUL	2013/08/03					
sheet index		revision sheet		E	1					CUSTOMER Drawing	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D09S13B4GV00LF](#) [D09S13B6GV00LF](#) [D15S13B4GV00LF](#) [D15S13B6GV00LF](#) [D25S13B4GV00LF](#)
[D25S13B6GV00LF](#) [D37S13B4GV00LF](#) [D37S13B6GV00LF](#) [D15S13B4GI00LF](#) [D09S13B6GI00LF](#)