

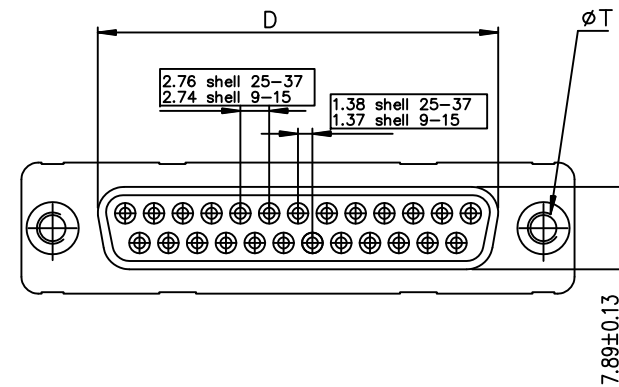
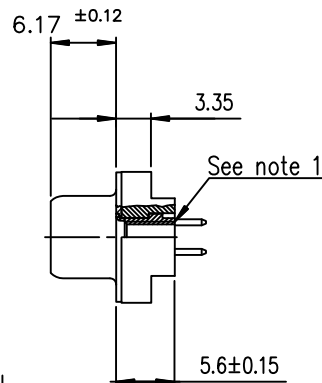
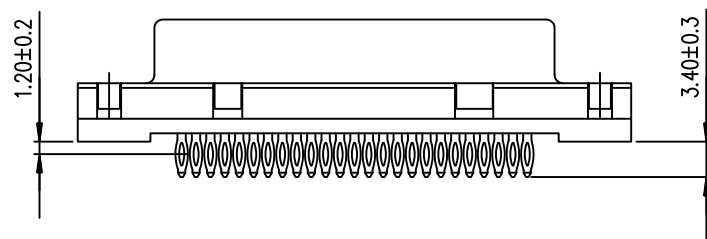


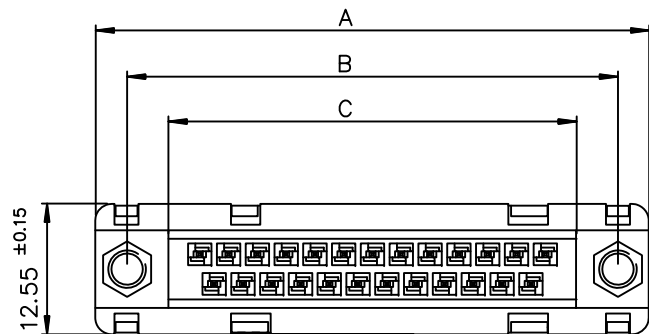

PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

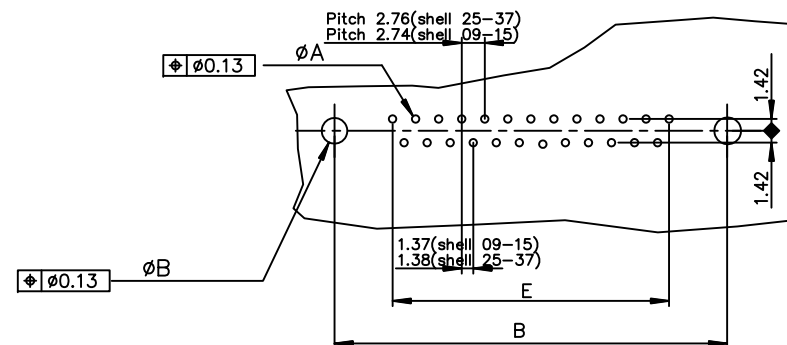

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 5.6±0.15 mm.

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	gold flash	0.76µ gold
09	30.81	24.99	16.96	16.21	10.96	D09S90C4P*00LF	D09S90C6P*00LF
15	39.14	33.32	25.18	24.54	19.18	D15S90C4P*00LF	D15S90C6P*00LF
25	53.03	47.04	39.12	38.25	33.12	D25S90C4P*00LF	D25S90C6P*00LF
37	69.32	63.50	55.68	54.71	49.68	D37S90C4P*00LF	D37S90C6P*00LF

Threaded ØT M3 = L
Threaded ØT 4.40 = X

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

mat'l. code				surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family
-				ISO 1302	✓	ISO 406	ISO 1101	ISO 1101	MM	D-SUB
ltr	ecn no	dr	date	angles	linear	.0±0.1	.00±0.1	.000±0.1	scale 2:1	title
E	ELX-I-21256	AB	2015/07/14	0°±2'						FEMALE CONNECTOR DELTA-D LOW PROFILE STRAIGHT PRESS-FIT
				dr	PESSON	1996-07-23				dwg no
				engr	ALIAS BABU	2015/07/14				sheet 1 of 1
				chr	MITHUN PAUL	2015/07/14				size
				appd	BIJU K PAUL	2015/07/14				A3
sheet index	revision	E								type
	sheet	1								Product Customer Drawing

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D09S90C6PX00LF](#) [D15S90C6PX00LF](#) [D25S90C6PX00LF](#) [D37S90C6PX00LF](#) [D09S90C6PX00](#) [D15S90C6PX00](#)
[D25S90C6PX00](#) [D37S90C6PX00](#) [D25S90C4PX00LF](#)