

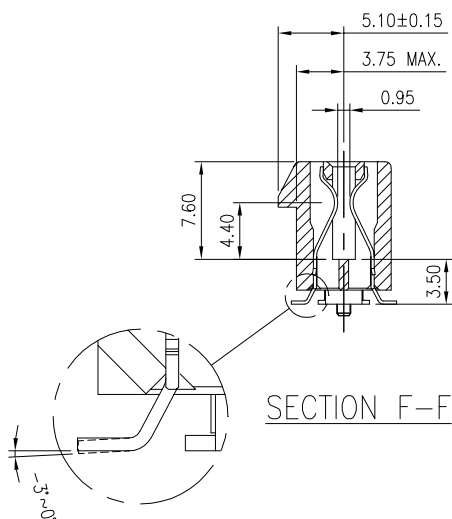


HOLD DOWN TYPE

form: A4

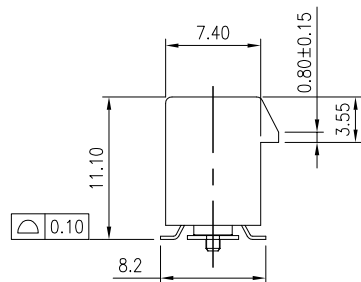

mat'l. code —				surface 58 ✓ ISO 1302				tolerance ISO 406 ISO 101				projection 				product family PCI_EXPRESS															
ltr		ecn no		dr		date		tolerances unless otherwise specified				 scale 2				title PCI_EXPRESS_CARD_EDGE_GEN3 ASSEMBLY(SMT)															
								angles																							
								linear								.X±.2															
								0°±2°								.XX±.13															
								dr				STONE_LI				2015/05/27				dwg no sheet 2 of 6 size 10061913 A4 type CUSTOMER Drawing											
								engr				STONE_LI				2015/05/27															
								chr				/				/															
								appd				PM_ZHENG				2015/05/27															
sheet index		revision sheet		P																											




RECOMMENDED PCB LAYOUT, PAD TYPE


DIMENSIONS								
POSITION	A	B $\begin{smallmatrix} +0.15 \\ -0.05 \end{smallmatrix}$	C ± 0.20	D ± 0.23	E ± 0.20	H ± 0.10	J	K ± 0.10
36	6.00	7.65	9.15	25.00	27.00	28.00	6.00	9.15
64	20.00	21.65	23.15	39.00	41.00	42.00	20.00	23.15
98	37.00	38.65	40.15	56.00	58.00	59.00	37.00	40.15
164	70.00	71.65	73.15	89.00	91.00	92.00	70.00	73.15

POSTION OF CAP

POSTION OF DUMMY CARD

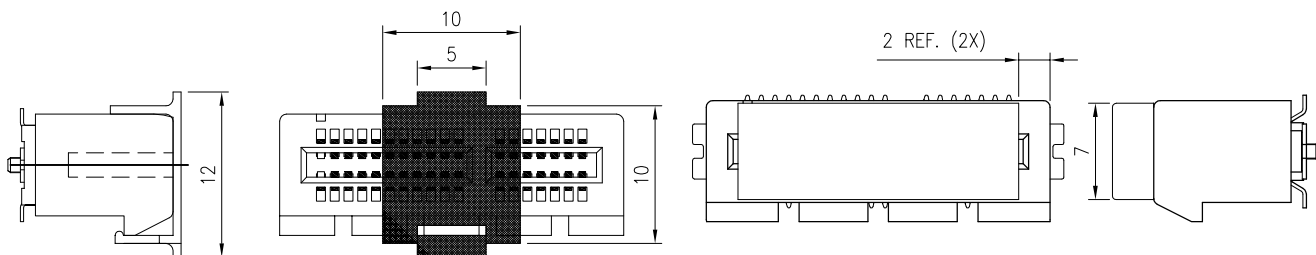

POSTION OF CUSTOMIZED CAP(30X12)

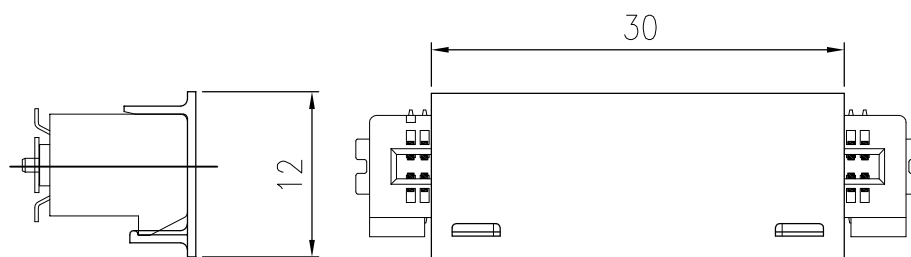

mat'l. code —				surface 58 ✓ ISO 1302		tolerance ISO 406 ISO 101		projection 		product family PCI_EXPRESS											
ltr	ecn no	dr	date	tolerances unless otherwise specified				scale 2		title PCI_EXPRESS_CARD_EDGE_GEN3 ASSEMBLY(SMT)											
				angles	linear					.X±.2											
										.XX±.13											
						0°±2°															
						dr	STONE_LI	2015/05/27			dwg no				sheet 3 of 6				size		
						engr	STONE_LI	2015/05/27			10061913				A4						
						chr	/	/													
						appd	PM_ZHENG	2015/05/27													
sheet index		revision sheet		P																	

NOTES:

1.MATERIAL:

HOUSING: NYLON, GLASS FILLED UL94V-0 RATE, SUITABLE FOR I.R SOLDERING.

TERMINAL: COPPER ALLOY

PLATING: 50u" NICKEL UNDERPLATE ALL OVER
CONTACT AREA PLATING - SEE PRODUCT NUMBER CODE
SOLDER TAIL: TIN 100u" OVER 50u" NICKEL

METAL PADS: COPPER ALLOY
FINISH: 100u" TIN OVER 50u" NICKEL

2.PRODUCT SPECIFICATION: GS-12-390

③THE HORIZONTAL AXIS FOR THE PAD PATTERN IS ESTABLISHED BY

A LINE THROUGH THE CENTER OF THE TWO Ø1.0 HOLES.

THE VERTICAL AXIS IS 90° TO THE HORIZONTAL AXIS, THROUGH THE CENTER OF DATUM $\square Z$

④NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE OF PAD FOR PINS A1.

⑤CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.


6.RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE

b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C±5°C PEAK TEMPERATURE FOR 5 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

7.A $\triangle$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH CURRENT DRAWING REVISION.

POSITION OF MYLAR

PRODUCT NUMBER CODE

10061913-X X X X L F

LEAD FREE

HOUSING COLOR OPTIONS

0-WHITE
1-BLACK

PACKAGING OPTIONS

T-TRAY PACKAGING WITHOUT CAP
C-TRAY PACKAGING WITH CAP
N-TRAY PACKAGING WITH MYLAR
G-TRAY PACKAGING WITH DUMMY CARD
V-TRAY FOR VACUUM PACKAGING
R-TAPE & REEL PACKAGING WITHOUT CAP OR MYLAR (FOR 36P & 64P ONLY)
P-TAPE & REEL PACKAGING WITH CAP (FOR 36P & 64P & 98P ONLY)
Q-TAPE & REEL PACKAGING WITH CAP (CUSTOMIZED FOR 98P ONLY)
M-TAPE & REEL PACKAGING WITH MYLAR (FOR 36P & 64P & 98P ONLY)
J-TAPE & REEL PACKAGING(24MM PITCH) WITH MYLAR (FOR 98P & 164P ONLY)
U-REEL FOR VACUUM PACKAGING
A-44MM WIDTH TAPE&REEL PACKING WITH MYLAR(FOR 36P ONLY)
Y-HARD TRAY (338x234 FOR 36P, 98P & 164P OPTION ONLY)
Z-HARD TRAY (338x234)WITH MYLAR (FOR 36P, 98P & 164P OPTION ONLY)
B-HARD TRAY (338x234)WITH CAP (FOR 36P, 98P & 164P OPTION ONLY)
H-CUSTOMIZED HARD TRAY (330x235x19.3)WITH 30mm CAP (FOR 98 & 164P ONLY)
D-SMALLER HARD TRAY WITH CHAMFER AT LEFT-BOTTOM SIDE (323x136x19) WITH 30mm CAP (FOR 164P ONLY) $\triangle$





TERMINAL PLATING OPTIONS

0-50u" Ni UNDERPLATE
30u" Au CONTACT AREA
100u" TIN TAIL AREA ----- COMPATIBLE RoHS
1-50u" Ni UNDERPLATE
15u" Au CONTACT AREA
100u" TIN TAIL AREA ----- COMPATIBLE RoHS
2-50u" Ni UNDERPLATE
GOLD FLASH CONTACT AREA
100u" TIN TAIL AREA ----- COMPATIBLE RoHS
3-50u" Ni UNDERPLATE
30u" Au CONTACT AREA
GOLD FLASH TAIL AREA ----- COMPATIBLE RoHS

POS OPTIONS

0-36
1-64
2-98
3-164

mat'l. code				surface 58	tolerance	projection	product family									
-				ISO 1302	ISO 406 ISO 101		PCI_EXPRESS									
ltr	ecn no	dr	date	tolerances unless otherwise specified			title									
				angles	linear		PCI_EXPRESS_CARD_EDGE_GEN3 ASSEMBLY(SMT)									
				0°±2°												
				dr	STONE_LI	2015/05/27										
				engr	STONE_LI	2015/05/27										
				chr	/	/										
				appd	PM_ZHENG	2015/05/27										
sheet	revision	P					dwg no									
index	sheet						10061913									
							sheet 4 of 6									
							size									
							A4									
							type									
							CUSTOMER Drawing									

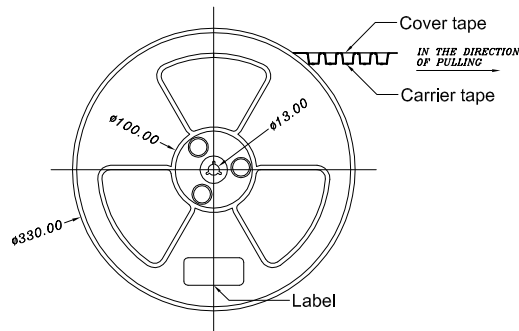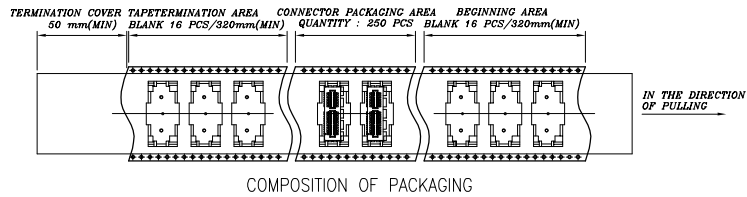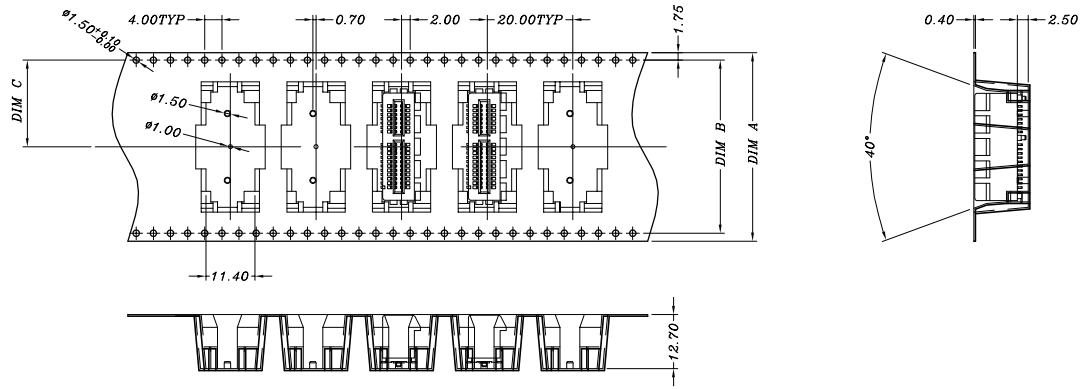

TAPE AND REEL
PACKING
RECOMMENDED FOR
36PINS ONLY

DIMENSIONS					
POSITIONS	A	B	C	D REF.	E REF.
36 (10061913-xxxALF)	44.00	40.40	20.20	44.5	50.5
36	56.00	52.60	26.30	56.4	60.4
64	56.00	52.60	26.30	56.4	60.4
98	88.00	79.60	39.80	88.4	92.4

mat'l. code				surface 58		tolerance		projection		product family											
—				ISO 1302		ISO 406 ISO 101		101		PCI_EXPRESS											
ltr	ecn no	dr	date	tolerances unless otherwise specified						MM		title									
				angles		linear		.X±.3				PCI_EXPRESS_CARD_EDGE_GEN3									
				0°±2°				.XX±.20				ASSEMBLY(SMT)									
								xxx±.10		scale 1		dwg no				sheet 5 of 6				size	
				dr		STONE_LI		2015/05/27				10061913				A4					
				engr		STONE_LI		2015/05/27													
				chr		/		/													
				appd		PM_ZHENG		2015/05/27													
sheet index		revision sheet		P																	

1 For PCI EXPRESS SMT TYPE 36P ONLY.

2. Material :

2.1 Reel :

- 2.1.1 Plastic hub : High Impact Polystyrene
- 2.1.2 Cover tape : PE
- 2.1.3 Carrier tape : ABS
- 2.2 Waterproof bag : PE
- 2.3 Desiccative : Silica Gel
- 2.4 Carton : Corrugated paper
- 2.5 Baffle : E.P.E
- 2.6 Angle paperboard : Corrugated paper


3. Dimension :

3.1 Reel :

- 3.1.1 Plastic hub : $\varnothing 330 \times T50.5$ mm
- 3.1.2 Cover tape : 5690(L) x 37.4(W) mm
- 3.1.3 Carrier tape : 5640(L) x 44(W)mm
- 3.2 Waterproof bag : 600(H) x 465(W) x 0.06(T) mm
- 3.3 Desiccative : 25 gram / Package
- 3.4 Carton : 380(L) x 380(W) x 300(H) mm
- 3.5 Baffle (1): 370(L) x 370(W) x 15(H) mm
- 3.6 Baffle (2): 355(L) x 252(W) x 15(H) mm
- 3.7 Angle paperboard : 252(H)


4. Quantity :

- 4.1 250 Pcs / Reel
- 4.2 1250 Pcs / Carton

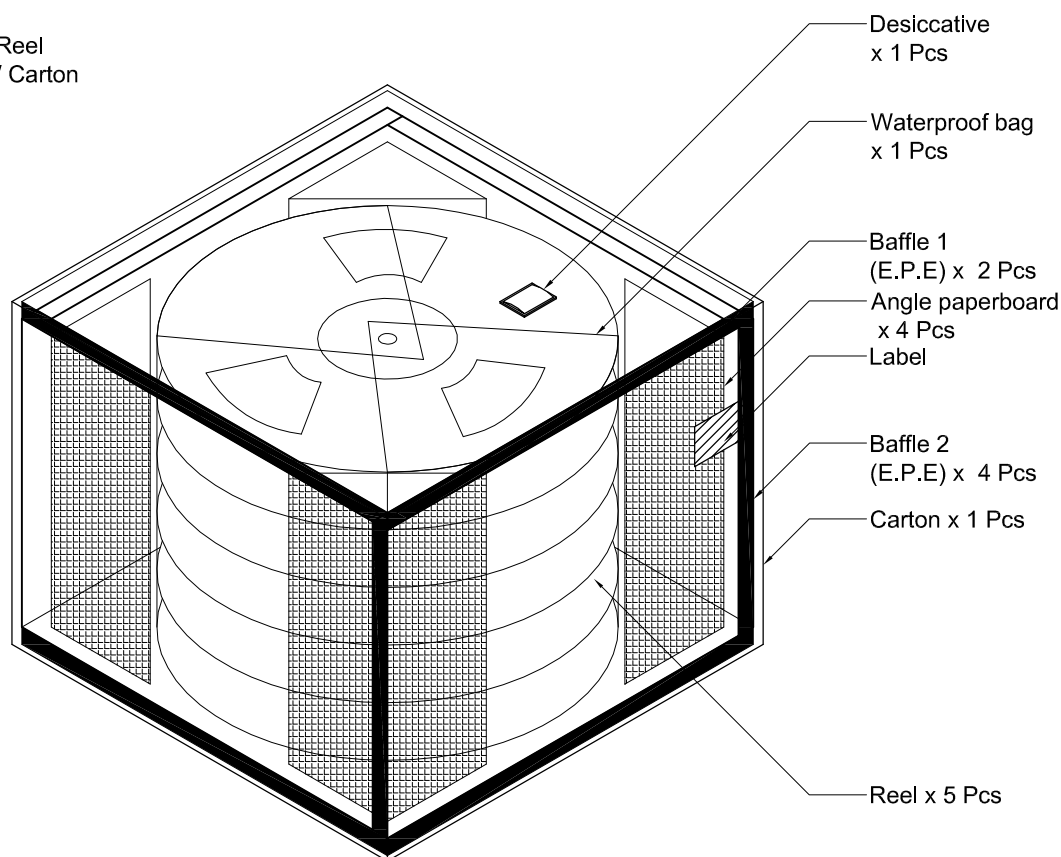

Amphenol
FCi

© 2016 AFCI

mat'l. code —				surface 58 ISO 1302 ✓			tolerance ISO 406 ISO 1101			projection 		product family PCI_EXPRESS									
ltr	ecn no	dr	date	tolerances unless otherwise specified					title												
				angles	linear	.X±.3			PCI_EXPRESS_CARD_EDGE_GEN3 ASSEMBLY(SMT)												
				0°±2°		.XX±.20 XXX±.10															
				dr	STONE_LI	2015/05/27				dwg no				sheet 6 of 6				size			
				engr	STONE_LI	2015/05/27				10061913				A4							
				chr	/	/															
				appd	PM_ZHENG	2015/05/27				type CUSTOMER Drawing											
sheet index		revision		P																	
		sheet																			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol:

[10061913-100CLF](#) [10061913-100RLF](#) [10061913-100TLF](#) [10061913-101CLF](#) [10061913-101TLF](#) [10061913-102CLF](#)
[10061913-102TLF](#) [10061913-100PLF](#) [10061913-100MLF](#) [10061913-101PLF](#) [10061913-101RLF](#) [10061913-102NLF](#)
[10061913-110PLF](#) [10061913-110TLF](#) [10061913-111CLF](#) [10061913-111PLF](#) [10061913-111RLF](#) [10061913-111TLF](#)
[10061913-112CLF](#) [10061913-112TLF](#) [10061913-113TLF](#) [10061913-120TLF](#) [10061913-122CLF](#) [10061913-122TLF](#)
[10061913-123TLF](#) [10061913-113CLF](#) [10061913-110RLF](#) [10061913-103TLF](#) [10061913-103CLF](#) [10061913-103YLF](#)
[10061913-121CLF](#) [10061913-100NLF](#) [10061913-102PLF](#) [10061913-121PLF](#) [10061913-003CLF](#) [10061913-132CLF](#)
[10061913-103BLF](#) [10061913-003ZLF](#) [10061913-112PLF](#) [10061913-113NLF](#) [10061913-113BLF](#) [10061913-131CLF](#)
[10061913-120PLF](#) [10061913-112NLF](#) [10061913-133CLF](#) [10061913-103NLF](#) [10061913-120MLF](#) [10061913-](#)
[110MLF](#) [10061913110ML](#) [10061913110RL](#) [10061913-120RLF](#) [10061913-103ZLF](#) [10061913-121MLF](#) [10061913-](#)
[100ALF](#) [10061913-122PLF](#) [10061913-123CLF](#) [10061913-103HLF](#) [10061913-113ZLF](#) [10061913-102HLF](#) [10061913-](#)
[110ALF](#) [10061913-113DLF](#) [10061913-102ZLF](#) [10061913-111MLF](#) [10061913-001PLF](#) [10061913-102BLF](#) [10061913-](#)
[103JLF](#) [10061913-112QLF](#) [10061913-132MLF](#) [10061913-113PLF](#) [10061913-103DLF](#) [10061913-110CLF](#) [10061913-](#)
[102SLF](#)