
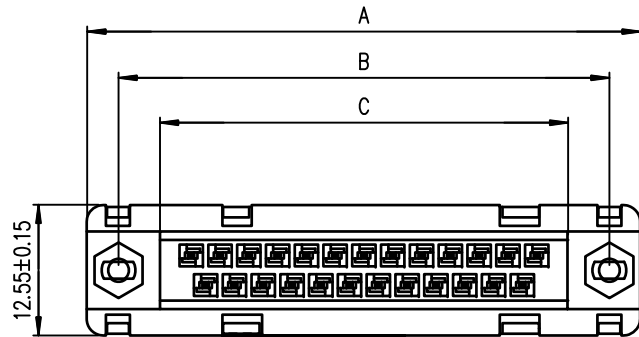


PC board drilling dimensions (after plating)

(thickness ≤ 3.20±0.30mm)

Pitch 2.76(shell 25-37)
pitch 2.74(shell 09-15)

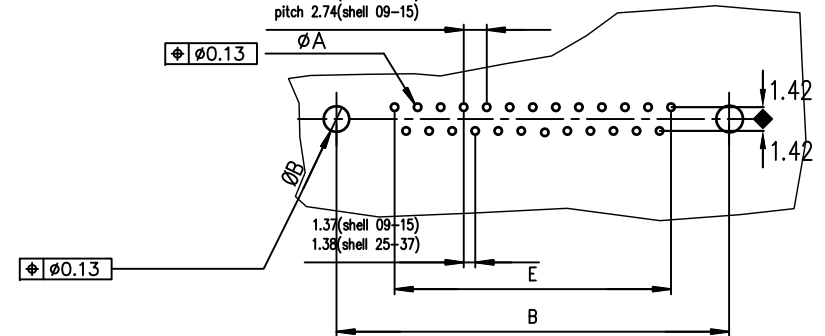

ROHS PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	200 Matings	500 Matings
09	30.81	24.99	16.96	16.21	10.96	D09S91C4GX00LF	D09S91C6GX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S91C4GX00LF	D15S91C6GX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S91C4GX00LF	D25S91C6GX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S91C4GX00LF	D37S91C6GX00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATION:
SEE DRAWING C01-8646-0001

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family D-SUB			
ltr	ecn no	dr	date	tolerances unless otherwise specified				 mm scale 2:1		title			
K	ELX-I-21654	AB	2015-10-26	angles linear		.0±0.1				FEMALE DELTA-D STRAIGHT PRESS FIT			
L	ELX-I-24020	AAB	2016-06-06			.00±0.1							
						.000±0.1							
				dr	PESSON	1993-03-18	Amphenol FCi		dwg no		sheet 1 of 1	size	
				engr	MITHUN PAUL	2016-06-06			C01-8646-0142		A3		
				chr	ATHUL A.B	2016-06-06							
				appd	BIJU K PAUL	2016-06-06							
sheet index	revision sheet	L	1										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D09S91C4GX00LF](#) [D09S91C6GX00LF](#) [D15S91C4GX00LF](#) [D25S91C4GX00LF](#) [D37S91C4GX00LF](#)