
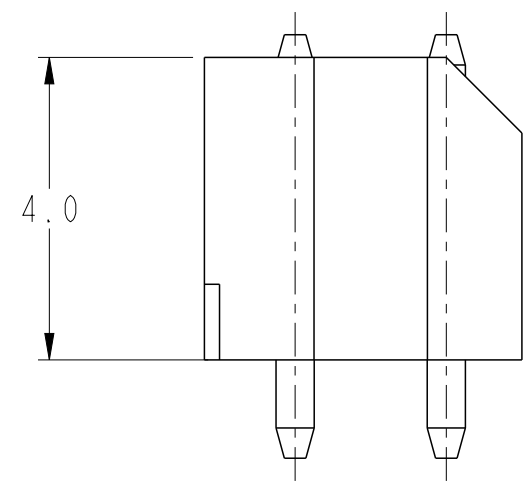
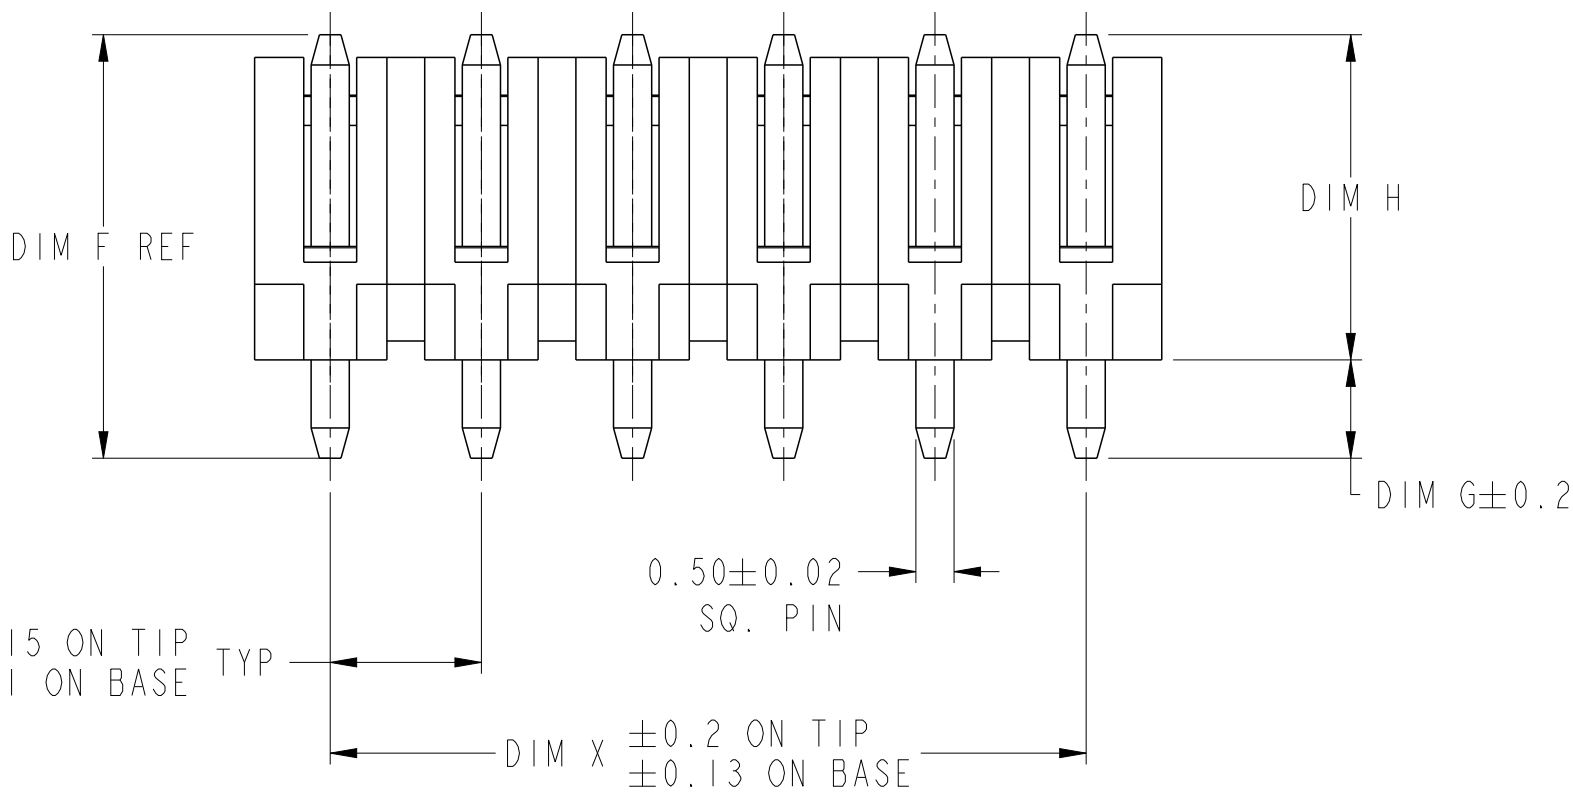
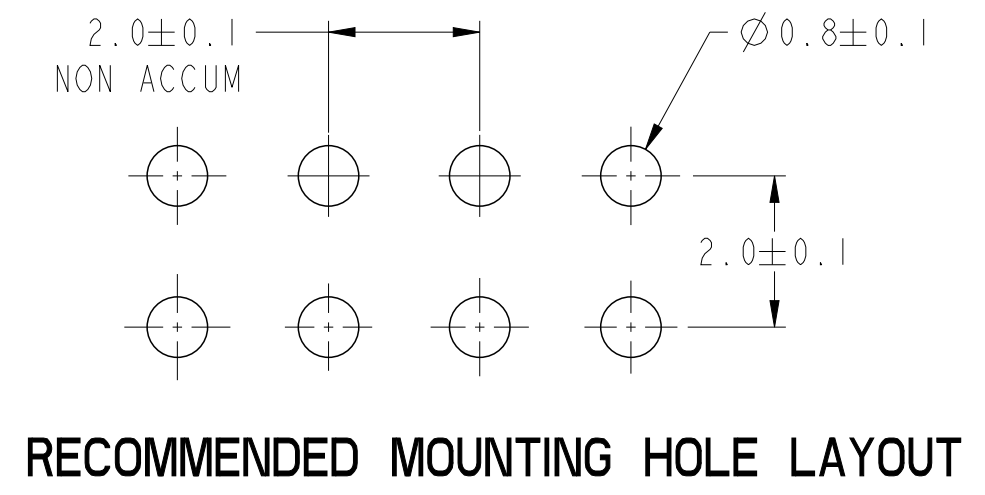


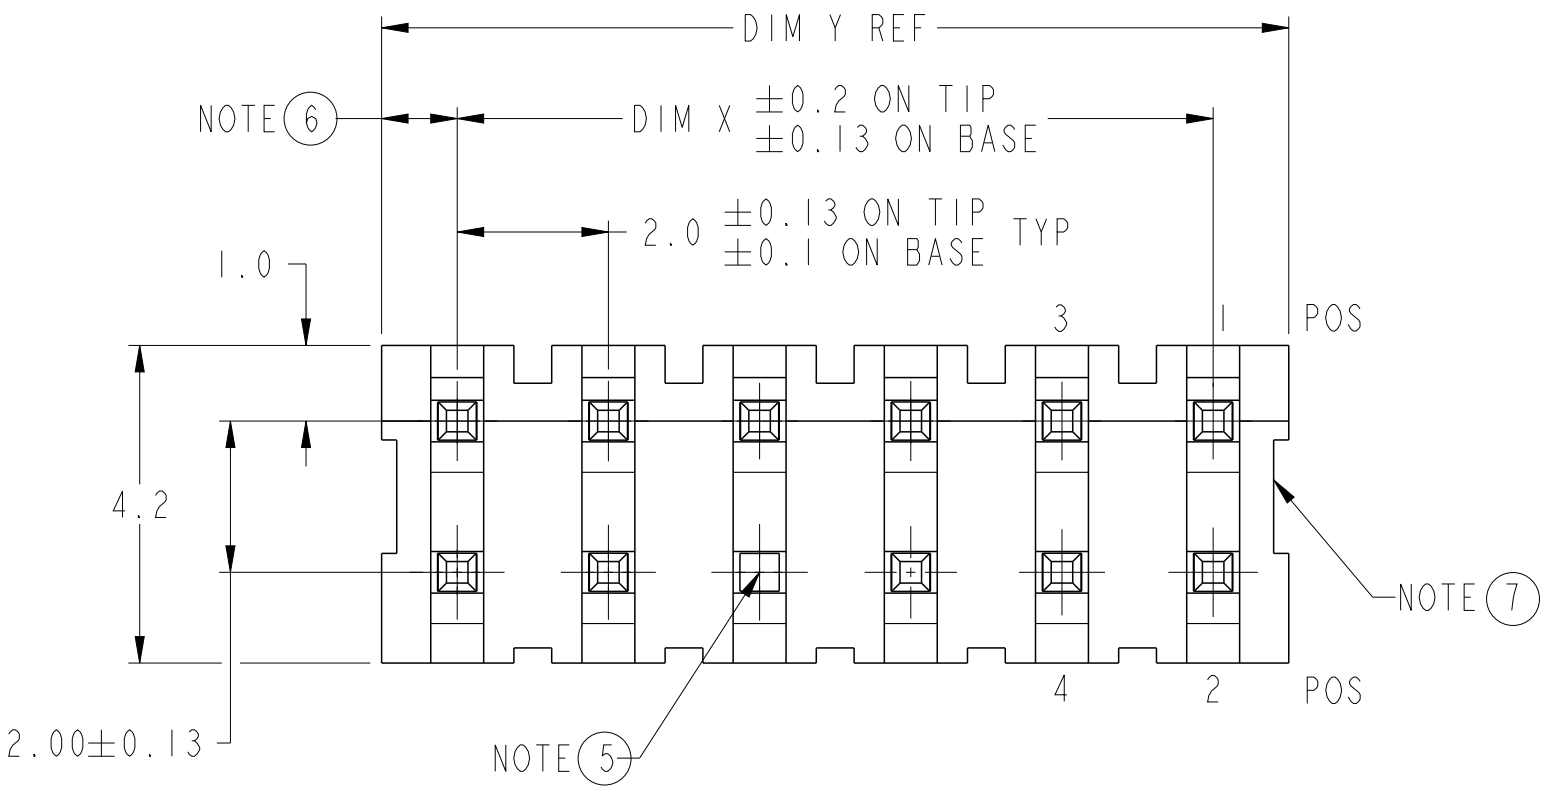

spec ref	-	dr	Andrew Yong	2010/10/21	projection	MM	size	A3	scale	9:1
tolerance std	ISO 406 ISO 1101	eng	Guo-Min Sun	2013/09/09	chr	-	ecn no	ELX-N-15787-1	rel level	Released
surface	ISO 1302	appr	Rick Bian	2013/09/09	product family	-	dwg no	87139	rev	AV
TOLERANCES UNLESS OTHERWISE SPECIFIED		FCI		MINITEK II		2.0MM HOLDING HEADER		Product - Customer Drw		sheet 1 of 4
linear		0.X	± 0.50	www.fci.com		cat. no.	-	PDS: Rev :AV		STATUS:Released
angular		0.XX	± 0.25							Printed: Sep 09, 2013
		0.XXX	± 0.15							
		0°	$\pm 3^\circ$							


1		2					3	4
PRODUCT NO	POS	DIM F	DIM G	DIM H	DIM X	DIM Y	POL. POS	
87139-X01	2 X 6	5.6	1.3	4.3	10	12	-	
-X02	2 X 8	5.6	1.3	4.3	14	16	-	
-X03	2 X 9	5.6	1.3	4.3	16	18	-	
-X04	2 X 9	6.3	2.0	4.3	16	18	-	
-X05	2 X 6	6.3	2.0	4.3	10	12	-	
-X06	2 X 3	6.3	2.0	4.3	4	6	-	
-X07	2 X 5	6.3	2.0	4.3	8	10	-	
-X08	2 X 10	6.3	2.0	4.3	18	20	-	
-X09	2 X 1	OBSOLETED						
-X10	2 X 8	6.3	2.0	4.3	14	16	-	
-X11	2 X 4	6.3	2.0	4.3	6	8	-	
-X12	2 X 6	6.0	2.5	3.5	10	12	-	
-X13	2 X 10	6.5	2.5	4.0	18	20	-	
-X14	2 X 2	6.5	2.5	4.0	2	4	-	
-X15	2 X 2	5.0	1.5	3.5	2	4	-	
-X16	2 X 2	6.3	2.0	4.3	2	4	4	
-X17	2 X 2	6.3	2.0	4.3	2	4	3, 4	
-X18	2 X 2	5.0	1.5	3.5	2	4	3, 4	
-X19	2 X 2	6.2	2.7	3.5	2	4	-	
-X20	2 X 4	6.5	2.5	4.0	6	8	-	
-X21	2 X 5	6.5	2.5	4.0	8	10	-	
-X22	2 X 3	5.0	1.5	3.5	4	6	-	
-X23	2 X 7	5.8	2.5	3.3	12	14	-	
-X24	2 X 2	6.3	2.0	4.3	2	4	-	
-X25	2 X 8	5.8	2.5	3.3	14	16	-	

NOTES:

- MATERIAL:
BODY : G.F NYLON UL94V-0 BLACK
PIN : PHOSPHOR BRONZE
- TOLERANCE UNLESS OTHERWISE NOTED ± 0.25
- HEADER BODY TO BE REMOVED AFTER SOLDERING
- PIN TO HOUSING RETENTION FORCE 200 gm MAX.
PER PIN AFTER SUBJECTION TO SOLDER TEMPERATURE
AT 260°C FOR 5 sec.
- POLARISED BY OMISSION OF PINS.REFER TO TABLE
FOR POL. POS
- DIM 1.0 APPLIES TO MOLDED SIDE(S) ONLY. IF
SIDE(S) ARE SAW, DIM 0.5 MIN APPLIES.
- RECESS APPLIES TO MOLDED SIDE(S) ONLY.
- PRODUCT DESCRIPTION CODE :

XXXXX-XXXLF
LEAD FREE (SEE NOTES 9 & 11)
TERMINAL PLATING
BASE NUMBER

- P/N:87139-XXXLF IS SAME AS P/N:87139-XXX. THE SUFFIX 'LF' IS ADDED JUST FOR EASY LEAD FREE IDENTIFICATION
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57MM MINIMUM THICK CIRCUIT BOARD.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

dr	Andrew Yong	2010/10/21	projection 	MM 	size	A3	scale	9:1	
eng	Guo-Min Sun	2013/09/09			ecn no				ELX-N-15787-1
chr	-	-			rel level				Released
appr	Rick Bian	2013/09/09	product family		-				
			title			MINITEK II		rev	
			2.0MM HOLDING HEADER			87139			
www.fci.com			cat. no.		-	Product - Customer Drw		sheet 2 of 4	

1				2				3				4	
PRODUCT NO	POS	DIM F	DIM G	DIM H	DIM X	DIM Y	POL. POS		PLATING	DESCRIPTION			
87139-X26	2 X 4	5.0	1.5	3.5	6	8	-		0	0.2um Au			
-X27	2 X 3	5.6	2.1	3.5	4	6	-		1	0.76um Au			
-X28	2 X 4	5.6	2.1	3.5	6	8	-		2	UNASSINGED			
-X29	2 X 2	5.6	2.1	3.5	2	4	-		3	0.38um Au			
-X30	2 X 5	5.6	2.1	3.5	8	10	-		4	UNASSINGED			
-X31	2 X 2	5.6	2.1	3.5	2	4	2, 4		5	0.38um GXT			
-X32	2 X 5	6.3	2.0	4.3	8	10	3		6	0.76um GXT			
-X33	2 X 8	5.6	2.3	3.3	14	16	-						
-X34	2 X 2	6.2	2.5	3.7	2	4	-						
-X35	2 X 4	6.2	2.5	3.7	6	8	-						
-X36	2 X 4	6.2	2.5	3.7	6	8	2, 3, 4, 6, 8						
-X37	2 X 2	6.2	2.5	3.7	2	4	1, 2, 4						
-X38	2 X 7	6.2	2.5	3.7	12	14	11, 12, 13						
-X39	2 X 2	3.5	1.5	2.0	2	4	-						
-X40	2 X 5	4.3	1.8	2.5	8	10	-						
-X41	2 X 8	6.0	1.7	4.3	14	16	-						
-X42	2 X 6	6.0	1.7	4.3	10	12	1, 3, 5, 7, 9, 11						
-X43	2 X 10	4.0	2.0	2.0	18	20	-						
-X44	2 X 2	4.4	1.5	2.9	2	4	-						
-X45	2 X 2	4.4	1.5	2.9	2	4	3, 4						
-X46	2 X 10	4.5	2.5	2.0	18	20	-						
-X47	2 X 3	3.5	1.5	2.0	4	6	-						
-X48	2 X 2	3.27	1.27	2.0	2	4	-						
-X49	2 X 3	3.27	1.27	2.0	4	6	-						
-X50	2 X 7	5.6	2.3	3.3	12	14	-						



Copyright FCI.

A

B

C

D

A

B

C

D

PRODUCT NO	POS	DIM F	DIM G	DIM H	DIM X	DIM Y	POL. POS
87139-X51	2 X 8	5.6	2.3	3.3	14	16	-
-X52	2 X 10	6.3	2.0	4.3	18	20	1,3,5,7,8,9,11, 13,15,17,19
-X53	2 X 9	5.1	1.6	3.5	16	18	7,8
-X54	2 X 6	3.27	1.27	2.0	10	12	-
-X55	2 X 9	5.0	1.5	3.5	16	18	13
-X56	2 X 3	4.7	1.2	3.5	4	6	-
-X57	2 X 7	5.6	1.3	4.3	12	14	-
-X58	2 X 2	8.0	2.5	5.5	2	4	-
-X59	2 X 6	6.5	2.5	4.0	10	12	-
-X60	2 X 7	6.5	2.5	4.0	12	14	-
-X61	2 X 3	6.0	2.5	3.5	4	6	-
-X62	2 X 4	6.0	2.5	3.5	6	8	-
-X63	2 X 2	6.0	2.5	3.5	2	4	-

spec ref -				dr Andrew Yong		2010/10/21		projection		MM		size A3		scale 9:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Guo-Min Sun		2013/09/09				ecn no ELX-N-15787-1					
ISO 406						chr -		-									
ISO 1101						appr Rick Bian		2013/09/09		product family -		rel level Released					
surface		linear		0.X ±0.50		0.XX ±0.25		0.XXX ±0.15				title MINITEK II		dwg no 87139		rev AV	
ISO 1302		angular		0° ±3°		www.fci.com		cat. no. -		Product - Customer Drw				sheet 4 of 4			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol:

[87139-006](#) [87139-007](#) [87139-013](#) [87139-014](#) [87139-020](#) [87139-114](#) [87139-120](#) [87139-158](#) [87139-321](#) [87139-506](#) [87139-513](#) [87139-514](#) [87139-006LF](#) [87139-007LF](#) [87139-013LF](#) [87139-014LF](#) [87139-020LF](#) [87139-114LF](#) [87139-120LF](#) [87139-158LF](#) [87139-321LF](#) [87139-506LF](#) [87139-513LF](#) [87139-514LF](#) [87139-060](#) [87139-510LF](#) [87139-511LF](#) [87139-062LF](#) [87139-063LF](#) [87139-061LF](#) [87139-520LF](#)