



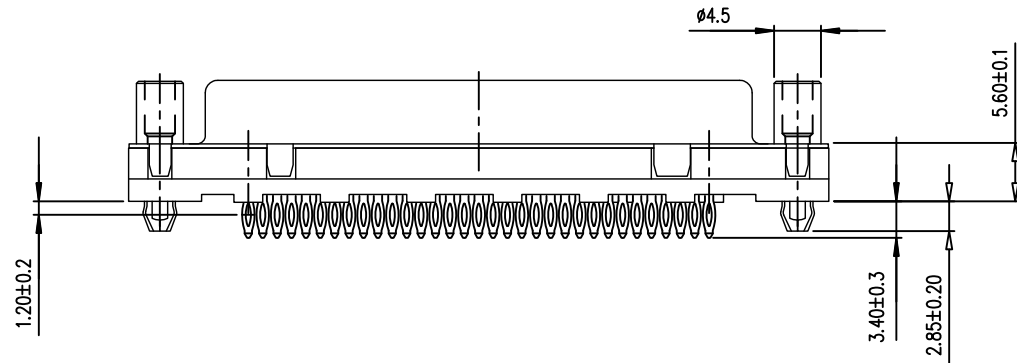


PART NUMBER	
flash gold	D50S90C4GV00LF
0.76s gold	D50S90C6GV00LF


GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

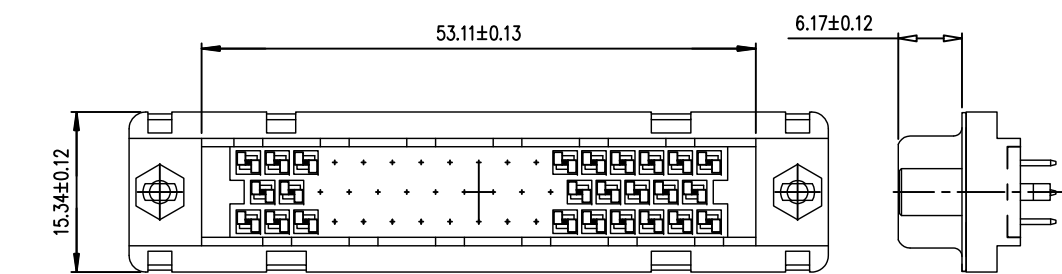

thread. UNC4-40x2

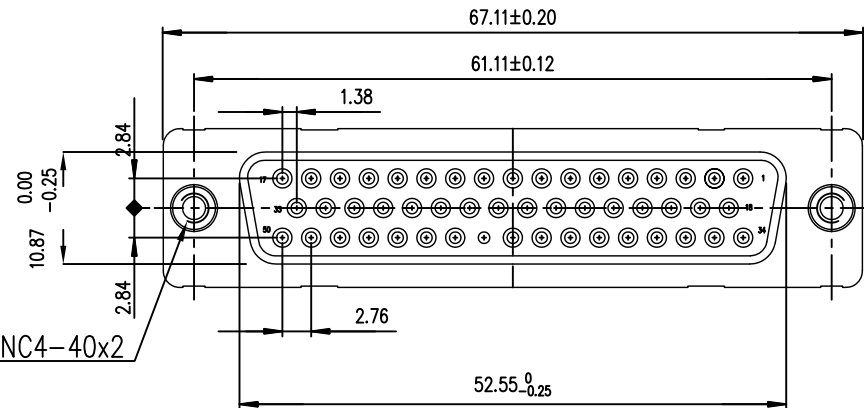

PC board drilling dimensions
(after plating - thickness: 1.60 mm)

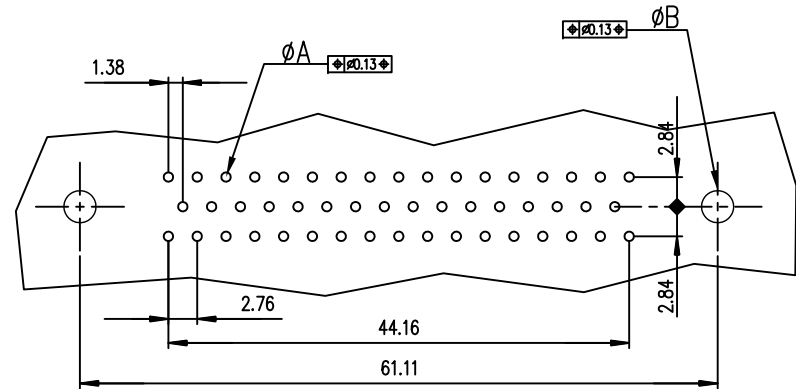

Part number	SEE TABLE
-------------	-----------

mat'l. code				surface  tolerance		projection 		product family						
				ISO 1302 ISO 406 ISO 1101				D-SUB						
ltr	ecn no	dr	date	tolerances unless otherwise specified				title						
D	-	MLE	1996-07-25	angles	linear	.0±0.1				FEMALE CONNECTOR DELTA D 50-LOW PROFILE STRAIGHT PRESS FIT,FEMALE 4-40 SCREW				
E	LS06-0140	LGO	2006-09-25			.00±0.1								
F	ELX-I-24020	AAB	2016-06-06			.000±0.1								
				0°±2°		.000±0.1		scale 2:1						
				dr		LENOIR		1994-06-24		dwg no		sheet 1 of 1		size
				engr		MITHUN PAUL		2016-06-06		Amphenol FCi		C01-8646-0259		A3
				chr		ATHUL A.B		2016-06-06						
				appd		BIJU K PAUL		2016-06-06						
sheet index		revision		F	type Product Customer Drawing									
		sheet		1										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D50S90C6GV00LF](#) [D50S90C6GV00](#) [D50S90C4GV00LF](#)