
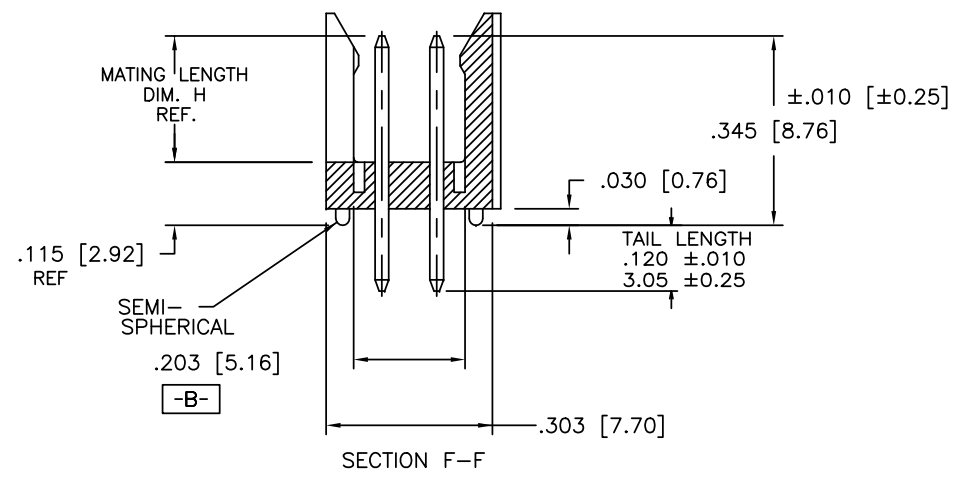



PRODUCT NUMBER
69168-XYZHLF

- LEAD FREE OPTION
SEE NOTE 7, 8, 9
- CUSTOMER SPECIALS
SEE NOTE 6
- NO. OF POS.
SEE TABLE
- PIN PLATING
SEE TABLE
- BASE P/N

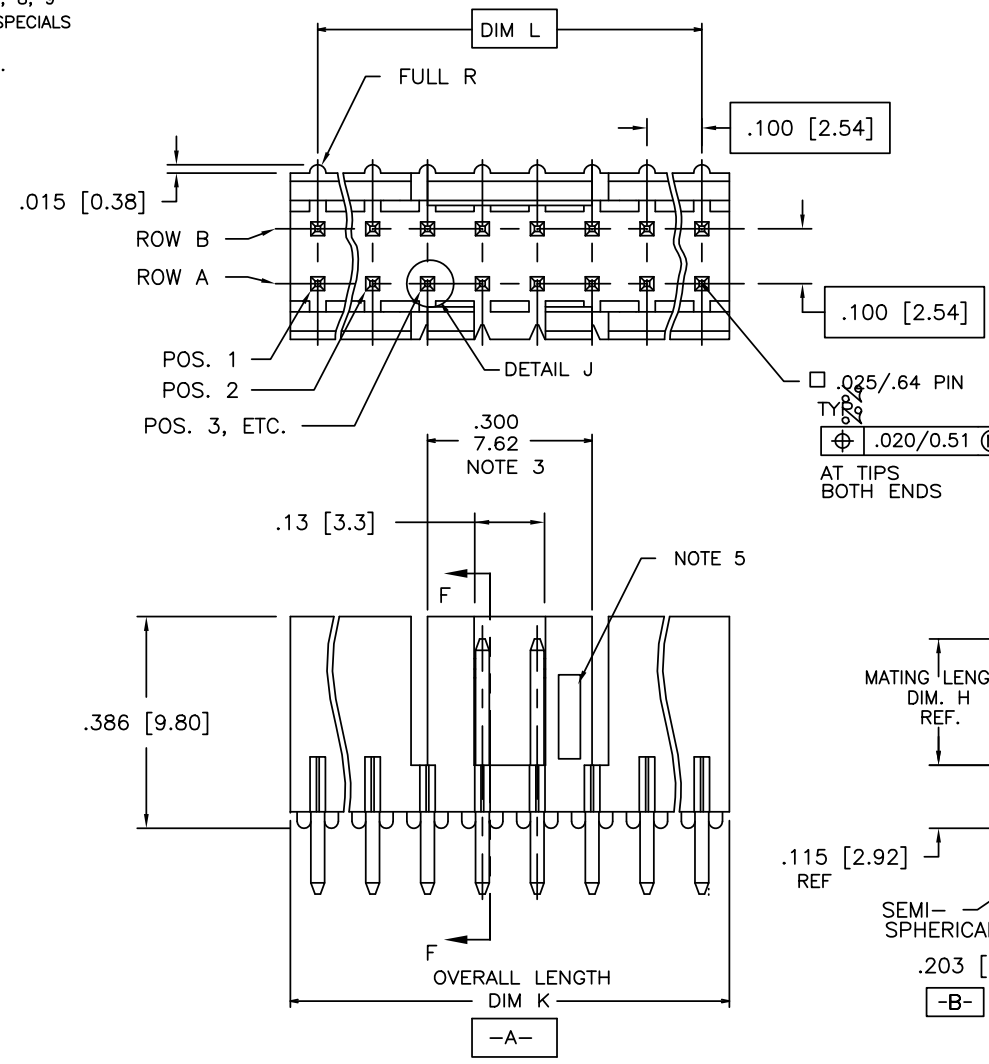

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection ISO 1101		product family HEADER	
l	tr	ec	n	dr	date	tolerances unless otherwise specified		title	
M	ELX-N-011899	JZ	2012-05-31			angles	linear	FRICION LATCH HEADER DOUBLE ROW VERTICAL	
G	V03-0352	GJP	03/25/03	0'±2'				dwg no 69168	
H	M05-0134	ERE	06/15/05	dr	L.SADERS	5/3/95		sheet of 2	
J	M06-0256	MHT	9/07/06	engr	L.FYE	5/3/95		size A3	
K	M08-0023	MHT	1/28/08	chr	T.BREWBAKER	5/3/95			
L	M08-0291	MHT	10/06/08	appd	L.FYE	5/3/95		type Product Customer Drawing	
sheet	revision	M	M						
index	sheet	1	2						

PRODUCT NUMBER	NO.OF POS.	MATING LENGTH DIM H	OVERALL LENGTH DIM K	DIM L	NOTES
69168-X06	2 X 3	0.230/5.84	0.300/7.62	0.200/5.08	
-X08	2 X 4	0.230/5.84	0.400/10.16	0.300/7.62	
-X08A	2 X 4	0.210/5.33	0.400/10.16	0.300/7.62	NOTE 6
-X10	2 X 5	0.230/5.84	0.500/12.70	0.400/10.16	
-X10A	2 X 5	0.210/5.33	0.500/12.70	0.400/10.16	NOTE 6
-X12	2 X 6	0.230/5.84	0.600/15.24	0.500/12.70	
-X14	2 X 7	0.230/5.84	0.700/17.78	0.600/15.24	
-X16	2 X 8	0.230/5.84	0.800/20.32	0.700/17.78	
-X16A	2 X 8	0.210/5.33	0.800/20.32	0.700/17.78	NOTE 6
-X18	2 X 9	0.230/5.84	0.900/22.86	0.800/20.32	
-X18A	2 X 9	0.210/5.33	0.900/22.86	0.800/20.32	NOTE 6
-X20	2 X 10	0.230/5.84	1.000/25.40	0.900/22.86	
-X22	2 X 11	0.230/5.84	1.100/27.94	1.000/25.40	
-X24	2 X 12	0.230/5.84	1.200/30.48	1.100/27.94	
-X26	2 X 13	0.230/5.84	1.300/33.02	1.200/30.48	
-X28	2 X 14	0.230/5.84	1.400/35.56	1.300/33.02	
69168-X30	2 X 15	0.230/5.84	1.500/38.10	1.400/35.56	

NOTES:

1. MOLDING MAT'L: GLASS REINFORCED PCT, COLOR: BLACK
FLAME RETARDANT PER 'UL 94 V-0
MAXIMUM OPERATING TEMPERATURE: 130° C
OR
MINERAL FILLED LCP, COLOR BLACK
FLAME RETARDANT PER UL 94 V-0

2. PIN MATERIAL: 3/4 HD PHOS. BRZ.

3. NO SLOTS ON 2 X 5 POSITION OR SMALLER
PRODUCT. THE CENTER KEY SLOT WILL BE ON
ALL HEADERS REGARDLESS OF SIZE.

4. TWO NON-CRITICAL SIDES OF PIN TIP
NOT PLATED, BOTH ENDS.

5. COMPANY LOGO MAY APPEAR IN THIS AREA.

6. CUSTOMER SPECIAL -- "A" SUFFIX INDICATES
0.210/5.33 MATING LENGTH.

7. ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR
LEAD FREE OPTION, NOT AVAILABLE FOR -5YY, -5YYH,
-6YY & -6YYH.

8. PART NUMBERS WITH "H" SUFFIX WILL WITHSTAND
EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS
IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER
PROCESS.

PART NUMBERS WITHOUT "H" SUFFIX WILL WITHSTAND
EXPOSURE TO 260°C PEAK TEMPERATURE FOR WAVE
SOLDER PROCESS.

9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

10. PLATING OPTIONS:
PERFORMANCE PLATING WILL BE EITHER GOLD OR GXT ON CONTACT OR TAIL,
OPTIONALLY (78~295u"/2~7.5u) TIN ON TAIL.

11. "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE
AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL
INTERCONNECT ENVIRONMENTS."

PIN PLATING CODES	
-1YY	30u"/.76u (SEE NOTE 10) 50u"/1.27u Ni
-2YY	15u/.38u (SEE NOTE 10) 50u"/1.27u Ni
-3YY	50u"/1.27u (SEE NOTE 10) 50u"/1.27u Ni
-4YY	100u"/2.54u MIN Sn 50u"/1.27u Ni (SEE NOTE 11)
-4YYHLF	
-5YY	15u"/.38u (SEE NOTE 10) 50u"/1.27u Ni
-6YY	30u"/.76u (SEE NOTE 10) 50u"/1.27u Ni
-7YY	30u"/.76u (SEE NOTE 10) OVER 50u"/1.27u Ni
-8YY	15u"/.38u (SEE NOTE 10) OVER 50u"/1.27u Ni

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection INCH/MM		product family HEADER	
ltr ecn nldr date		tolerances unless otherwise specified		angles		line		title	
M				0°±2'		scale 3:1		FRICTION LATCH HEADER DOUBLE ROW VERTICAL	
		dr L.SADERS 5/3/95		engr L.FYE 5/3/95		chr T.BREWBAKER 5/3/95		dwg no 69168	
		appd L.FYE 5/3/95						sheet 2 of 2 size A3	
sheet index		revision sheet						type Product Customer Drawing	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[69168-128](#) [69168-408](#) [69168-206](#) [69168-208](#) [69168-210](#) [69168-212](#) [69168-214](#) [69168-216](#) [69168-218](#) [69168-220](#) [69168-222](#) [69168-224](#) [69168-226](#) [69168-228](#) [69168-230](#) [69168-306](#) [69168-310](#) [69168-314](#) [69168-316](#) [69168-320](#) [69168-330](#) [69168-410](#) [69168-412](#) [69168-414](#) [69168-416](#) [69168-422](#) [69168-608](#) [69168-610](#) [69168-612](#) [69168-108A](#) [69168-110A](#) [69168-306HLF](#) [69168-310HLF](#) [69168-314HLF](#) [69168-316HLF](#) [69168-320HLF](#) [69168-330HLF](#) [69168-118](#)