

REFERENCE SPECIFICATIONS

- DIN 41652 PART 2
- DRAFT IEC 352-5
- IEC-512 (TESTS PROCEDURE)

PHYSICAL CHARACTERISTICS

- INSULATOR MATERIAL:
- PBT COLOR BLACK-RAL 7001/STANDARD MATERIAL
- CONTACT MATERIAL: - PHOSPHOR BRONZE
- GROUNDING DEVICE MATERIAL: - BRASS
- ACCESSORIES: BRASS

ELECTRICAL CHARACTERISTICS

- MAXIMUM RATING CURRENT: 5A AT 20°C / 2.5A AT 70°C
- NOMINAL CURRENT: 5A (STANDARD CONDITIONS)
- CONTACT RESISTANCE: straight terminations: <10mΩ
- Right angled termination: <25mΩ for 9 to 37 way
- : <35mΩ for 50 way
- VOLTAGE PROOF: >1000 V.r.m.s.
- RATED VOLTAGE: 300 V.r.m.s.
- insulation resistance: >5000mΩ
- creepage and clearance distance: >1mm
- average wiping length: 2mm

MECHANICAL CHARACTERISTICS

- RETENTION AGAINST TORQUE: - Threaded insert: 0.7 N.m minimum
- Female screw lock: 0.5 N.m minimum
- INSERTION AND WITH DRAWAL FORCE: <n x 3.40 N (n number of cts)
- GAUGE RETENTION FORCE: >0.20 N (gauge PM)
- THICKNESS GAUGE = Ø0.99±0.005 / SURFACE ROUGHNESS:
- Ra=0.10µ mini- 0.25µ maxi
- CONTACT RETENTION IN INSULATOR: mini 16N for straight contact
- mini 20N for right angled contact
- VIBRATIONS: 10-2000Hz / 1.5 mm - 20g / 3 x 2 HRS
- INTERRUPTION <1µs (NOT APPLICABLE FOR PL3)
- SHOCK: ACC. HALF SINE 50g- 11m.s-6x3 SHOCKS
- INTERRUPTION <1µs

PERFORMANCE LEVELS

MECHANICAL ENDURANCE ONLY			MECHANICAL ENDURANCE AND INDUSTRIAL ATMOSPHERE TEST(I)		
P/N:DXXXXXCXXXXXX	PERFORMANCE LEVELS		P/N: DXXXXXCXXXXXX	PERFORMANCE LEVELS	
4	200 OPERATIONS	PL3	4	salt spray: 24 hours	PL3
6	400 OPERATIONS	PL1	6	250 op + test (1 or 2)-10 days + 250 op	PL1

1)INDUSTRIAL ATMOSPHERE TEST: 3 GASES available for contacts and grounding device

IN ACCORDANCE WITH IEC-68-2-60-TTD - TEST ke - MTH C OR IEC 512-6 TEST IIg

MIXED GASES: H2S=10 PPB±5.10-9vol/vol +N2O=200±50.10-9 vol/vol + CL2=10±5.10-9vol/vol

TEMPERATURE = 30±1°C / RELATIVE HUMIDITY= 70±3°C

(2)INDUSTRIAL ATMOSPHERE TEST: 4 GASES available for contacts active area only

BELCORE TEST : MIXED GASES: H2S=10 PPB±5 vol/vol +N2O=200ppb±50 vol/vol + CL2 =10ppb±3vol/vol + S2O=100ppb±30vol/vol

TEMPERATURE = 30±1°C / RELATIVE HUMIDITY= 70±2°C

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/56
TEMPERATURE RANGE -55°C TO +125°C
DAMP HEAT STEADY STATE 56 DAYS

METALLIZED HOLE DIMENSION

P.C.B. HOLE DEFINITION (NOTE -1 AND -2)	HOLE PRESS-FIT CONTACT SnPb ØA	HOLE PRESS-FIT CONTACT Sn ØB	HOLE PRESS-FIT HARPOONS SnPb ØB	HOLE PRESS-FIT HARPOONS Sn ØA
DRILL DIAMETER	Ø 1.15 REF (NOTE -3)	Ø 1.15 REF (NOTE -3)	Ø 3.22 REF (note-3)	Ø 3.22 REF (note-3)
DRILLED HOLE	Ø 1.12 -1.18	Ø 1.12 -1.18	Ø 3.19-3.25	Ø 3.19-3.25
COPPER PLATING	25µ MINI (recommended 50µ maxi)	25µ MINI (recommended 50µ maxi)	25µ MINI (recommended 50µ maxi)	25µ MINI (recommended 50µ maxi)
TIN LEAD PLATING	15µ MAXI (recommended 5µ mini)		25µ MINI (recommended 50µ maxi)	
FINISH HOLE(AFTER REFLOW)	Ø 0.94-1.09	Ø 1.00-1.09	Ø 3.02-3.20	Ø 3.08-3.20
TIN PLATING		0.8 to 1.2µ		0.8 to 1.2µ

NOTE1: THESE DIMENSIONS MUST BE RESPECT TO SECURE PRESS-FIT PIN PERFORMANCES.

NOTE-2: ACCORDING TO IEC -352-5 SPEC.

NOTE-3: MAJOR REQUIEREMENT FOR PRESS-FIT PIN PERFORMANCE

PLATING FOR TIN LEAD VERSIONS

CONTACT:

- GOLD OVER NICKEL ON MATING SURFACES
- TIN LEAD OVER NICKEL ON TERMINATION PARTS

SHELL AND ACCESSORIES TIN LEAD OVER COPPER


PLATING FOR TIN VERSIONS, TERMINATIONS LF ONLY

NOTE RoHS INFORMATIONS

- The "LF" products meet European union Directives and other country regulations as described in GS-22-008
- Active Part : Gold over Nickel
- Termination plating spec: 0.5 to 3 µm Nickel, 0.5 to 1.5 µm Sn
- Shell plating: 2 to 4 µm Cu + 3 to 10 µ Sn (pure bright)
- Accessories: Sn pure bright
- Packaging spec: see GS-14-920


PRESS-FIT PERFORMANCE

	PRESS-FIT CONTACTS	PRESS-FIT HARPOONS
INSERTION FORCE	< 100N	< 120N
SnPb/Sn EXTRACTION FORCE	> 30N	> 30N
Copper EXTRACTION FORCE	> 20N	> 20N

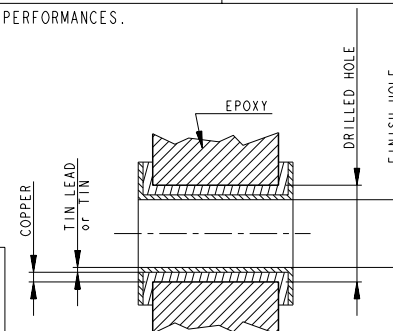

RIGHT ANGLED

STRAIGHT

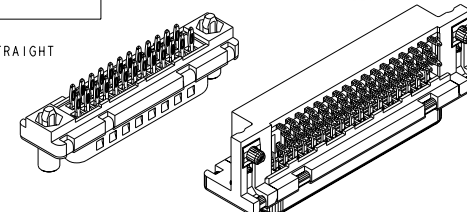

A FCI www.fciconnect.com			surface - ✓ ISO 1302		tolerance ISO 406 ISO 1101		projection		mm	
Dr	JOUBERT	01/10/96	Product family -			size	Scale			
Eng	PESSON	01/10/96	Spec ref			A3	1:1			
Chr	LEGARE	01/10/96	Material			SEE NOTES	ECN		LS05-0056	
Appr	LEGARE	01/10/96								
title DELTA D PRESSFIT CONNECTORS GENERAL CHARACTERISTICS					dwg no C01-8646-0001				Rev E	
catalog no -					CUSTOMER COPY			sheet 1 of 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol:

<u>D09S91C6PX00LF</u>	<u>D09P80C4PA00LF</u>	<u>D09P80C6GV00LF</u>	<u>D09P80C6GX00LF</u>	<u>D09P80C6PA00LF</u>
<u>D09P81C4GV00LF</u>	<u>D09P81C6GL00LF</u>	<u>D09P81C6GV00LF</u>	<u>D09P81C6GX00LF</u>	<u>D09P82C4GL00LF</u>
<u>D09P82C4GV00LF</u>	<u>D09P82C4GX00LF</u>	<u>D09P82C6GL00LF</u>	<u>D09P82C6GV00LF</u>	<u>D09P82C6GX00LF</u>
<u>D09P82C6PA00LF</u>	<u>D09P90C6GL00LF</u>	<u>D09P90C6GV00LF</u>	<u>D09P90C6PA00LF</u>	<u>D09P90C6PV00LF</u>
<u>D09P90C6PX00LF</u>	<u>D09P91C4GV00LF</u>	<u>D09P91C4PA00LF</u>	<u>D09P91C4PL00LF</u>	<u>D09P91C4PV00LF</u>
<u>D09P91C4PX00LF</u>	<u>D09P91C6GV00LF</u>	<u>D09P91C6GX00LF</u>	<u>D09P91C6PA00LF</u>	<u>D09P91C6PL00LF</u>
<u>D09P91C6PV00LF</u>	<u>D09P91C6PX00LF</u>	<u>D09S80C6GV00LF</u>	<u>D09S80C6GX00LF</u>	<u>D09S80C6PA00LF</u>
<u>D09S81C4GL00LF</u>	<u>D09S81C4GX00LF</u>	<u>D09S81C6GL00LF</u>	<u>D09S81C6GV00LF</u>	<u>D09S81C6GX00LF</u>
<u>D09S82C4GL00LF</u>	<u>D09S82C4GV00LF</u>	<u>D09S82C4GX00LF</u>	<u>D09S82C6GL00LF</u>	<u>D09S82C6GV00LF</u>
<u>D09S82C6GX00LF</u>	<u>D09S90C4PA00LF</u>	<u>D09S90C6GL00LF</u>	<u>D09S90C6GV00LF</u>	<u>D09S90C6GX00LF</u>
<u>D09S90C6PV00LF</u>	<u>D09S90C6PX00LF</u>	<u>D09S91C4GV00LF</u>	<u>D09S91C4GX00LF</u>	<u>D09S91C4PA00LF</u>
<u>D09S91C4PL00LF</u>	<u>D09S91C4PV00LF</u>	<u>D09S91C4PX00LF</u>	<u>D09S91C6GL00LF</u>	<u>D09S91C6GV00LF</u>
<u>D09S91C6GX00LF</u>	<u>D09S91C6PA00LF</u>	<u>D09S91C6PL00LF</u>	<u>D09S91C6PV00LF</u>	<u>D15P80C6GL00LF</u>
<u>D15P80C6PA00LF</u>	<u>D15P81C6GL00LF</u>	<u>D15P81C6GX00LF</u>	<u>D15P82C4PA00LF</u>	<u>D15P82C6GL00LF</u>
<u>D15P82C6GX00LF</u>	<u>D15P90C6GV00LF</u>	<u>D15P90C6PA00LF</u>	<u>D15P90C6PV00LF</u>	<u>D15P90C6PX00LF</u>
<u>D15P91C4GV00LF</u>	<u>D15P91C4PA00LF</u>	<u>D15P91C4PL00LF</u>	<u>D15P91C4PV00LF</u>	<u>D15P91C4PX00LF</u>
<u>D15P91C6GL00LF</u>	<u>D15P91C6GV00LF</u>	<u>D15P91C6PA00LF</u>	<u>D15P91C6PL00LF</u>	<u>D15P91C6PV00LF</u>
<u>D15P91C6PX00LF</u>	<u>D15S80C6GX00LF</u>	<u>D15S80C6PA00LF</u>	<u>D15S81C4GX00LF</u>	<u>D15S81C6GL00LF</u>
<u>D15S81C6GX00LF</u>	<u>D15S82C4GL00LF</u>	<u>D15S82C4GX00LF</u>	<u>D15S82C6GL00LF</u>	<u>D15S82C6GV00LF</u>
<u>D15S82C6GX00LF</u>	<u>D15S90C6GV00LF</u>	<u>D15S90C6GX00LF</u>	<u>D15S90C6PA00LF</u>	<u>D15S90C6PV00LF</u>