
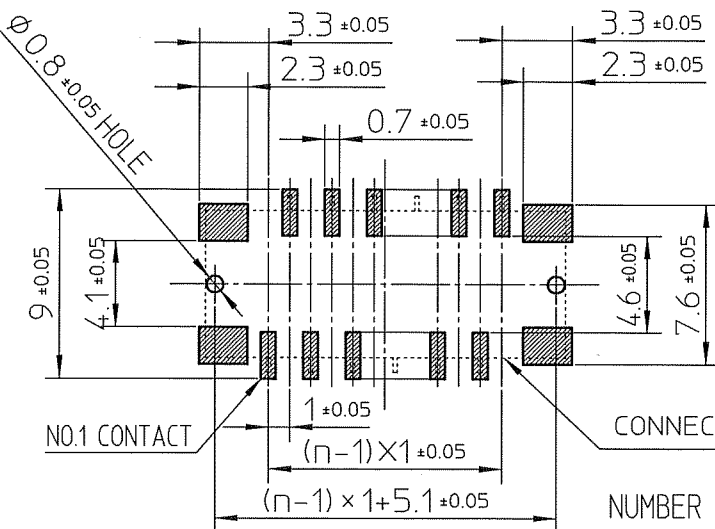



RECOMMENDED PC BOARD LAYOUT
(COMPONENT SIDE)



NOTE

- 1.This connector is symmetric for X,Y axis.
As a result, It is possible to locate in emboss cavity even if rotated condition.
- 2.Flatness for contact terminal and mounting plate must be within 0.1.
- 3.This product meets European Union Directives and other country regulations as described in GS-22-008.

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 590F											
ltr	ecn no		dr	date		tolerances unless otherwise specified						title FLOATING BOARD TO BOARD PLUG CONNECTOR (GOLD PLATING AND LEAD FREE) (Cat.No. BTFW__P-3SBTALF)									
A	J06-0146		M.K	Apr.11/06		angles linear															
B	J07-0021		M.K	Jan.15/07				± 0.3													
												scale									
						dr	K.Higuchi		Jan.15/07				dwg no						sheet 2 of 2		size
						engr	M.Koga		Jan.15/07				JSA 96388						A4		
						chr	K.Higuchi		Jan.15/07												
						appd	M.Koga		Jan.15/07												
sheet index		revision sheet		B	B														Rev		
				1	2														B		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[BTFW14P-3SBTAE1LF](#) [BTFW10P-3SBTAE1LF](#) [BTFW22P-3SBTAE1LF](#) [BTFW26P-3SBTAE1LF](#) [BTFW30P-3SBTAE1LF](#) [BTFW20P-3SBTAE4LF](#) [BTFW22P-3SBTAE4LF](#) [BTFW16P-3SBTAE4LF](#)