

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC


Product Specification

▶ Domestic	Part Number	BTA12
▶ Overseas	Part Number	BTA12
▶ Equivalent	Part Number	BTA12

EV is the abbreviation of name EVVO


Product features and main applications:

NPNP five-layer structure of silicon bidirectional devices; with independent intellectual property rights of single-sided digging technology, table glass passivation process; multi-layer metallized electrodes on the back; with high blocking voltage and high temperature stability.



Mainly used in:

vacuum cleaners, power tools and other motor speed controllers; solid state relays; heating controllers (temperature regulation); other phase control circuits.



Characteristics

Table 1. Absolute maximum ratings (Tj = 25 ° C unless otherwise stated)

Symbol	Parameter name			value	Unit
$I_{T(RMS)}$	RMS on-state current (full sine wave)	BTA	$T_c=80^{\circ}C$	12	A
I_{TSM}	Non repetitive surge peak on-state current (full cycle, T_j initial = $25^{\circ}C$)	$F=50HZ$ $t_p=20ms$		120	A
I^2t	I^2t value for fusing	$t_p=10ms$		72	A^2S
di/dt	Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$, $t_r \leq 100\text{ ns}$	$T_j=125$		50	A/us

V_{DRM}/V_{RRM}	Off state repetitive peak voltage Reverse repetitive peak voltage	$T_j=25^{\circ}\text{C}$		600/800	V
I_{GM}	Peak gate current	$t_p=20\mu\text{s}$	$T_j=150^{\circ}\text{C}$	4	A
$P_{G(AV)}$	Average gate power dissipation		$T_j=150^{\circ}\text{C}$	1	W
T_{stg} T_j	Storage junction temperature range Operating junction temperature range			-40 to +150 -40 to +125	$^{\circ}\text{C}$

Table 2. Electrical characteristics ($T_j = 25^{\circ}\text{C}$, unless otherwise specified) --3 quadrants

Symbol	Name and test conditions	Quadrant	Range	value				Unit
I_{GT}	$V_D=12\text{V}$ $R_L=100\Omega$	I II III	MAX	BW	CW	SW	TW	mA
				50	35	10	5	
V_{GT}			MAX	1.5				V
V_{GD}	$V_D = V_{DRM}$ $R_L = 3.3\text{ k}\Omega$, $T_j = 125^{\circ}\text{C}$		MIN	0.2				V
I_H	$I_T = 100\text{ mA}$		MAX	60	40	20	15	mA
I_L	$I_G = 1.2 \times I_{GT}$		MAX	100	60	40	30	mA
dv/dt	$V_D = 67\% V_{DRM}$, gate open, $T_j = 125^{\circ}\text{C}$		MIN	500	500	200	100	V/ μs
$(dv/dt)_c$	Critical rise rate of commutation voltage $T_J = 150^{\circ}\text{C}$		MIN	8				V/ μs

Table 3 Electrical characteristics ($T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise specified) -Standard Triac (4 quadrants)

Symbol	Name and test conditions	Quadrant	Range	value		Unit
				B	C	
I_{GT}	$V_D=12V$ $R_L=100\Omega$	I - II -III	MAX	50	20	mA
		IV		100	60	
V_{GT}		ALL	MAX	1.5		V
V_{GD}	$V_D = V_{DRM}$, $R_L = 3.3\text{ k}\Omega$, $T_j = 125\text{ }^{\circ}\text{C}$	ALL	MIN	0.2		V
I_H	$I_T=500\text{mA}$		MAX	60	50	mA
I_L	$I_G = 1.2 \times I_{GT}$	I - II -III	MAX	60	50	mA
		IV		100	80	
dv/dt	$V_D = 67\% V_{DRM}$, gate open, $T_j = 125\text{ }^{\circ}\text{C}$		MIN	500		V/us
(dv/dt) _c	Critical rise rate of commutation voltage $T_J = 150\text{ }^{\circ}\text{C}$		MIN	10		V/us

Static parameters

Symbol	Parameter name			value	Unit
V_{TM}	$I_{TM} = 24A$	$T_j = 25^{\circ}C$	MAX	1.50	V
V_{TO}	threshold on-state voltage	$T_j = 150^{\circ}C$	MAX	0.86	V
R_d	Dynamic resistance	$T_j = 150^{\circ}C$	MAX	36.6	mΩ
I_{DRM} I_{RRM}	$V_{DRM} = V_{RRM}$	$T_j = 25$	MAX	5	uA
		$T_j = 150$		1	mA
$R_{th(j-c)}$	Junction to ambient	BTA	MAX	2.05	$^{\circ}C/W$

BTA12 characteristic curve

FIG.1 Maximum power dissipation versus RMS on-state current

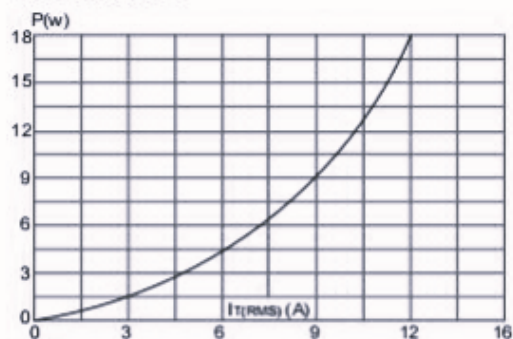


FIG.3: Surge peak on-state current versus number of cycles

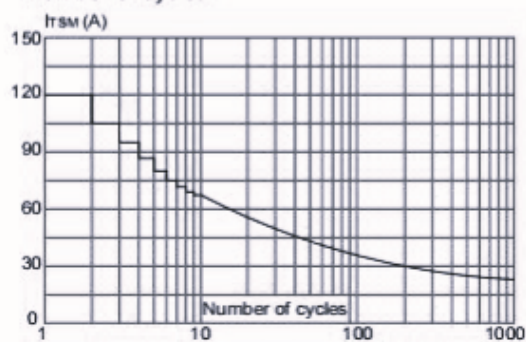


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10\text{ms}$, and corresponding value of $I^2 t$ ($di/dt < 50\text{A}/\mu\text{s}$)

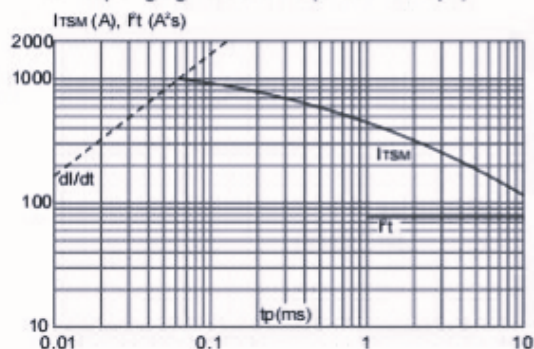


FIG.2 RMS on-state current versus case temperature

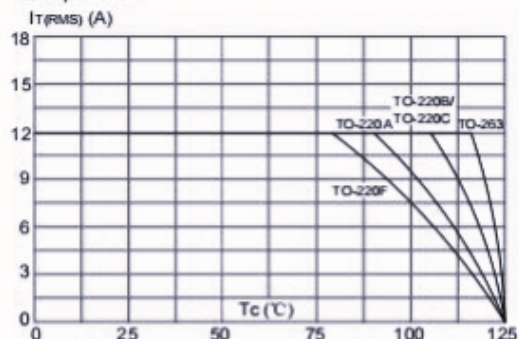


FIG.4: On-state characteristics (maximum values)




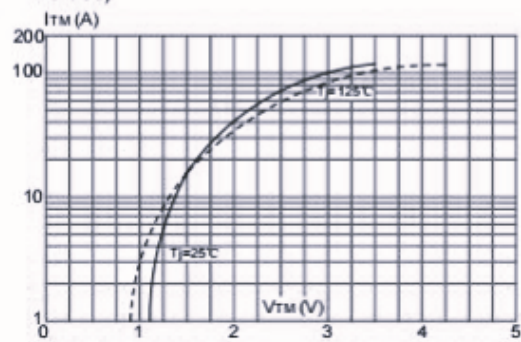


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

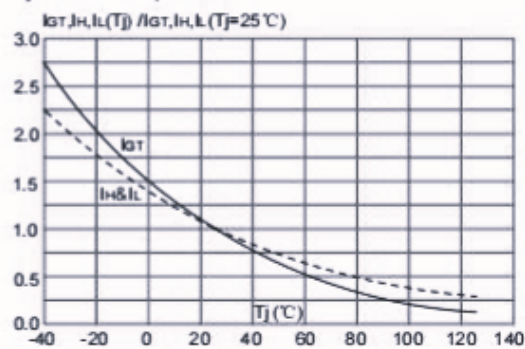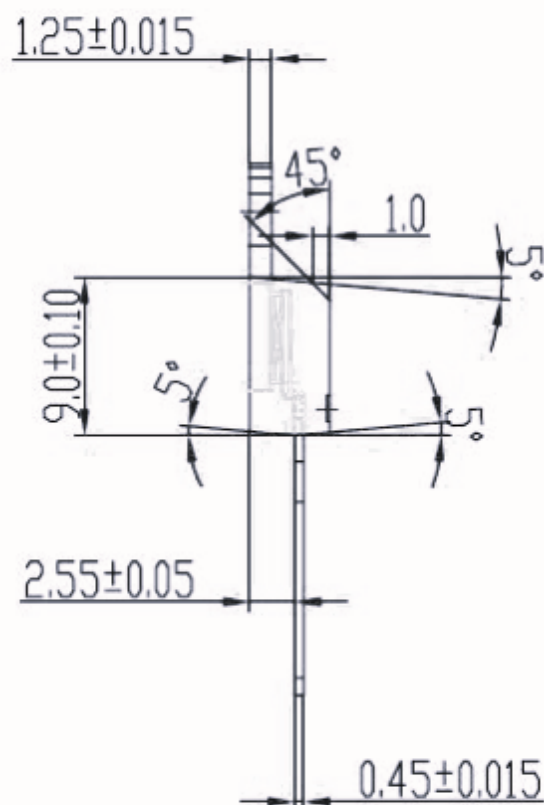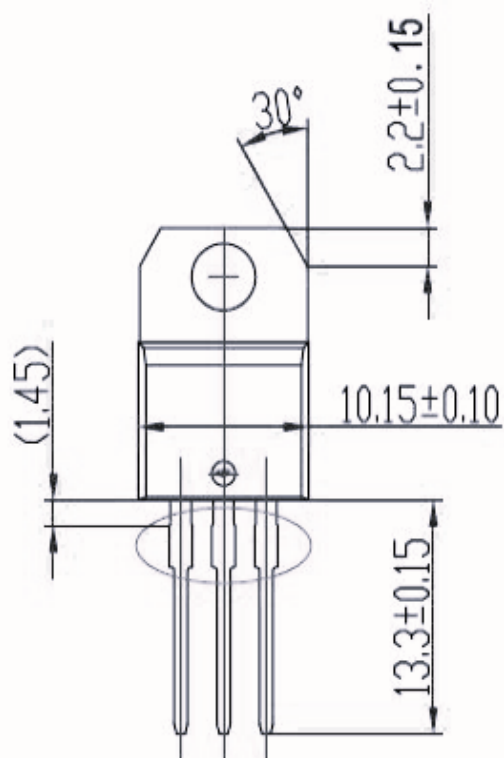

TO-220 Dimensional drawing:Unit: mm (± 0.1)

Ordering information

Order code	Package	Baseqty	Deliverymode
BTA12-600BRG	TO-220A	1000	Tube and box
BTA12-600CRG	TO-220A	1000	Tube and box
BTA12-800BRG	TO-220A	1000	Tube and box
BTA12-800CRG	TO-220A	1000	Tube and box
BTA12-600BWRG	TO-220A	1000	Tube and box
BTA12-600CWRG	TO-220A	1000	Tube and box
BTA12-800BWRG	TO-220A	1000	Tube and box
BTA12-800CWRG	TO-220A	1000	Tube and box
BTA12-600SWRG	TO-220A	1000	Tube and box
BTA12-600TWRG	TO-220A	1000	Tube and box
BTA12-800SWRG	TO-220A	1000	Tube and box

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.