

Lamp block

704.951.1/D

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.951.1/D>

Your product:



704.951.1/D Lamp block

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1/DIN EN 60947-5-1

MECHANICAL CHARACTERISTIC

Terminal: Double plug-in terminal, 6.3 x 0.8 mm

Switching positions: 3 positions

Weight: 0.013 kg

Wire cross section: Double plug-in terminal 2 x 6.3 mm x 0.8 mm

AMBIENT CONDITION

Shock resistance: Max. 300 m/s², pulse width 11 ms (sinusoidal EN IEC 60068-2-27)

Storage temperature: – 40 °C ... + 85 °C

Vibration resistance: Max. 100 m / s² from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)

Operating temperature: – 40 °C ... + 55 °C

Climate resistance: Relative humidity, max. 95%, non-condensing

IP Protection: IP00


OTHER

Housing material: Plastic

Hints: When using the lamp block, the application guidelines must be observed.

Short Description: Lamp block, Plastic, Double plug-in terminal, 6.3 x 0.8 mm

Dimension drawings:

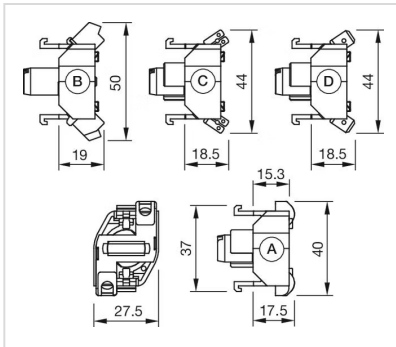

A = Screw terminal
 B = Push-in terminal (PIT)
 C = Plug-in terminal 6.3 mm x 0.8 mm
 D = Double plug-in terminal 6.3 mm x 0.8 mm

Wiring diagrams:

