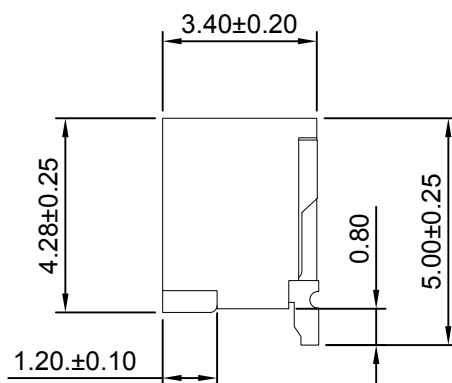
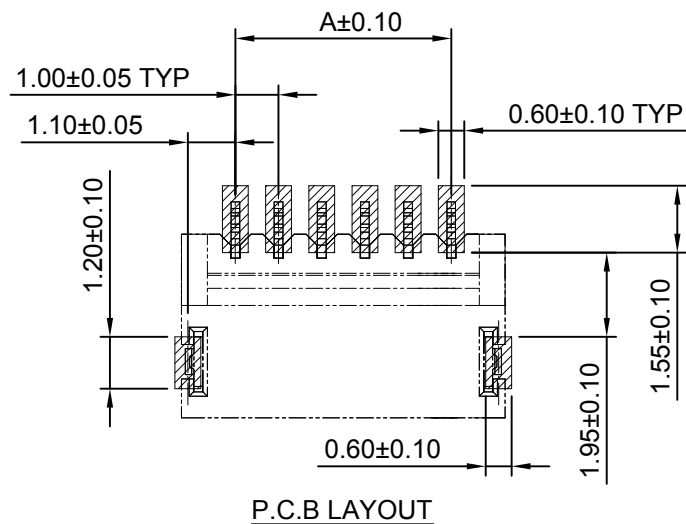
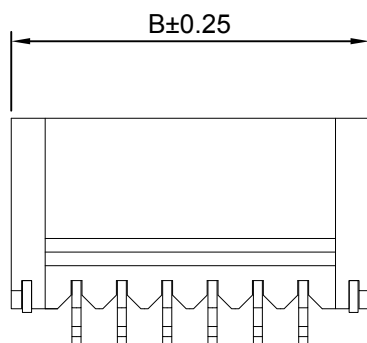
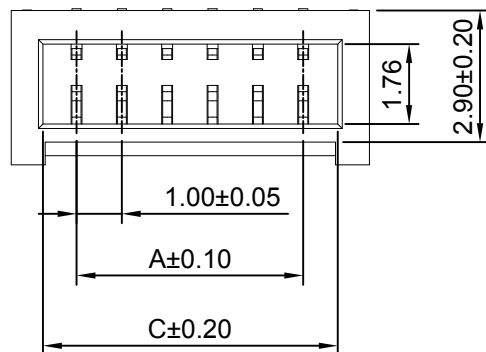


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Solder Tabs: Phosphor Bronze/Tin over Nickel
Material: Nylon 9T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.00	3.90	2.50	12P	11.00	13.90	12.50
3P	2.00	4.90	3.50	13P	12.00	14.90	13.50
4P	3.00	5.90	4.50	14P	13.00	15.90	14.50
5P	4.00	6.90	5.50	15P	14.00	16.90	15.50
6P	5.00	7.90	6.50	16P	15.00	17.90	16.50
7P	6.00	8.90	7.50	17P	16.00	18.90	17.50
8P	7.00	9.90	8.50	18P	17.00	19.90	18.50
9P	8.00	10.90	9.50	19P	18.00	20.90	19.50
10P	9.00	11.90	10.50	20P	19.00	21.90	20.50
11P	10.00	12.90	11.50				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	6:1	1 of 1

Draw BY: Tony Su
Approved: Jack Yin

Title : 1.00mm PITCH

90° Wafer - SMT TYPE

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxxx±0.15	

DRAW NO : A1002WRB-S-XP

REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2012.09.12