
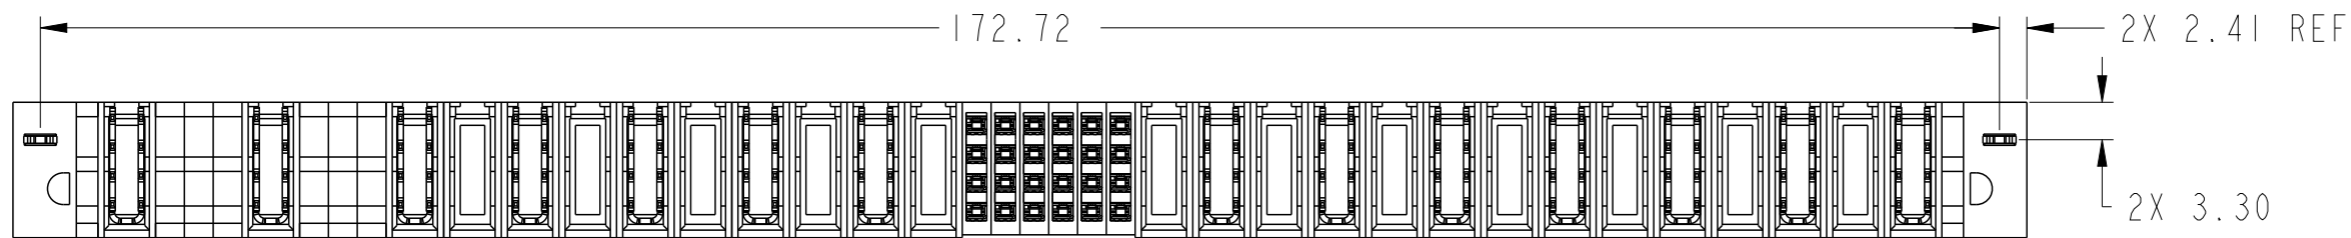


PRODUCT NUMBER SEE SHEET 2


A

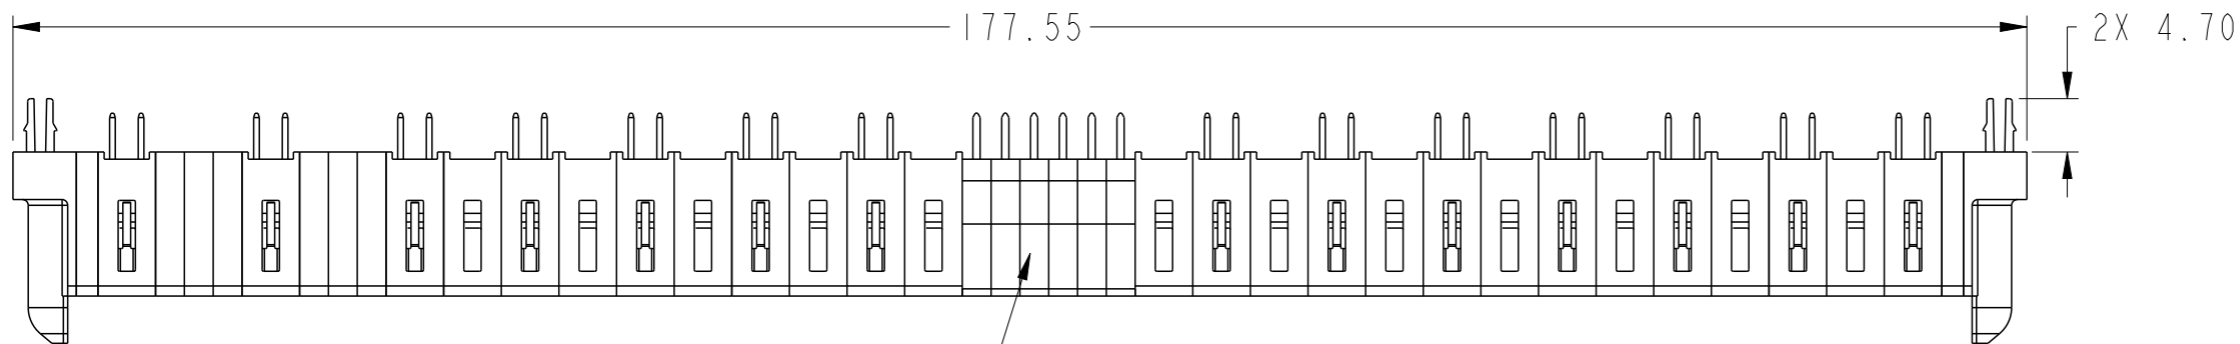






B

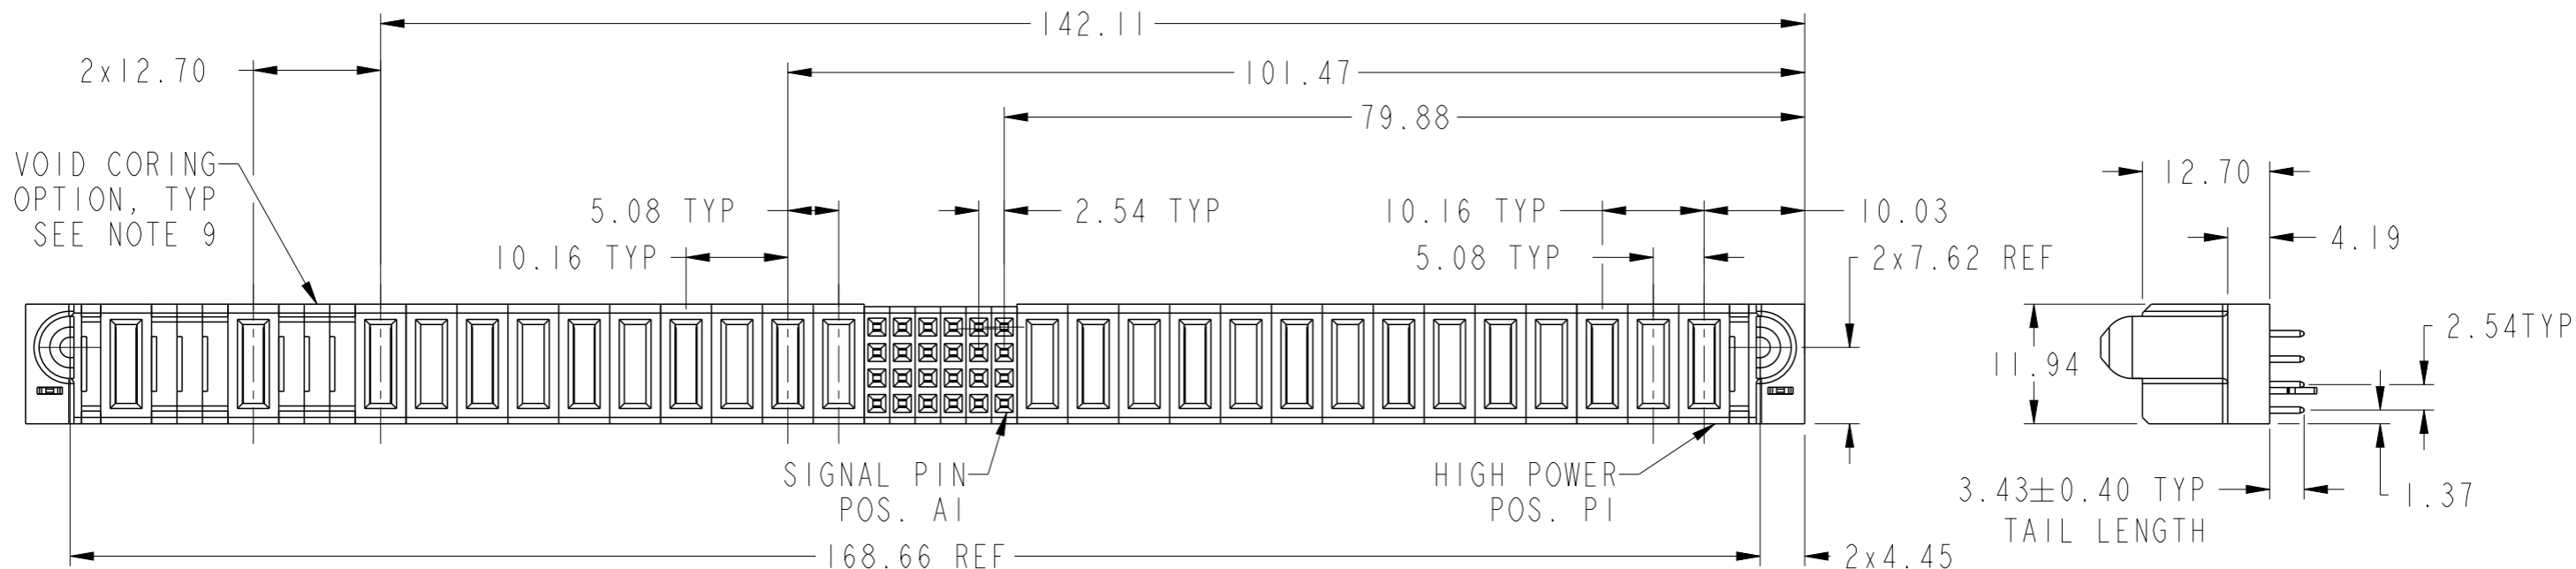

C




D

spec ref				dr		Zhen-Hua Liu	2015/06/16		projection				size		A3	scale		3:2		
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Zhen-Hua Liu	2015/06/26						ecn no -					
ASME Y14.5						chr		Fancy Zhang	2015/06/25											
						appr		Pei-Ming Zheng	2015/06/26										product family	
surface			linear		0.X		±0.50				title 14HP + 24S + 12HP VT STB RECEPTACLE						dwg no 10106268-T006001		rev A	
			0.XX		±0.25															
			0.XXX		±0.10															
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw						sheet 1 of 3		






Copyright FCI.

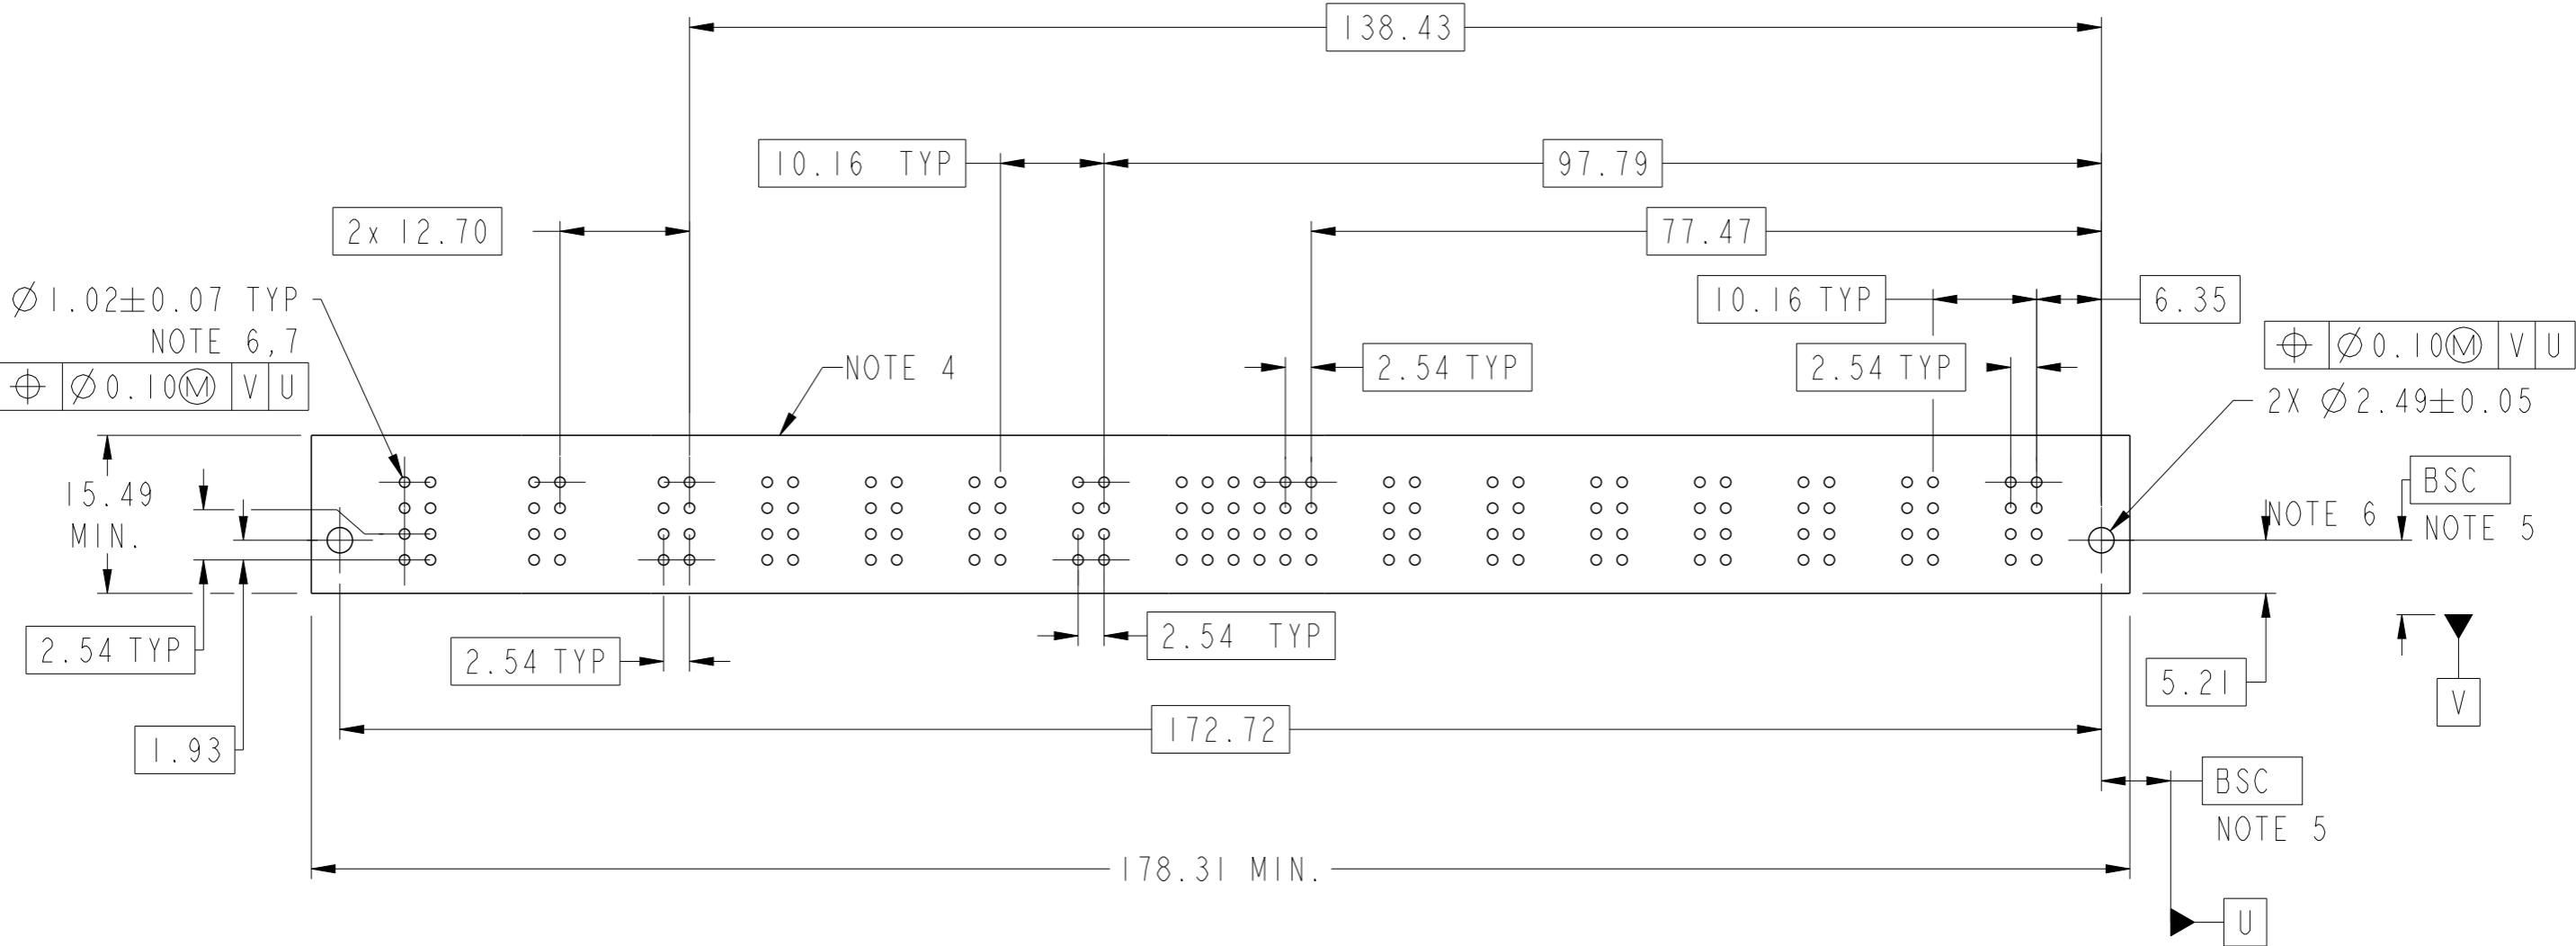PRODUCT NO.	ROWS	HIGH POWER														SIGNAL					HIGH POWER														E2
		E1	P26	P25	P24	P23	P22	P21	P20	P19	P18	P17	P16	P15	6	5	4	3	2	1	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	
10106268-T006001LF	DCBA	HA	H6	H3	H3	X	H3	X	H3	X	H3	X	H3	X	E	E	E	E	E	E	X	H3	X	H3	X	H3	X	H3	X	H3	X	H3	X	H3	HA






CODE	DESCRIPTION
E	STD SIGNAL CONTACT
H3	STD HIGH POWER CONTACT (3.43)
H6	MFBL HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
X	OMITTED

dr	Zhen-Hua Liu	2015/06/16	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2	
eng	Zhen-Hua Liu	2015/06/26			ecn no				-
chr	Fancy Zhang	2015/06/25			rel level				Released
appr	Pei-Ming Zheng	2015/06/26	product family		PowerBlade+				
	title 14HP + 24S + 12HP VT STB RECEPTACLE				dwg no	10106268-T006001		rev  A	
www.fci.com	cat. no.		Product - Customer Drw				sheet 2 of 3		

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
  - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
  - SIGNAL CONTACT - COPPER ALLOY.
  - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07MM HOLE.
- 8) PRODUCT SPECIFICATION : GS-12-658.  
APPLICATION SPECIFICATION : GS-20-141.  
PRODUCT PACKAGE SPECIFICATION : GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL  
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE  
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE  
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Zhen-Hua Liu	2015/06/16	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	scale
eng	Zhen-Hua Liu	2015/06/26			A3	1:1
chr	Fancy Zhang	2015/06/25			ecn no	-
appr	Pei-Ming Zheng	2015/06/26			rel level	Released
			product family	PowerBlade+		
<div></div> <div>www.fci.com</div>			14HP + 24S + 12HP VT STB RECEPTACLE			rev
cat. no.			10106268-T006001			A
Product - Customer Drw			sheet 3 of 3			



Copyright FCI.