

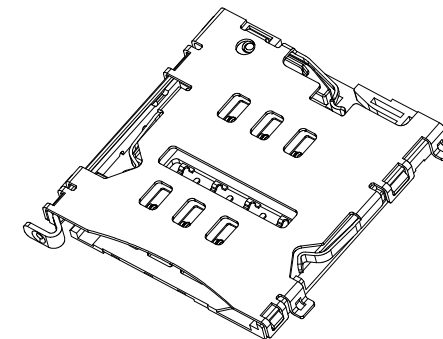
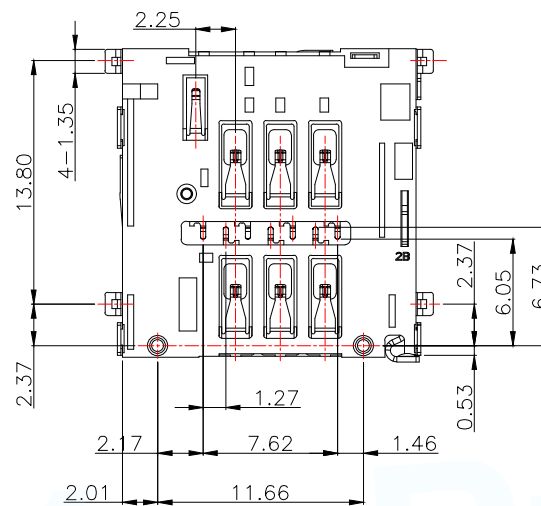







 Material & Finish See Table;

2. Circuit Diagram For Switch



- 3-1.Current Rating :1A max.
- 3-2.Contact Resistance:50mOhms max
- 3-3.Insulation Resistance:1000MOhms^a min./500VDC
- 3-4.Dielectric Withstanding Voltage:500VAC/1minute
- 3-5.Mating Force: 8N Max, Withdrawal Force: 1N Min.;
- 3-6.Durability: 3000 Cycles
- 3-7.Operating Temperature:-25°C to+85°C
- 4. Critical Dimensions Marked "▼" Should Check By QC.

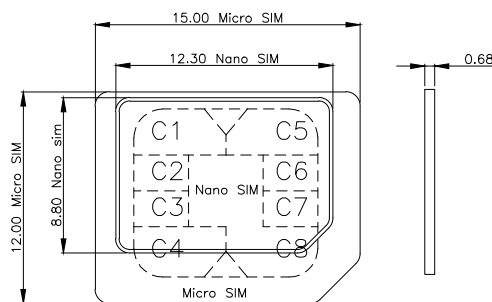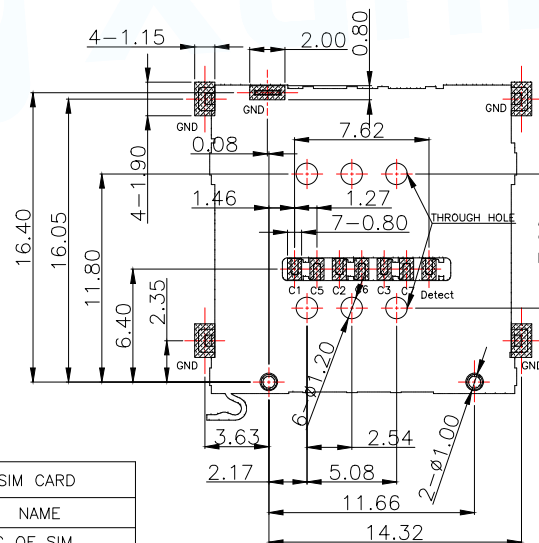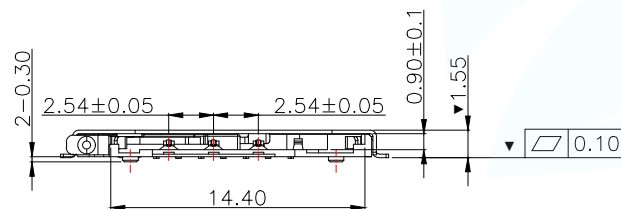

MICRO SIM CARD	
Pin No.	NAME
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	I/O OF SIM
Detect	DETECTION SWITCH

 PAD AREA

KEEP OUT AREA

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ± 0.05

6	Shell	Stainless Steel	Nickel Under Plated Overall.
5	Lever	Stainless Steel	/
4	Cam	Stainless Steel	/
3	Housing	Thermoplastics	Black,UL94V-0
2	Detect	Copper Alloy	Gold Flash on Solder Tails ; Gold Flash on Contact Area; Nickel Under Plated Overall.
1	Terminal	Copper Alloy	
Item	Part Name	Material	Description

MANUFACTURE DWG




东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,Ltd

UNLESS OTHERWISE
SPECIFIED TOLERANCES





TITLE:Micro sim card 7pin 1.5H
CONN.

SPECIFIED TOLERANCES			PAR	SMC-217-ACP7	
DECIMALS:	ANGLES:		DWN		
X.:±0.50	X.:±2°		CHKD		
X.X:±0.30	X.X°:±1°		APVD		
X.XX:±0.20			SCALE:1:1	UNIT:MM	
		CUSTOMER COPY	SIZE:A4	SHEET:1F1	REV:A



A diagram of a two-layered circular structure, possibly a cross-section of a biological specimen or a mechanical component. The top layer is a circular disk with a central hole. It is divided into four segments by radial lines. The segments are labeled with numbers: '1' is at the top, '2' is on the right, '3' is at the bottom, and '4' is on the left. The segments are shaded with horizontal lines. A small rectangular label is attached to the top edge of the top layer. The bottom layer is another circular disk, slightly offset from the top one, showing a similar pattern of segments and a central hole. The segments are also labeled with numbers: '1' is at the top, '2' is on the right, '3' is at the bottom, and '4' is on the left. The segments are shaded with horizontal lines. A small rectangular label is attached to the top edge of the top layer.
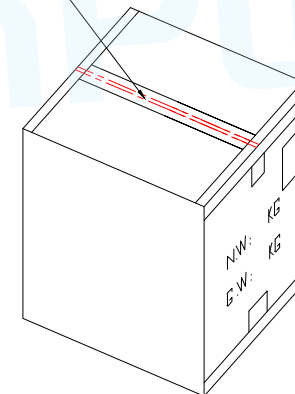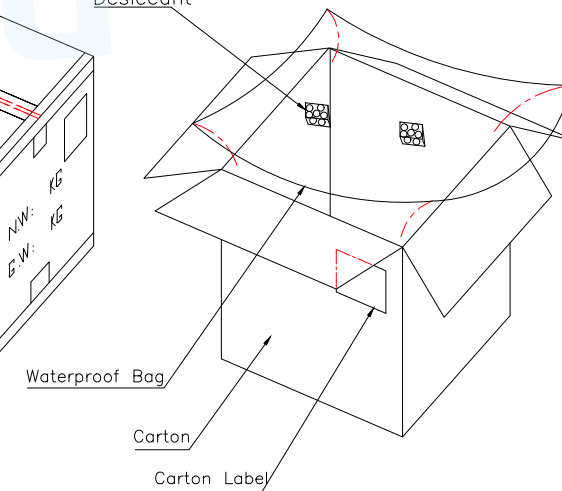
$$\frac{\text{Reel with Product}}{10 \text{ Reel}}$$
Desiccant

Waterproof Bag

Car

Carton L

1. Packing Quantity:1200Pcs/Reel,12Kpcs/Carton;
2. When Carton Fill Zero,Then Fill of Polyethylene Foam;

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:Micro sim card 7pin 1.5H 包装图.		
			PAR	SMC-217-ACP7	
DECIMALS:	ANGLES:		DWN		
X.:±0.50	X*.:±2°		CHKD		
X.X.:±0.30	X.X*.:±1°		APVD		
X.XX.:±0.20		CUSTOMER COPY	SCALE1:1	UNIT:MM	
			SIZE:A4	SHEET:1F1	REV:A