


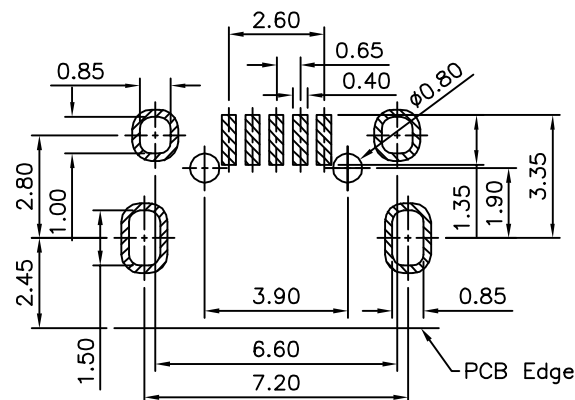
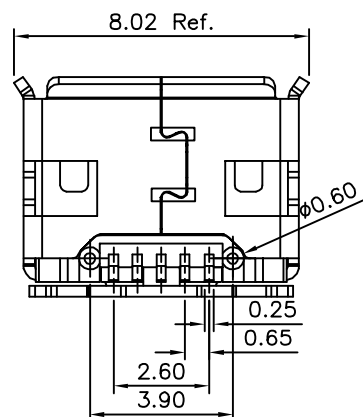
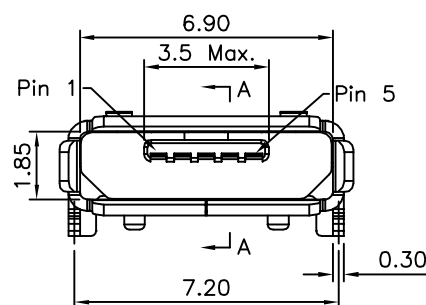


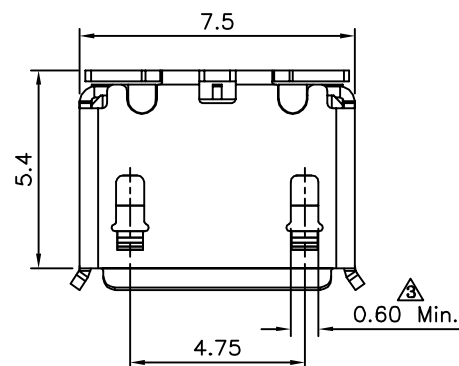

△ Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ± 0.05)

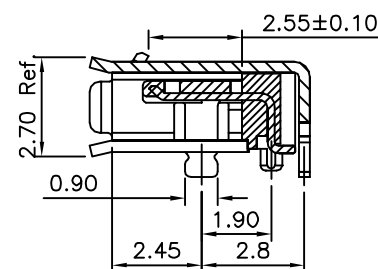

Section A-A



SPECIFICATION

- △ Power Supply: 1.8 Amp (Pin 1, 5), Other Contacts 0.5 Amp
Voltage: 30V Max.
Withstanding Voltage: 100V AC
Insulation Resistance: 100 Megaohms Min.
Contact Resistance: 30 Milliohms Max.
40 Milliohms Max. After 10000 Cycles
Temperature Range: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
Mating Force: 35N Max.
Withdrawal Force: 10N Min.
Durability: 10000 Cycles Min.
8~20N After 10000 Cycles
Insulator: LCP+30%G.F. (UL94V-0)
Contact: Brass
Gold Flash Over All, Over Nickel
△ Shell: SUS301, Nickel Plated Over All
RoHS Compliant

DRAWING No.

20329

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.38 .X* $\pm 2^{\circ}$

.XX ± 0.25 .XX* $\pm 1^{\circ}$

.XXX ± 0.13 .XXX* $\pm 0.5^{\circ}$

UNIT

mm



△ A3

Modify Data

HZF

04/09/2013

△ A2

Modify Data

HZF

02/20/2012

△ A1

Modify Spec.

HZF

12/29/2011

△ A0

NEW RELEASE

HZF

06/13/2011

NO. REV.



REVISIONS

CHK


DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.


SPECIFICATION
Reel:ø330X29mm
Q'ty:1000 PCS/Reel
RoHS Compliant

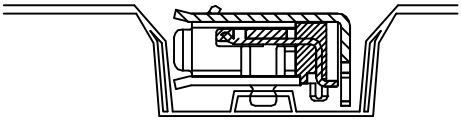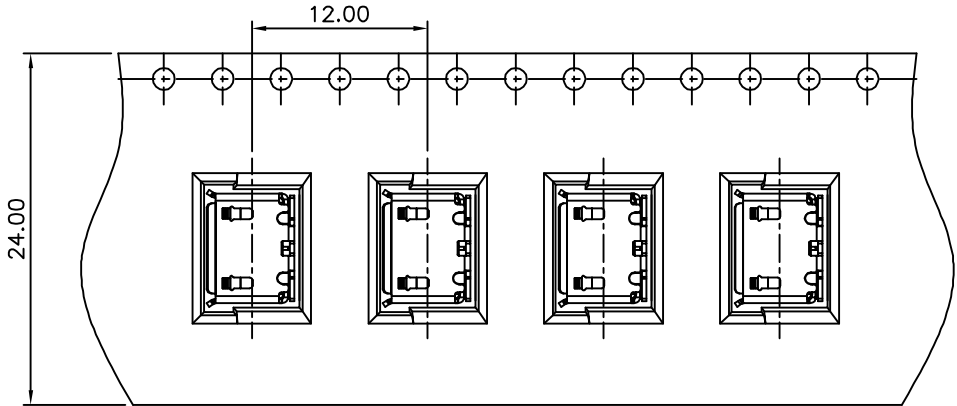

Tape Running Direction

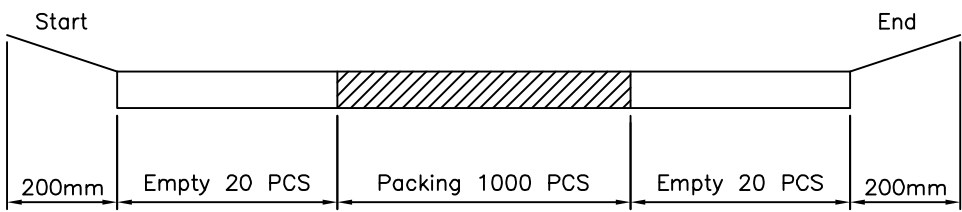

User Direction Of Feed

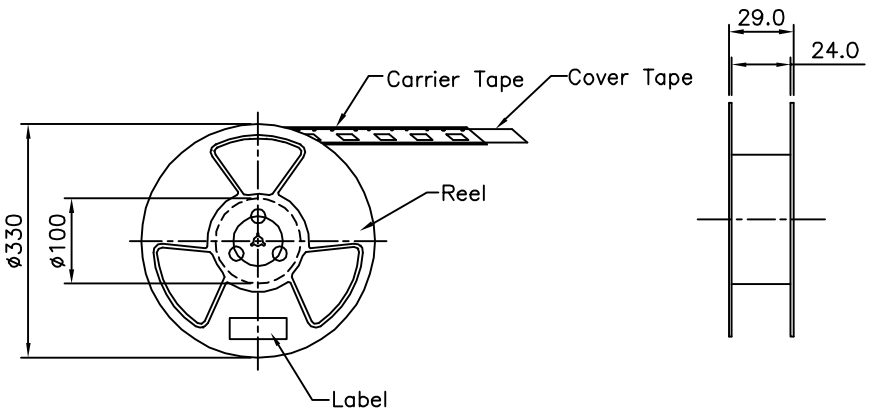

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20329

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE


NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG.

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
1	A3	Modify Data	HZF	04/09/2013
2	A2	Modify Data	HZF	02/20/2012
3	A1	Modify Spec.	HZF	12/29/2011
4	A0	NEW RELEASE	HZF	06/13/2011

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Adafruit:](#)

[1833](#)