




Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

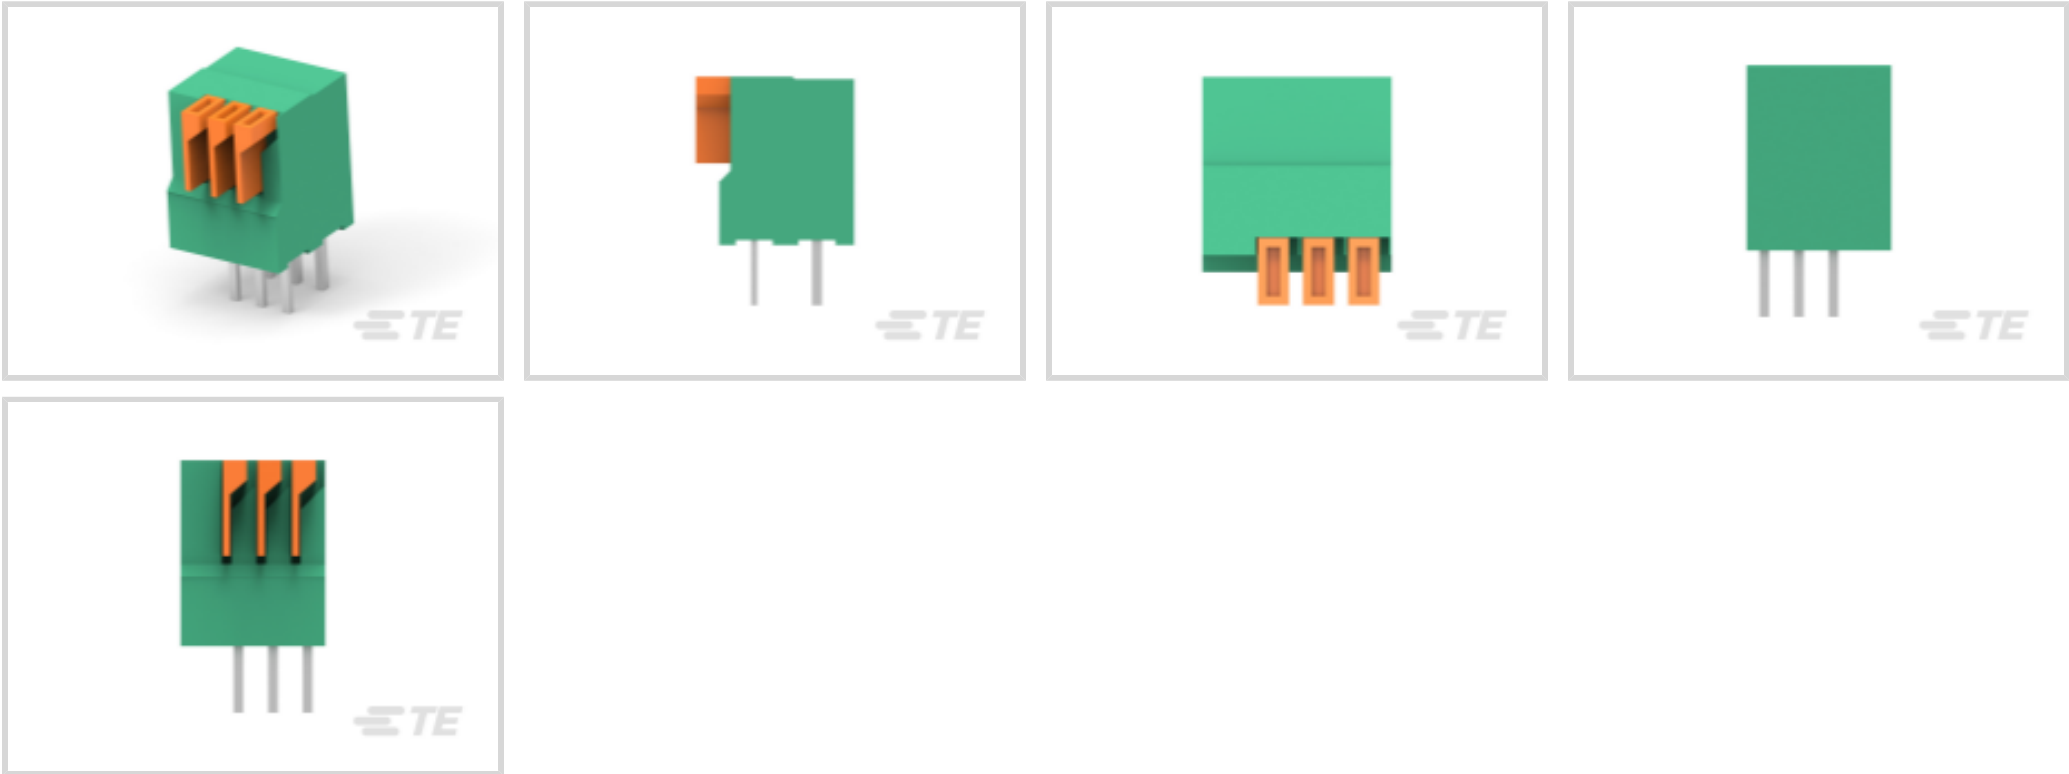

Terminal Block Connector Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **3**

Number of Rows: **1**

Wire Entry Angle: **180°**

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Terminal Block Connector Type     | Receptacle            |
| Connector System                  | Wire-to-Board         |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

|                        |                |
|------------------------|----------------|
| Wire Entry Location    | Top            |
| Stacking Configuration | Side Stackable |
| Number of Positions    | 3              |
| Number of Rows         | 1              |
| Wire Entry Angle       | 180°           |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 300 VAC |
|-------------------|---------|

Body Features

|                       |          |
|-----------------------|----------|
| Primary Product Color | Green    |
| Product Orientation   | Vertical |



Contact Features

|                                      |        |
|--------------------------------------|--------|
| Contact Mating Area Plating Material | Tin    |
| Contact Base Material                | Copper |
| Contact Current Rating (Max)         | 6 A    |

Termination Features

|                                    |                       |
|------------------------------------|-----------------------|
| Termination Method to PCB          | Through Hole - Solder |
| Termination Method to Wire & Cable | Push-in               |

Housing Features

|                  |                                     |
|------------------|-------------------------------------|
| Housing Material | High Temperature Nylon or Polyester |
|------------------|-------------------------------------|

Dimensions

|           |             |
|-----------|-------------|
| Wire Size | 26 – 20 AWG |
|-----------|-------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 105 °C[-40 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Packaging Features

|                  |              |
|------------------|--------------|
| Packaging Method | Box & Carton |
|------------------|--------------|

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                             |
| Solder Process Capability                     | Wave solder capable to 260°C                                                                                                    |

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-B8519-P7565  
Poke-In Connector, BUCHANAN WireMate

TE Part # CAT-SL36-M6642B  
Miniature Headers, SlimSeal

TE Part # 2834334-2  
4.0PITCH ITB CONN\_2P\_W CAP\_NATURAL

TE Part # 2834167-3  
RELEASABLE SLIM CONTACT

TE Part # 2834385-2  
RELEASE POKE-IN CONNECTOR\_2P\_NATURAL

Customers Also Bought

TE Part #3-641127-4  
04P MTA100 HDR ASSY FL/RA LF

TE Part #2176071-2  
SMD Power Resistor: 2 Watt, 3521 Series

TE Part #5-146280-8  
08 MODII HDR SRST B/A .100CL

TE Part #8-327043-1  
PG SPD 22-16 COMM 22-18 MIL 6



Documents

Product Drawings  
3POS 2.54MM TES CONN.  
English

CAD Files  
3D PDF  
3D  
Customer View Model  
ENG\_CVM\_CVM\_1-2834015-3\_1.2d\_dxf.zip  
English  
Customer View Model  
ENG\_CVM\_CVM\_1-2834015-3\_1.3d\_igs.zip  
English  
Customer View Model  
ENG\_CVM\_CVM\_1-2834015-3\_1.3d\_stp.zip  
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages  
Modular Screwless Terminal Blocks Flyer (Chinese)  
BUCHANAN WireMate Connectors Brochure  
BUCHANAN WireMate Connectors Brochure  
English  
Modular Screwless Terminal Blocks Flyer  
English

Product Specifications  
Application Specification  
English

Instruction Sheets  
Instruction Sheet (non U.S.)  
English