

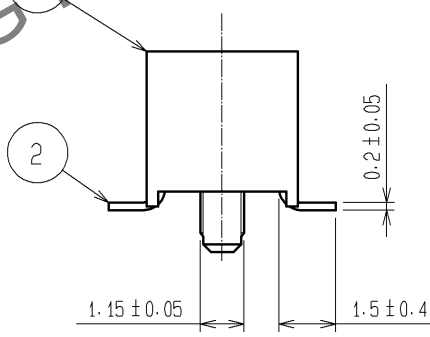
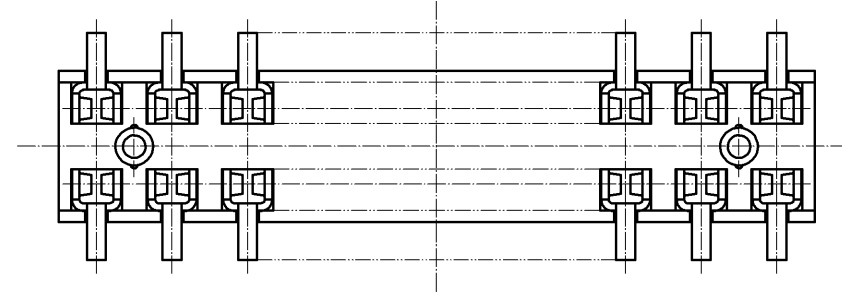
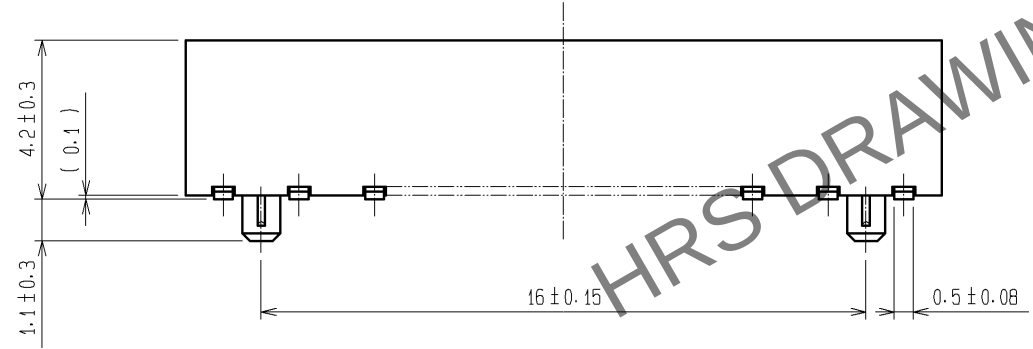


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

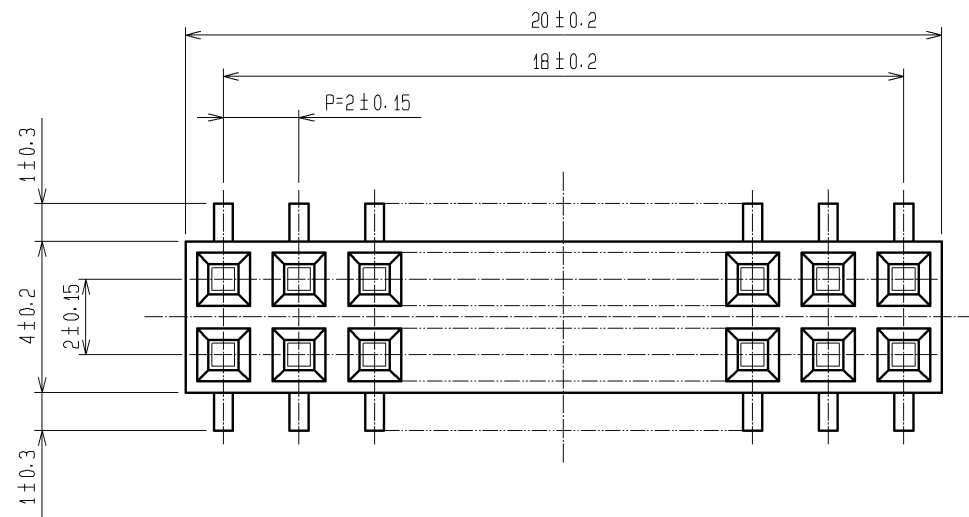

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

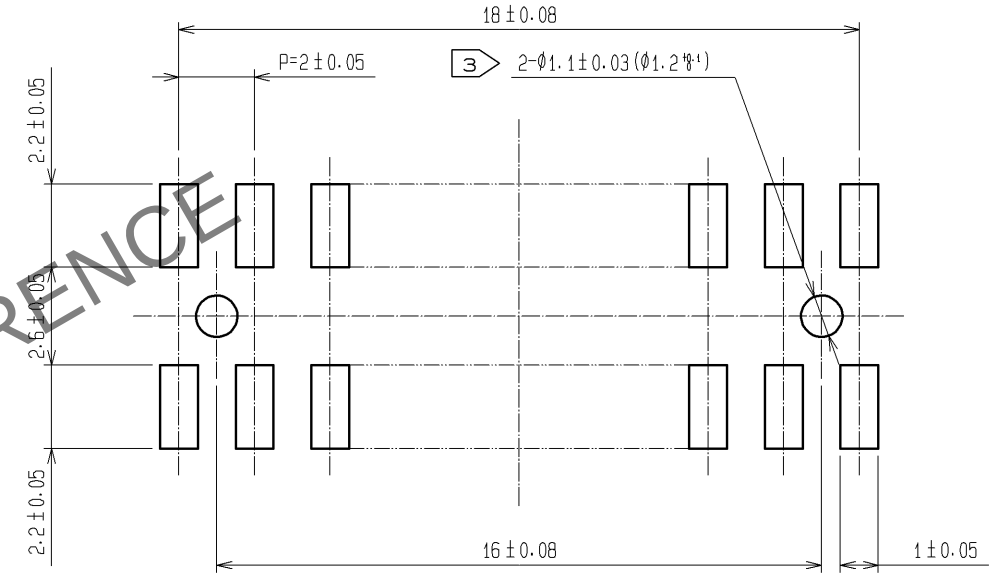

- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 FOR AUTOMATED MOUNTING, RECOMMENDED THROUGH HOLE DIAMETER OF BOSS IS 1.2 1.

1	PPS	LIGHT BROWN / UL94V-0		2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.											
						LEAD AREA:TIN-PLATING 1μm min.											
						UNDER PLATING:NICKEL 1μm min.											
NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS							
UNITS mm				SCALE 5 : 1				COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA				13. 02. 08				DRAWING NO. EDC3-082680-21					
				CHECKED : HT. YAMAGUCHI				13. 02. 08				PART NO. A3A-20DA-2SV(71)					
				DESIGNED : KJ. NISHIWAKI				13. 02. 08				CODE NO. CL621-1148-7-71					
				DRAWN : CR. TAKESHIMA				13. 02. 08				1/1					
5				6				7				8					